


RECOMMENDED P.C.B. LAYOUT





CIRCUIT: SPDT  
CONTACT CONFIGURATION

| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| PDS. 1          | PDS. 2 | PDS. 3 |
|                 |        |        |
| ON              | NONE   | <ON>   |
| 2-3             | NONE   | 2-1    |


( ) = Momentary

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @ 120 VAC or 28 VDC, 1A @ 250 VAC
- ▲ 5. CONTACTS: SILVER
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. HARDWARE TO BE SHIPPED BULK  
T200000-LOCK WASHER-QTY-1  
T200002-LOCK RING-QTY-1  
T200001-HEX NUT-QTY-2

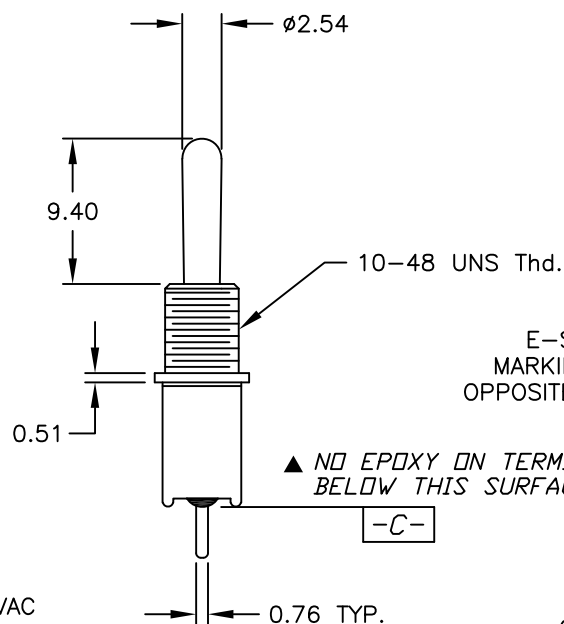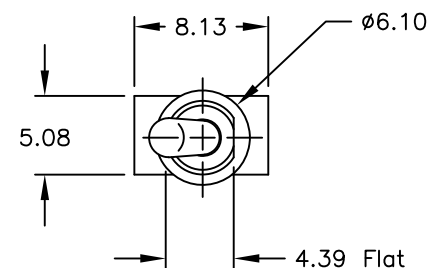

E-SWITCH  
MARKING ON  
OPPOSITE SIDE

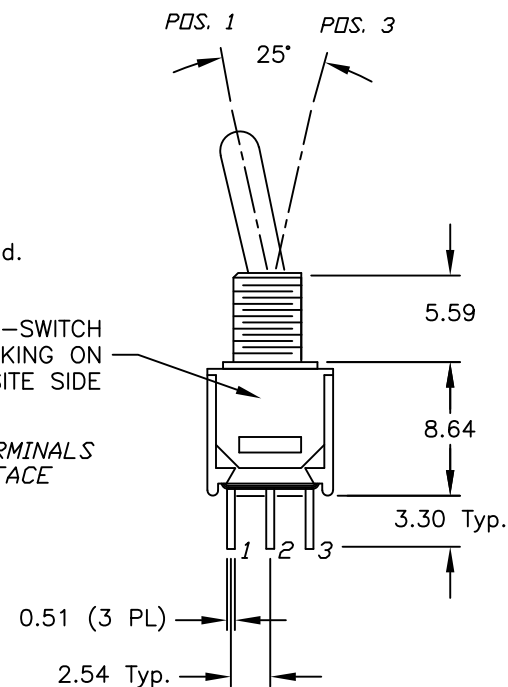

TITLE 200MSP2T1B1M2QEH

SCALE 2:1

DATE 8/4/2015

DR MW

DWG ST213005

REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT  
IS PROPRIETARY TO E-SWITCH AND IS  
NOT TO BE COPIED OR TRANSFERRED