

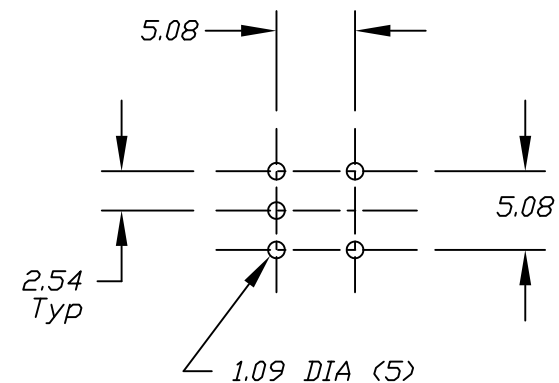


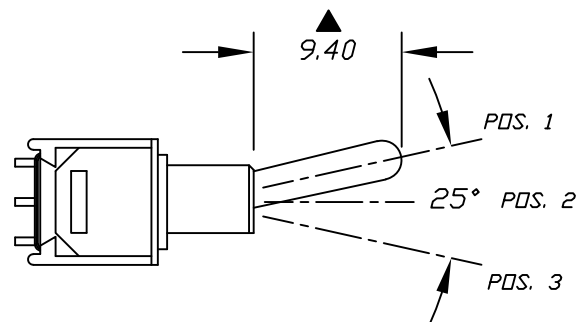

RECOMMEND P.C.B. LAYOUT

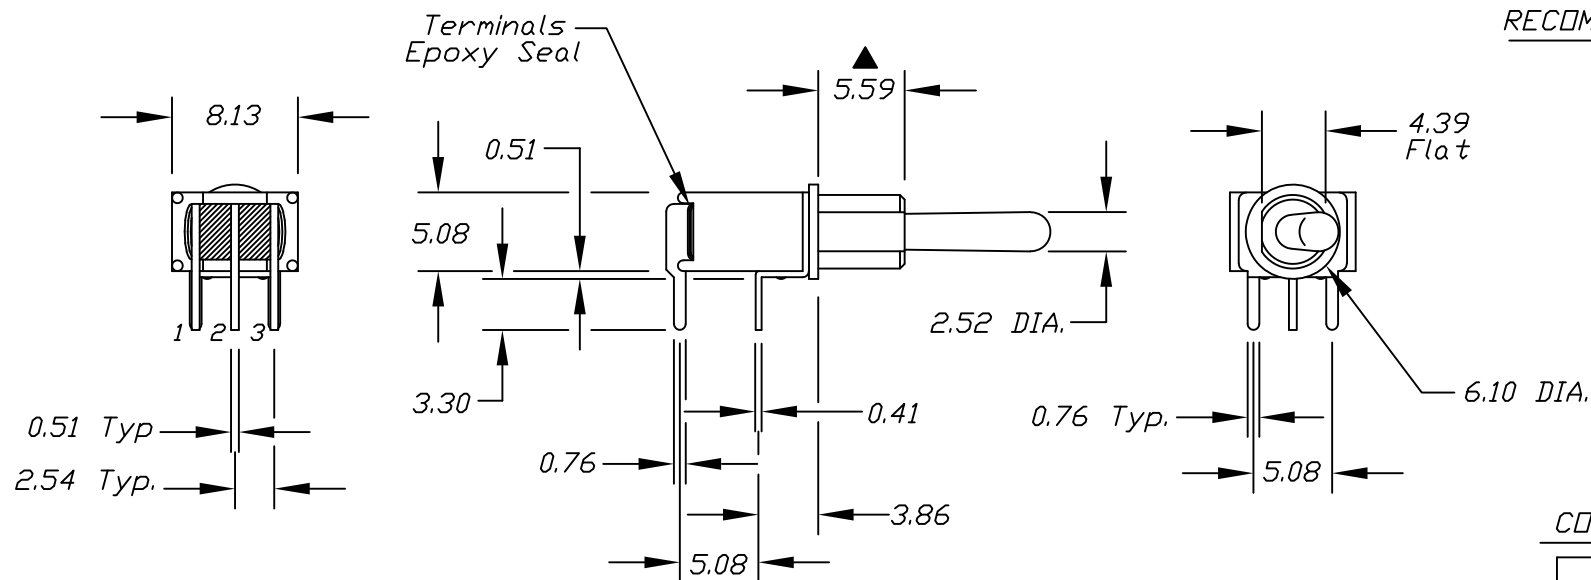

CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	<ON>
2-3	OPEN	2-1

()=Momentary

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
- TERM. NOS. FOR REF. ONLY
- CONTACT RATING: 0.4VA Max. @20VAC or DC Max.
- ELECTRICAL LIFE: 30,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000M ohms min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP: -30°C to 85°C
- DESIGNATE MAJOR DIMENSIONS.

E-SWITCH®

TITLE

200 MSP-2 T1 B2 M6 R E

SCALE

2:1

DATE

10/27/97

DR

MM

DWG

T212000

REV

C

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

C	10452	REVISED & REDRAWN	12/3/99	
REV.	ECN No.	DESCRIPTION	DATE	CHKD