
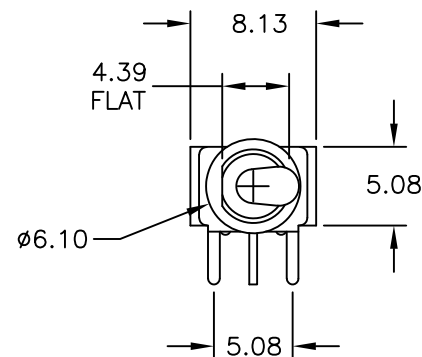
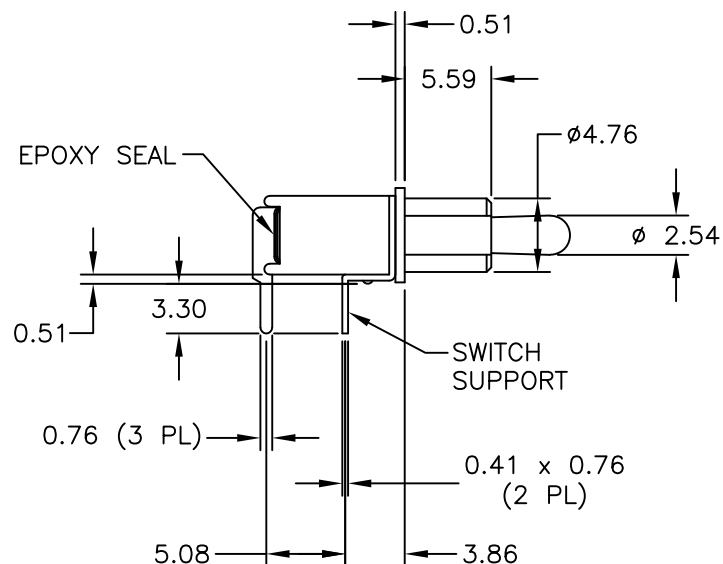
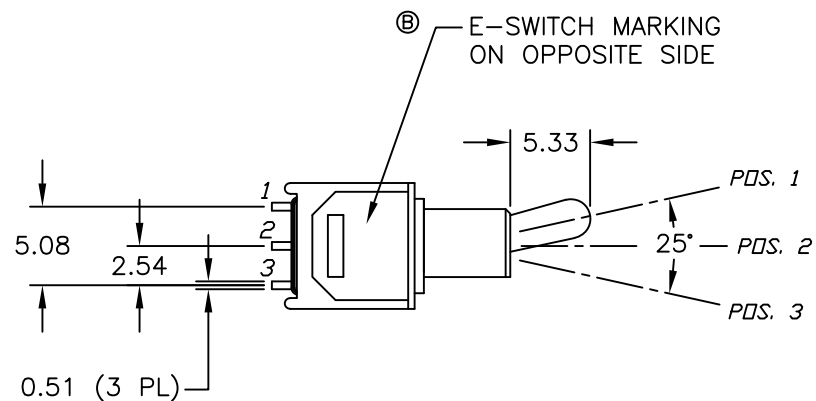


RECOMMENDED PCB LAYOUT



SPDT CIRCUIT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NONE	<ON>
2-3	OPEN	2-1

< > = MOMENTARY

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 0.4 (VA) max. @20 VAC or DC max.
- ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000 Mega-ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
- OPERATING TEMP.: -30°C to 85°C

⑨ E-SWITCH MARKING NOTE ADDED

⑩ SPDT CIRCUIT CHANGED

E-SWITCH®

B	11022	NOTES ADDED	10-19-00	PML
A	10787	RELEASED FOR PRODUCTION	7-18-00	GLG
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

200 MSP2 T2 B2 M6 R E

SCALE

2:1

DATE

7-18-00

DR

GLG

DWG

T211081

REV

B