
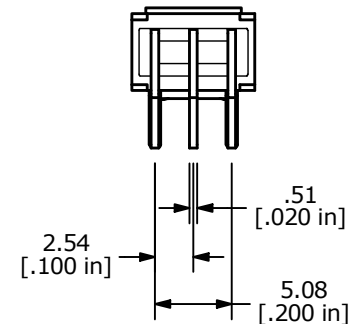
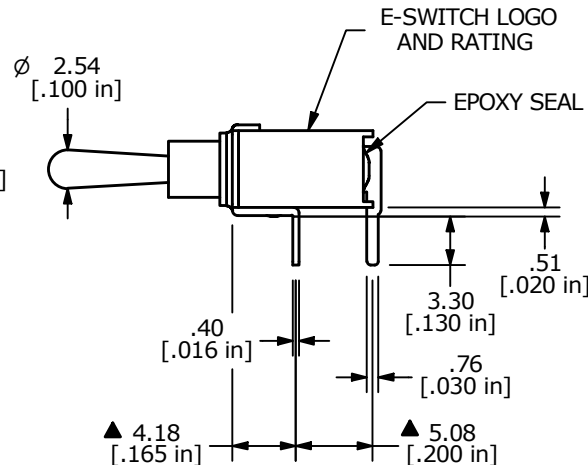
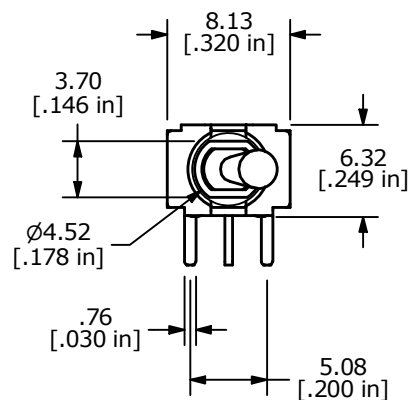
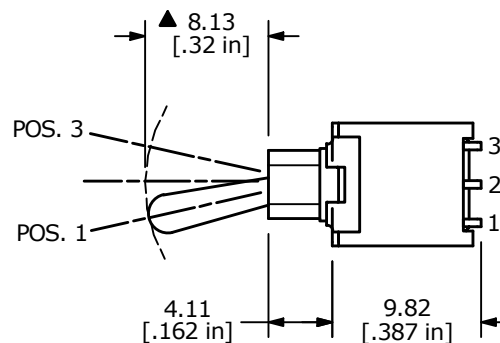


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	N/A	ON
2-3	N/A	2-1



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 3A @ 120VAC or 28VDC
1A @ 250VAC
6. CONTACT RESISTANCE: 20m Ω MAX.
7. LIFE EXPECTANCY: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
8. INSULATION RESISTANCE: 1,000M Ω MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
10. SEAL RATING: IP67
11. OPERATING TEMP.: -30°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-100913	Release	04/20/22	MW						100121736
					TITLE 200AWMSP1T3A1M6QE					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					2:1	4/15/2022	MW	T201256	A	