




▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

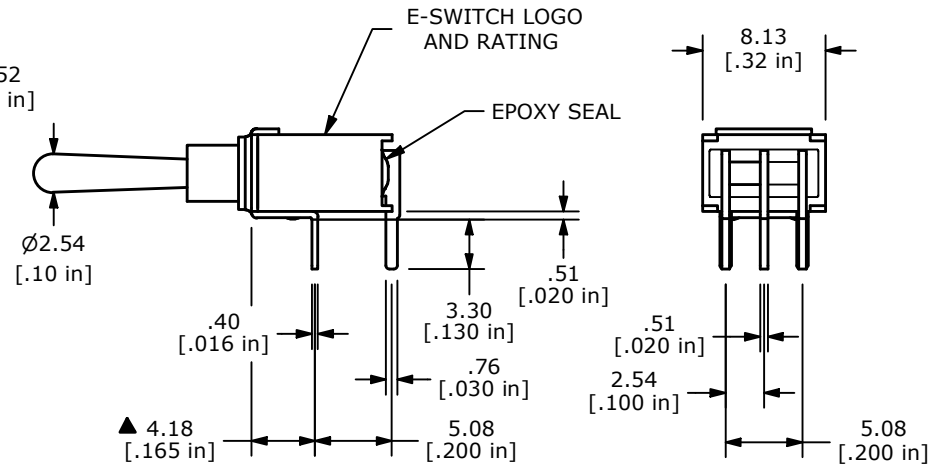

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4VOLT-AMPS MAX. @20V MAX. AC or DC
6. CONTACT RESISTANCE: 20m OHMS MAX.
7. ELECTRICAL LIFE: 6,000 CYCLES
8. MECHANICAL LIFE: 30,000 CYCLES
9. INSULATION RESISTANCE: 1,000M OHMS MIN.
10. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
11. SEAL RATING: IP67
12. OPERATING TEMP.: -40°C to 85°C
13. ▲ DENOTES CRITICAL PARAMETER.

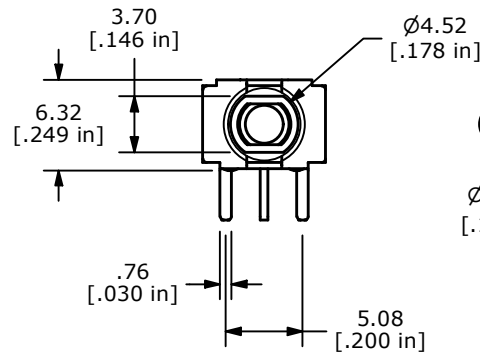

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102798	Release	06/17/24	MW	TITLE 200AWMSP3T1A1M6RE				100127629
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					2:1	6/12/2024	MW	T201258	A