



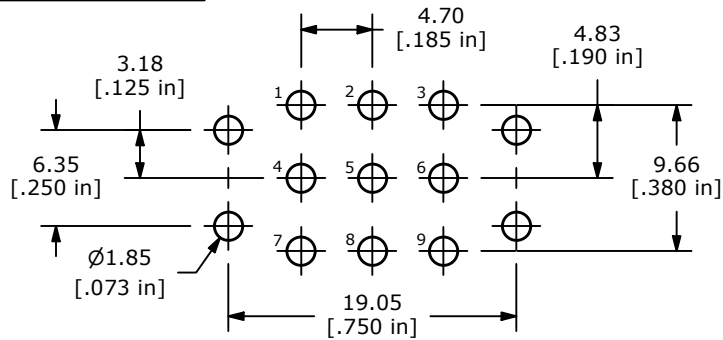

P.C. MOUNTING




▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3,5-6,8-9	N/A	2-1,5-4,8-7

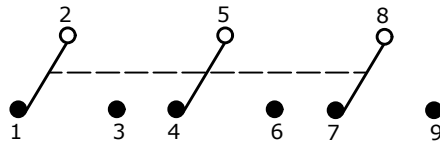

3PDT CIRCUIT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @250VAC
5 AMPS @120VAC OR 28VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER

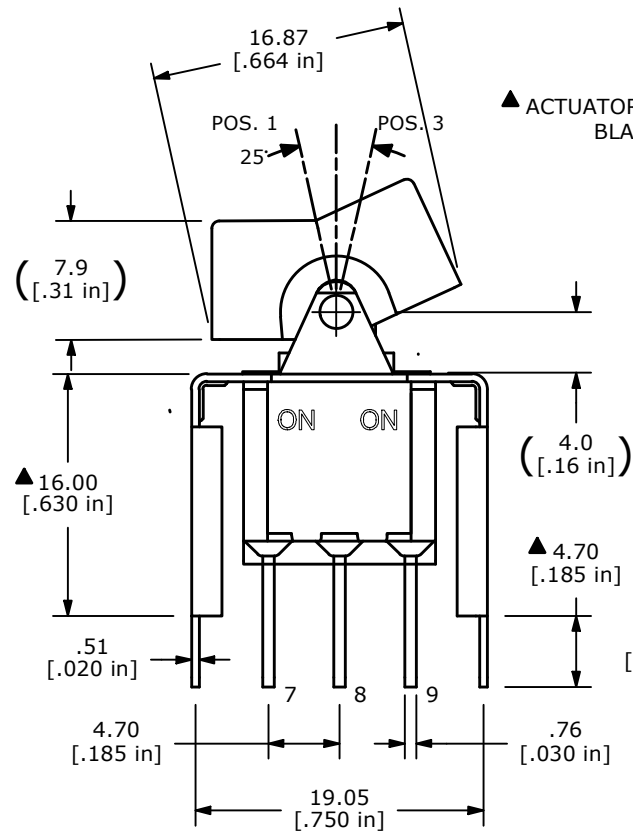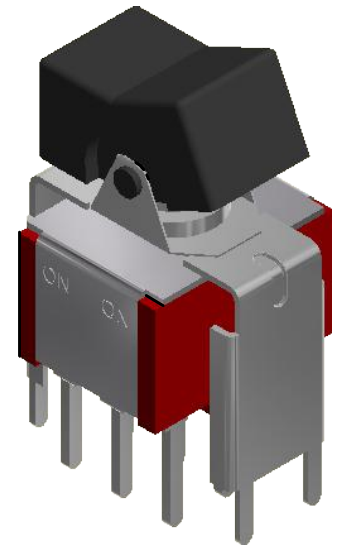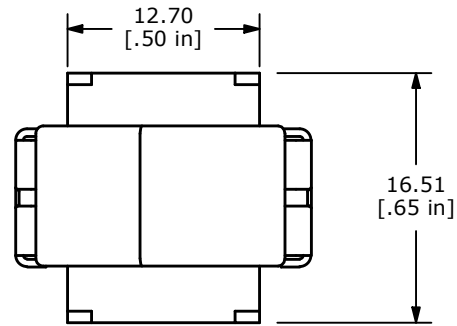

▲ ACTUATOR COLOR: BLACK

9.27
[.365 in]E-SWITCH
MARKING

EPOXY SEAL

1.27
[.050 in]4.83
[.190 in]
6.35
[.250 in]

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-101996	OPERATING TEMP FROM ..-30°C.. TO ..-40°C..	06/13/23	MR



E-SWITCH®

OBJECT ID
000025084

TITLE 3003P1J1BLKVS5QE				
SCALE 2:1	DATE 8/29/2016	DR MW	DWG T311101	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED