



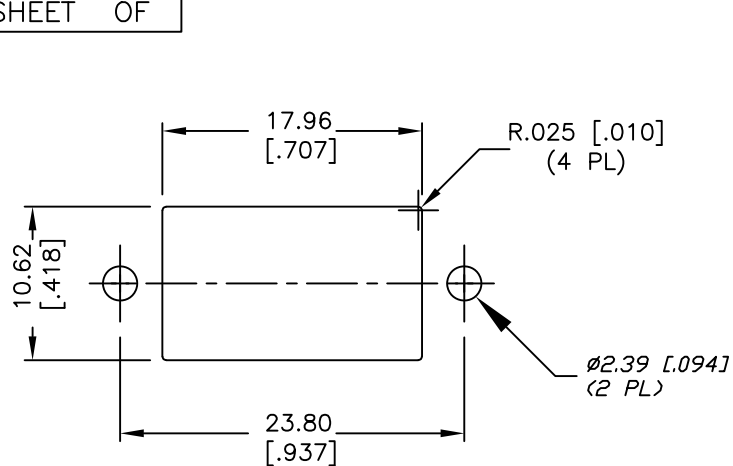

RECOMMENDED PANEL MOUNTING


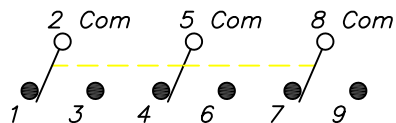


CIRCUIT: 3PDT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	NO	NC
2-3,5-6,8-9	OPEN	2-1,3-4,6-7



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4;
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- CONTACT RATING: 5A @120VAC or 28VDC;
2A @250VAC
- FIXED TERM/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE.
- ELECTRICAL LIFE:
50,000 make-and-break cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1,000 V RMS @sea level
- OPERATION TEMP.: -30°C to +85°C

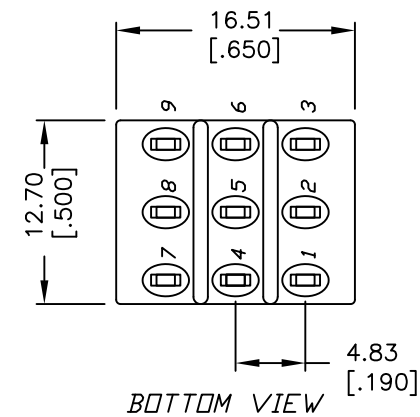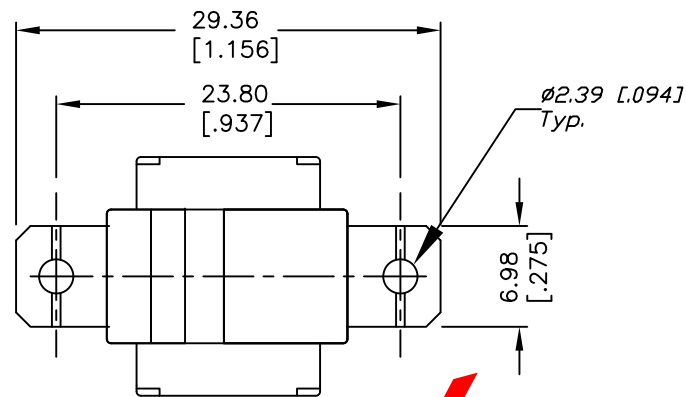

BOTTOM VIEW

CHECK
AVAILABILITY
November 2022
ECO-101394

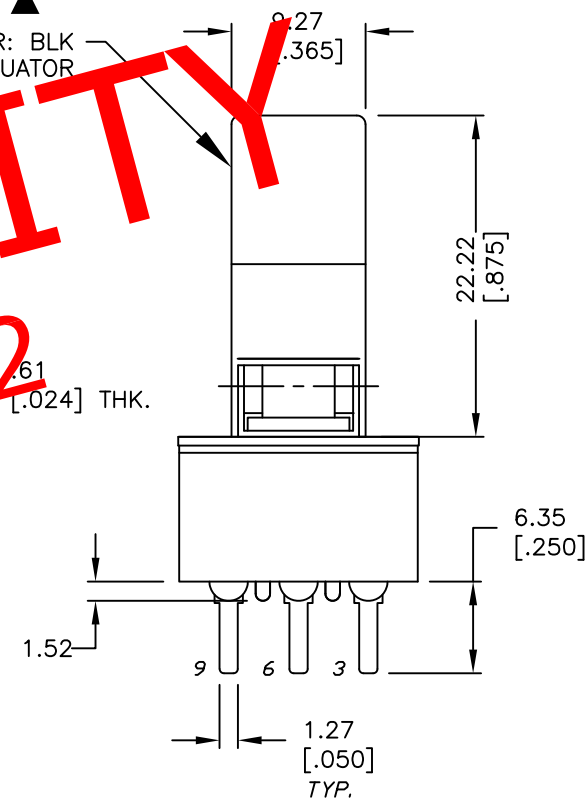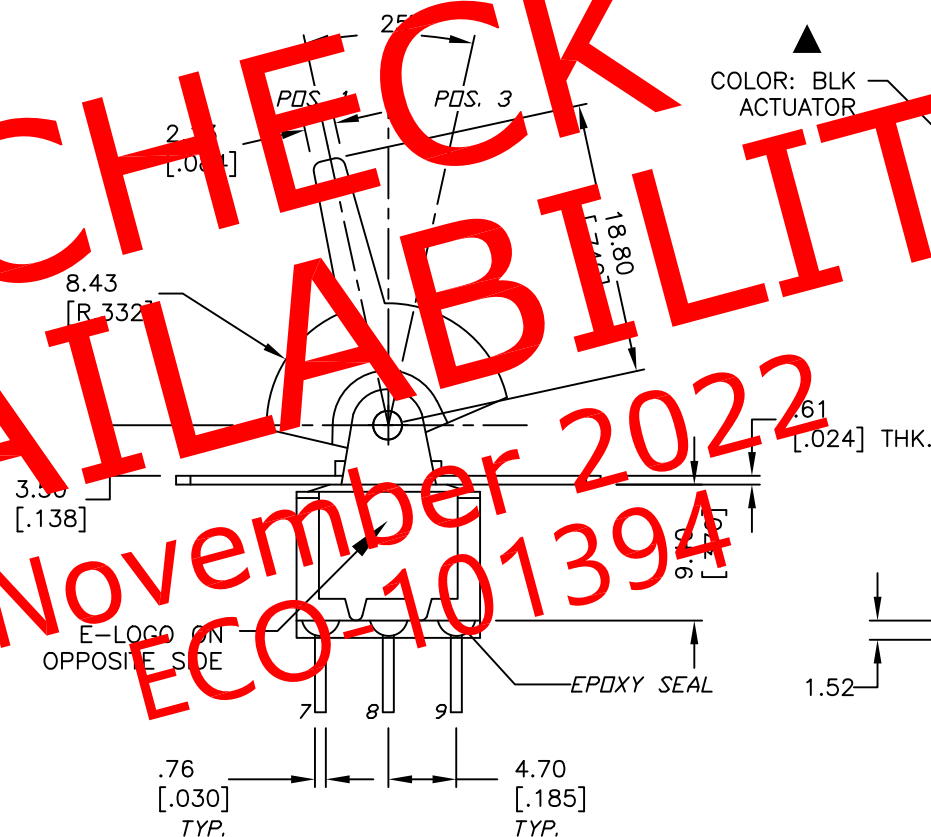**E-SWITCH®**

TITLE

300 3P2 R2 (BLK) M2 Q E

SCALE

2:1

DATE

4/15/02

DR

CJB

DWG

T333004

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	12067	RELEASED FOR PRODUCTION	4/15/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD