



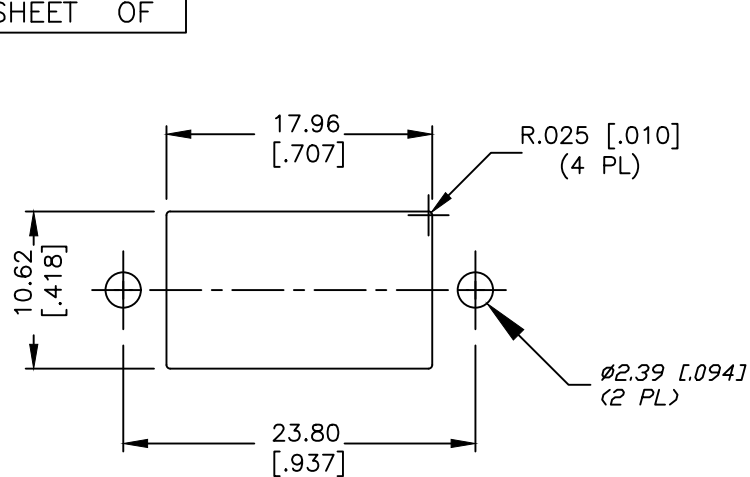

RECOMMENDED PANEL MOUNTING


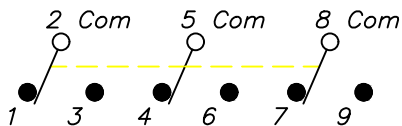


CIRCUIT: 3PDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3,5-6,8-9	OPEN	2-1,5-4,8-7



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5A @120VAC or 28VDC;
2A @250VAC
5. FIXED TERM/MOVING CONTACT:
COPPER ALLOY W/SILVER PLATE.
6. ELECTRICAL LIFE:
50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
9. OPERATION TEMP.: -40°C to +85°C

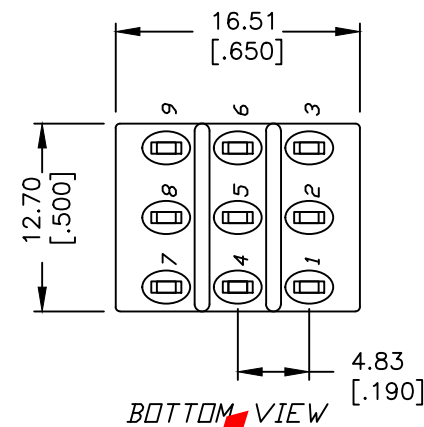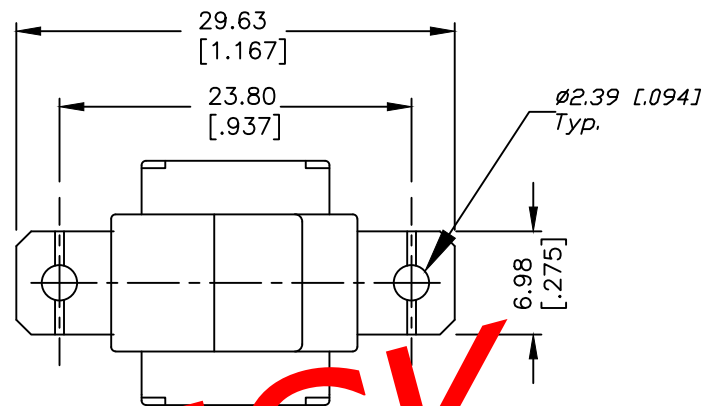

BOTTOM VIEW

CHECK
AVAILABILITY
November 2022
ECO-101394

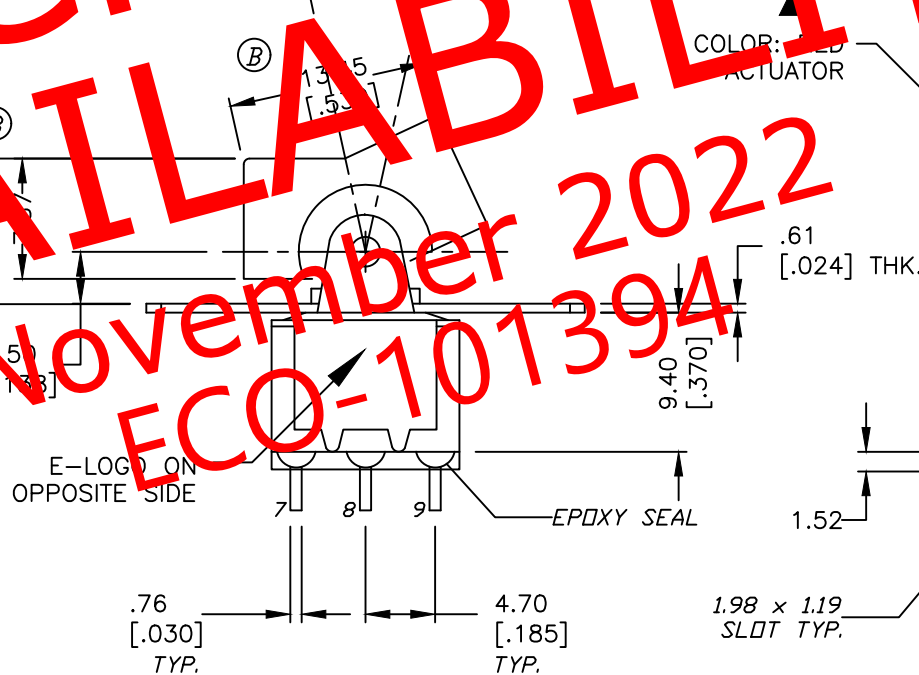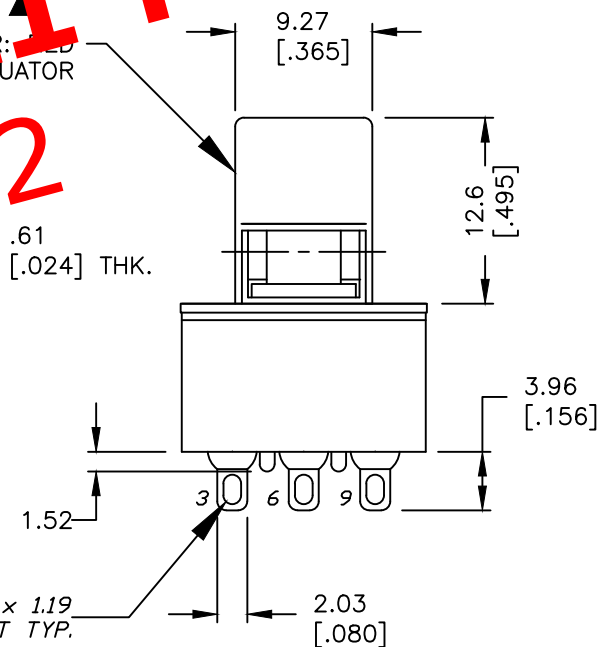COLOR: RED
ACTUATOR**E-SWITCH®**

TITLE

300 3P3 R1 (RED) M1 Q E

SCALE

2:1

DATE

4/9/02

DR

CJB

DWG

T333003

REV

B

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED