


RECOMMENDED PANEL MOUNTING
1.19mm TO 3.18mm THK


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6, 8-9, 11-12	N/A	2-1, 5-4, 8-7, 11-10

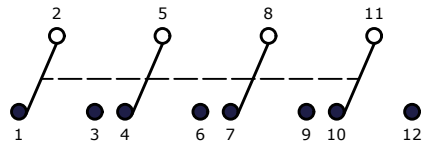


CIRCUIT: 4PDT

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD
- RATING: 0.4 VA @ 20V MAX AC OR DC
- ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -40°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.

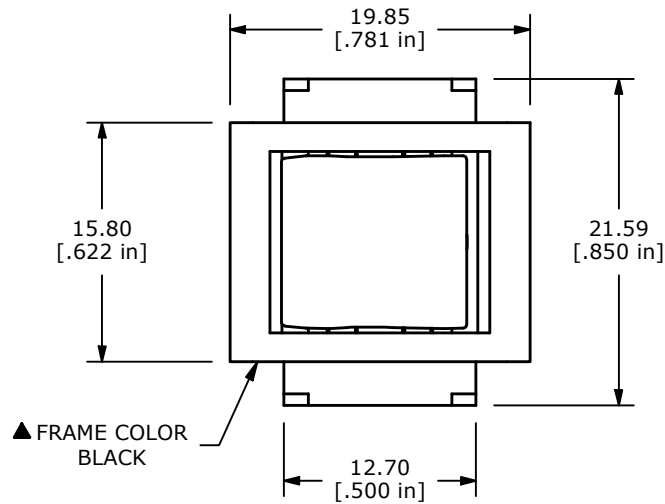



▲ FRAME COLOR
BLACK

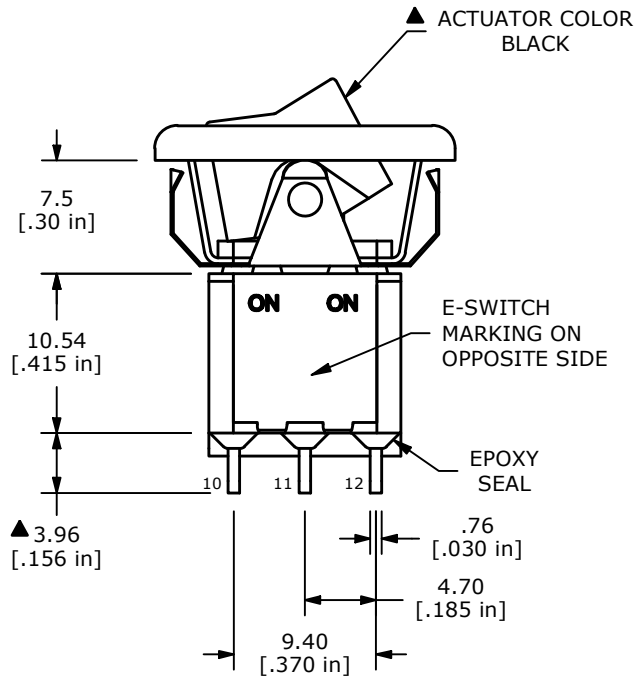

▲ ACTUATOR COLOR
BLACK

E-SWITCH
MARKING ON
OPPOSITE SIDE

EPOXY
SEAL

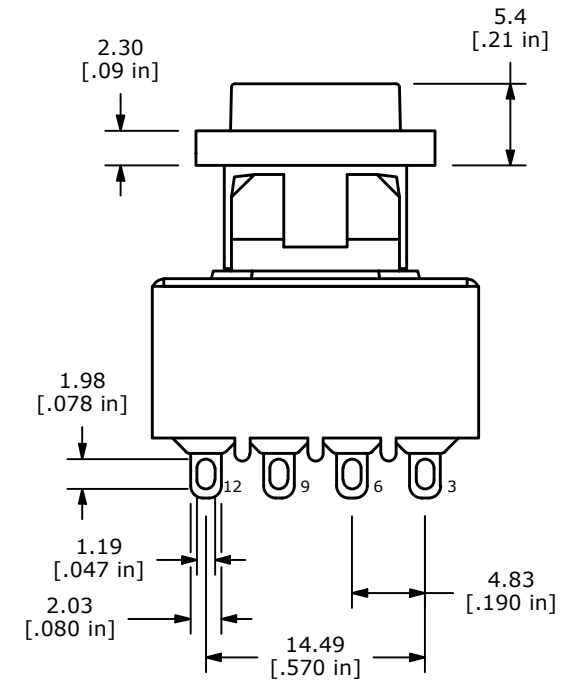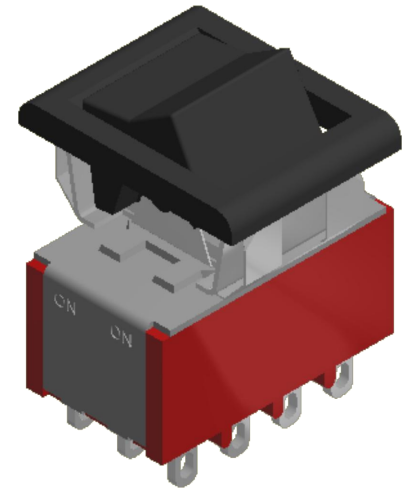

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-103425	ELECTRIC LIFE 6,000 WAS 50,000	05/14/25	JS	TITLE 3004P1R6BLKM1REBLK				000025311
B	ECO-103414	UPDATE AND REDRAWN	05/12/25	JS					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 5/6/2025	DR JS	DWG T346007	REV C