



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	(ON)
2-3, 5-6, 8-9, 11-12	OPEN	2-1, 5-4, 8-7, 11-10



POS. 1

OPEN

POS. 2





POS. 3

4PDT 3 WAY CIRCUIT



NOTE: JUMPER PIN 3 TO 5, 9 TO 11

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: SILVER
5. RATING: 2A @250VAC, 5A @120VAC OR 28VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT
12. PACKAGE: BAG/25 PIECES PER

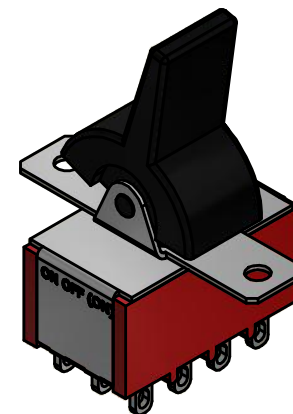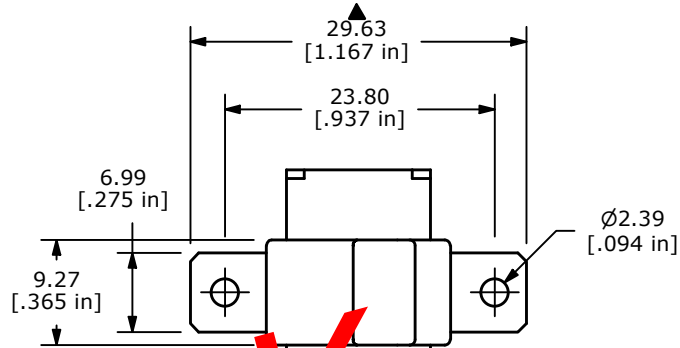

ISOMETRIC

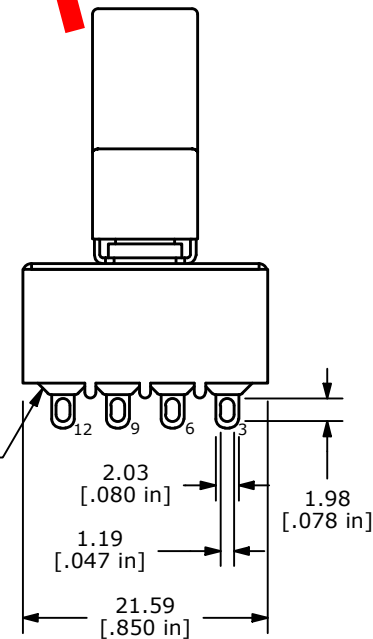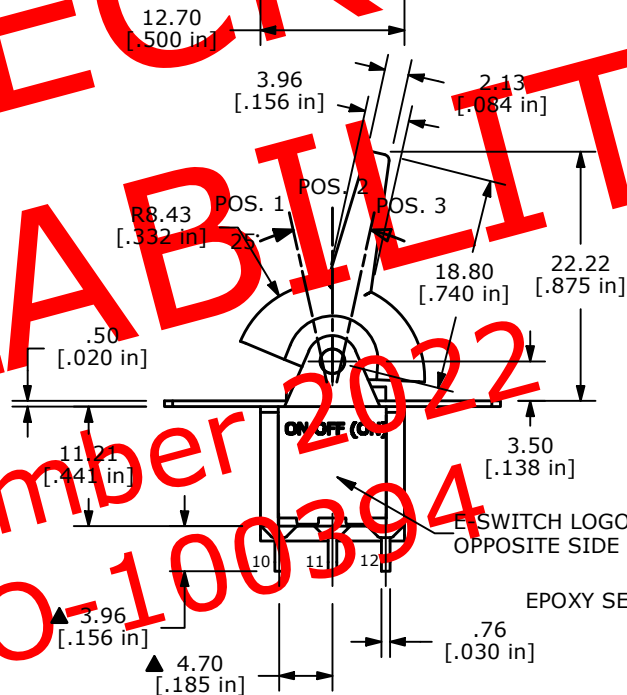

B	16960	ADDED SWITCH POS. TO DRAWING	2/5/07	TN
A	16948	RELEASED FOR PRODUCTION	2/1/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID
000025322

TITLE	3004P5R2BLKM1QE
-------	-----------------

SCALE 3:2

DATE 2/5/2007

DR	TN
----	----

DWG
T346019

REV
B