


PANEL THICKNESS	(X) DIM.
1.19 - 1.52mm	15.70 - 15.75mm
1.52 - 3.18mm	15.75 - 15.88mm





PANEL MOUNTING
(Panel Thickness 1.19 - 3.18mm)

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	N/A	2-1, 5-4



NOTE:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY.
- ▲ 4. PLATING MATERIAL: GOLD
5. RATING: 0.4 VA MAX. @ 20V MAX. AC or DC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD
7. CONTACT RESISTANCE: 10m Ω MAX INITIAL @ 2-4VDC
8. INSULATION RESISTANCE: 1,000 M Ω MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

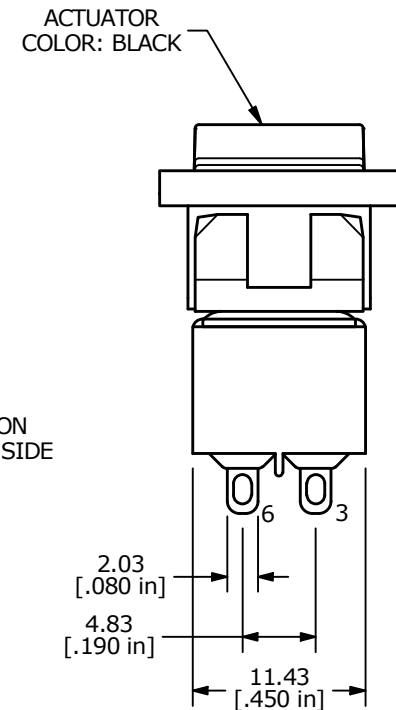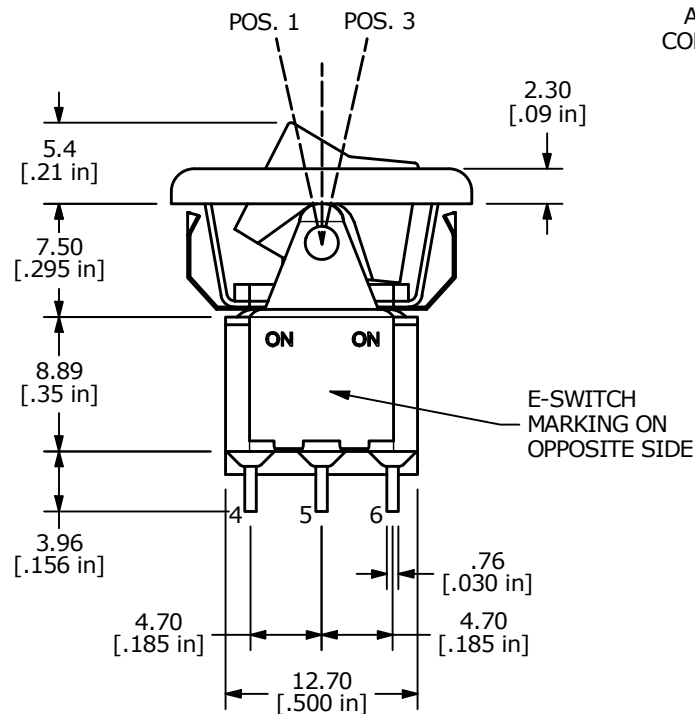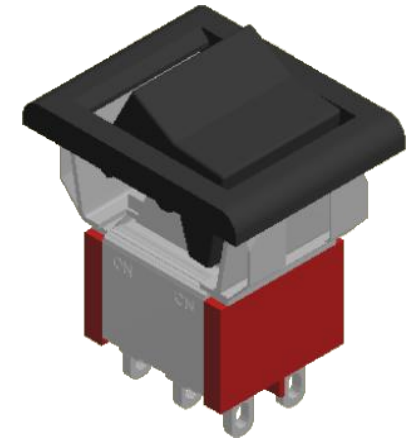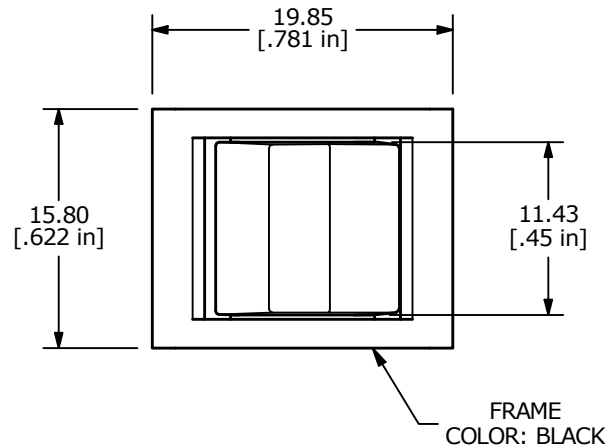

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100645	note 4 to Gold	12/28/21	MW	TITLE 300DP1R6BLKM1REBLK				000025191
					SCALE	DATE	DR	DWG	REV
					2:1	1/12/2004	AR	T321032	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED