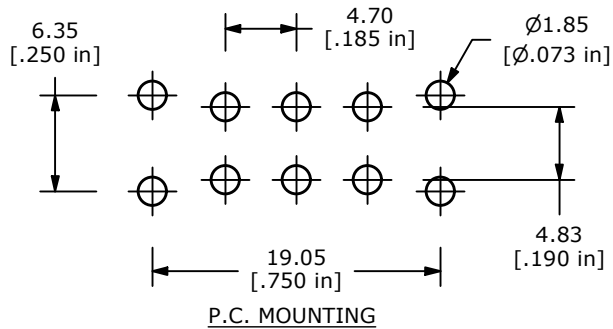





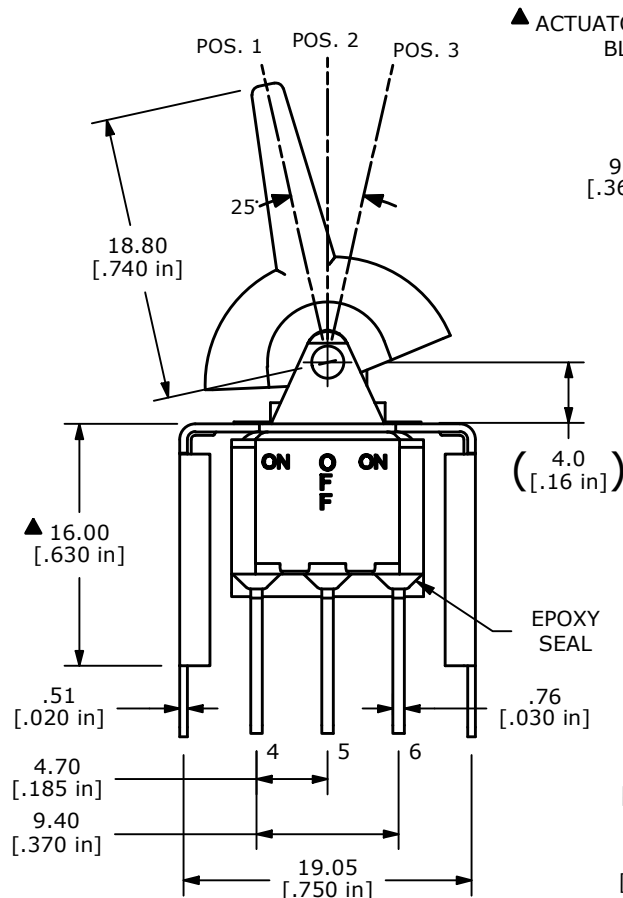
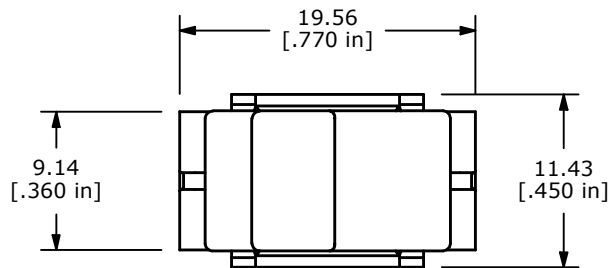
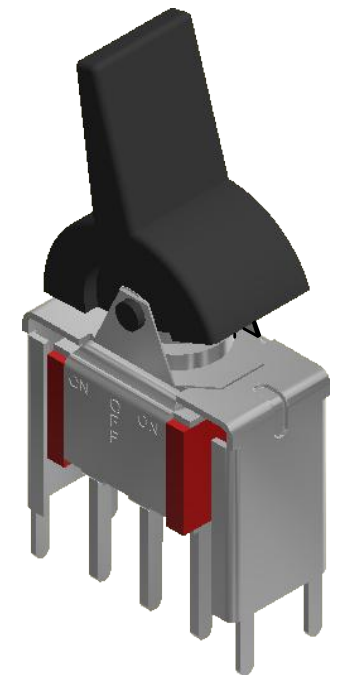
| ▲ SWITCH FUNCTION |        |          |
|-------------------|--------|----------|
| POS. 1            | POS. 2 | POS. 3   |
|                   |        |          |
| ON                | OFF    | ON       |
| 2-3, 5-6          | OPEN   | 1-2, 4-5 |



CIRCUIT: DPDT

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @250VAC  
5 AMPS @120VAC OR 28VDC
6. CONTACT RESISTANCE: 10 Milli-OHMS MAX.
7. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

▲ ACTUATOR COLOR:  
BLACK9.27  
[.365 in]E-SWITCH  
MARKING11.43  
[.450 in]▲ 4.70  
[.185 in]4.83  
[.190 in]6.35  
[.250 in]1.27  
[.050 in]

| REV | ECO NO     | DESCRIPTION                                | DATE     | BY |
|-----|------------|--------------------------------------------|----------|----|
| B   | ECO-101996 | OPERATING TEMP FROM ..-30°C.. TO ..-40°C.. | 06/12/23 | MR |
|     |            |                                            |          |    |
|     |            |                                            |          |    |



E-SWITCH®

OBJECT ID  
000025229TITLE  
300DP3J2BLKVS5QESCALE  
2:1DATE  
9/22/2009DR  
BLRDWG  
T323032REV  
BTHE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED