
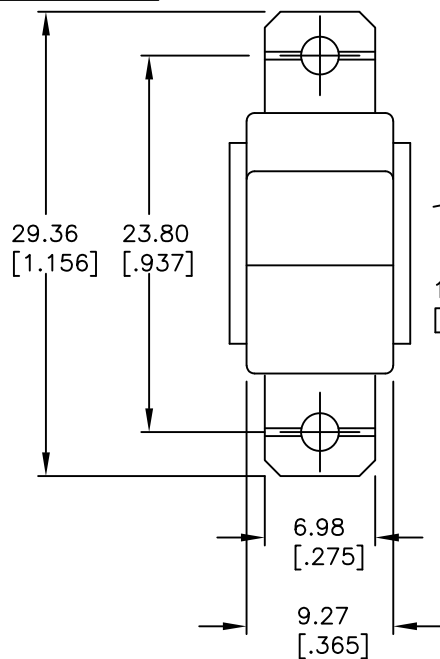
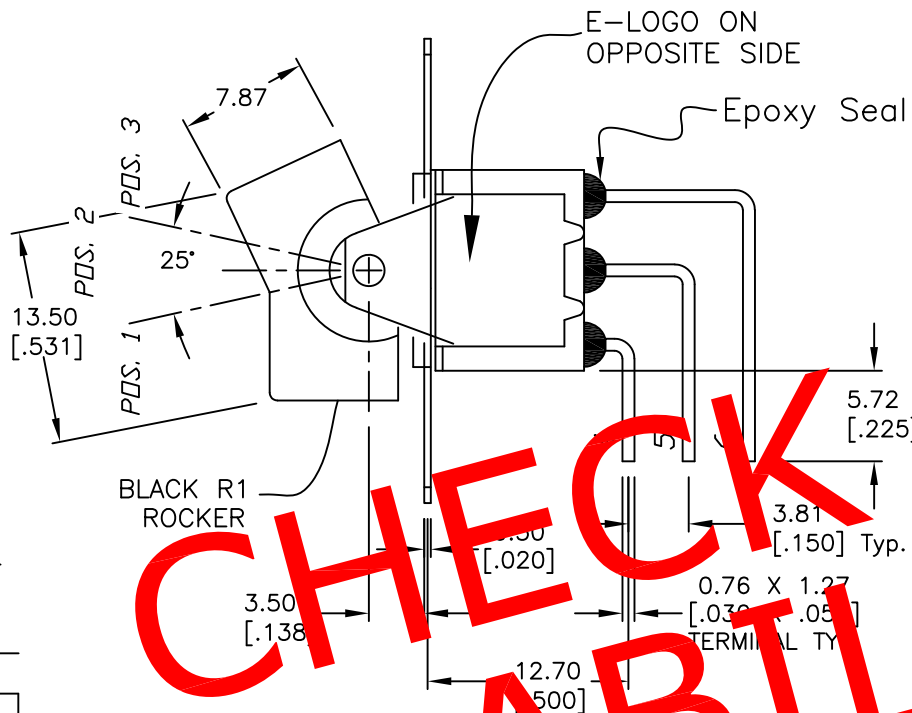




SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-3, 5-6	OPER	1, 5-

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERM. NOS. FOR REF. ONLY
- RATING: 5A @120VAC or 28VDC;
2A @250V.
- MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver plate
- CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
- ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
- INSULATION RESISTANCE: 1,000M ohm min.
- DIELECTRIC STRENGTH: 1000V RMS @sea level
- OPERATING TEMP.: -30°C to 85°C

BLACK R1
ROCKER

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT



CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

CIRCUIT: 2PDT

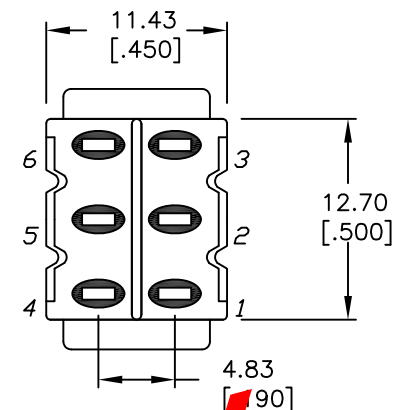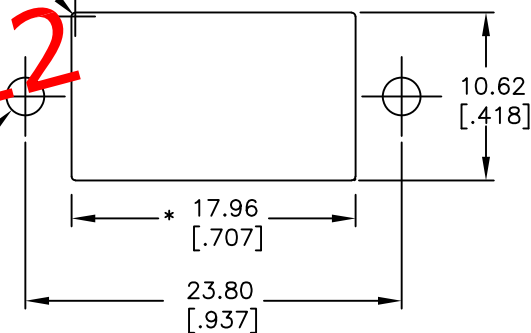RECOMMENDED P.C.B. LAYOUT
NOT TO SCALETOP VIEW
BRACKET CLIPPED
FOR CLARITY

RECOMMENDED PANEL MOUNTING

PANEL THICKNESS

- * DIMENSION IS 15.75/15.88
▲ FOR PANEL THICKNESS BETWEEN
1.52mm TO 3.18mm

E-SWITCH®

TITLE

300 DP-3 (R1 BLK) M7 QE
SPECIAL PANEL MOUNT/ANGLED TERMINATION

SCALE

2:1

DATE

7/17/02

DR

CJB

DWG

T323061

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED