
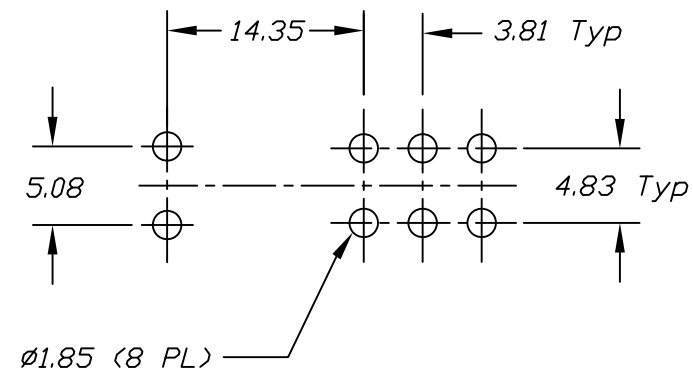
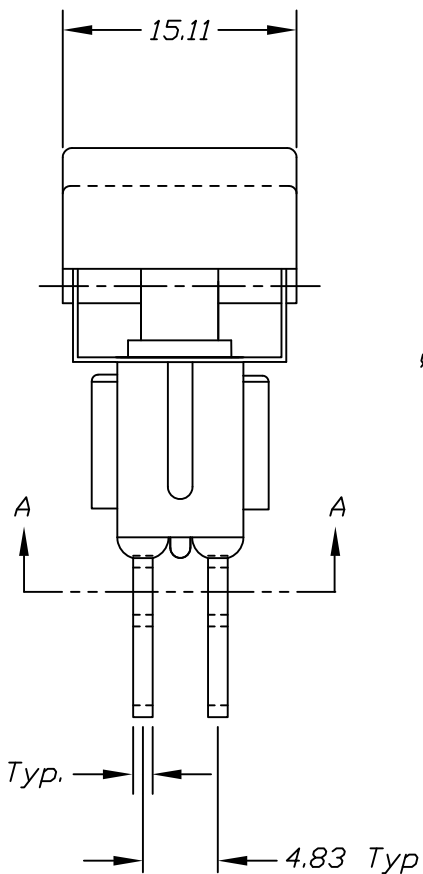
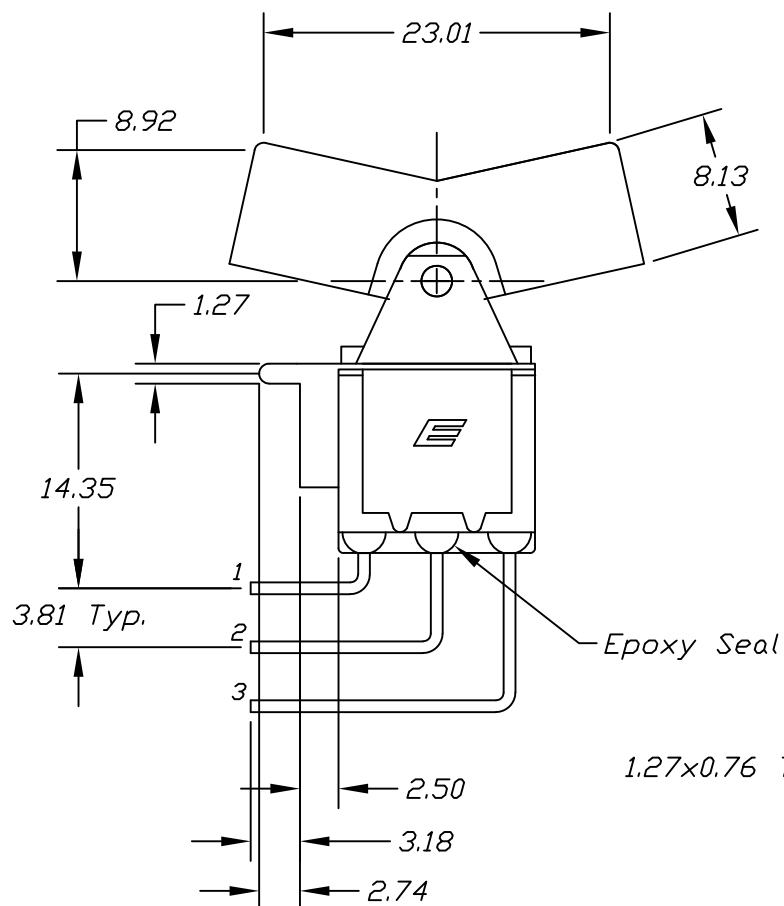





RECOMMENDED PCB LAYOUT

CIRCUIT: DPDT
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $0.00 \pm 0.40 = 0.00 \pm 0.25$
3. TERM. NOS. FOR REF ONLY
4. CONTACT RATING: 5 Amps @120VAC oR 28VDC; 2 Amps @250VAC.
5. ELECTRICAL LIFE: 50,000 MAKE AND BREAK CYCLES AT FULL LOAD
6. INSUL RESISTANCE: 1,000M-OHMS MIN
7. DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL
8. OPERATING TEMP: -30°C TO $+80^{\circ}\text{C}$



SECTION A-A

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
<ON>	OFF	<ON>
2-3, 5-6	OPEN	2-1, 5-4

() = Momentary

E-SWITCH®

TITLE

300 DP4 J3 M7 Q E

SCALE

2:1

DATE

10/16/00

DR

PML

DWG

T324007

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	11014	RELEASED FOR PRODUCTION	10/16/00	PML
REV.	ECN No.	DESCRIPTION	DATE	CHKD