


PANEL THICKNESS	(X) DIM.
1.19 - 1.52mm	15.70 - 15.75mm
1.52 - 3.18mm	15.75 - 15.88mm

PANEL MOUNTING
(Panel Thickness 1.19 - 3.18mm)


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	(ON)
2-3, 5-6	OPEN	2-1, 5-4

(ON) = MOMENTARY




NOTE:


1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY.
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2A @ 250VAC
5A @ 120VAC OR 28VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD
7. CONTACT RESISTANCE: 10m Ω MAX INITIAL @ 2-4VDC
8. INSULATION RESISTANCE: 1,000 M Ω MIN.
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

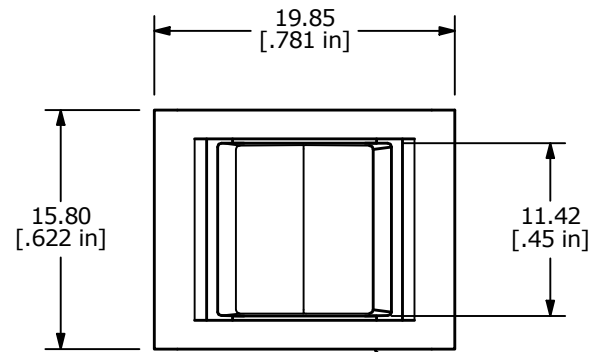


FRAME
COLOR: BLACK

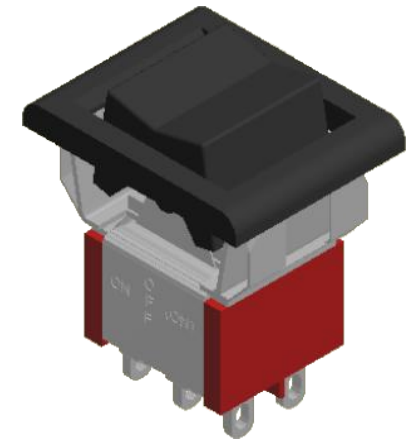

ACTUATOR
COLOR: BLACK

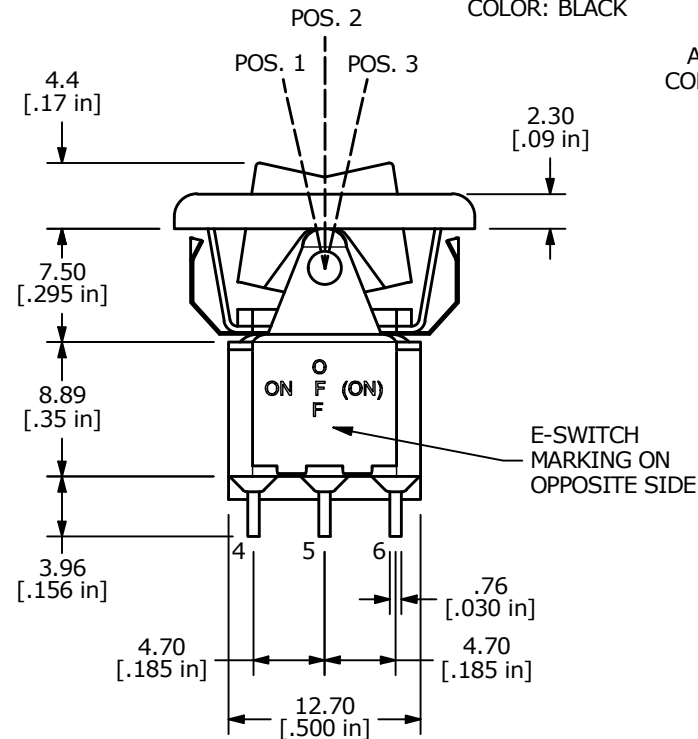

E-SWITCH
MARKING ON
OPPOSITE SIDE

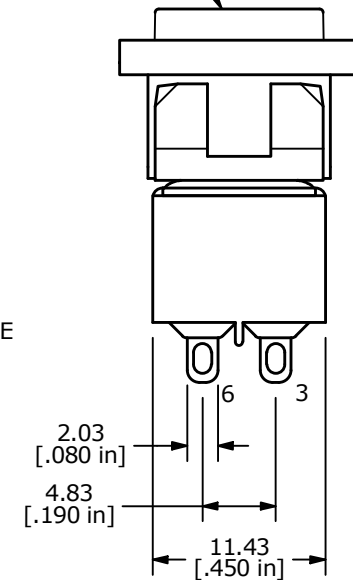

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®			OBJECT ID
A	ECO-101198	RELEASE	08/24/22	JS	TITLE 300DP5R6BLKM1QEBLK			100122633
					SCALE 2:1	DATE 8/23/2022	DR JS	DWG T325006
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								REV A