
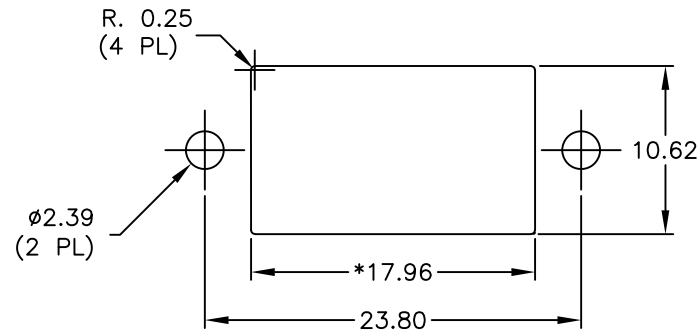
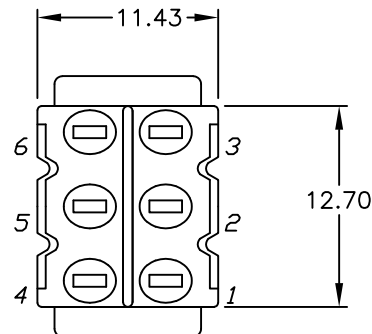


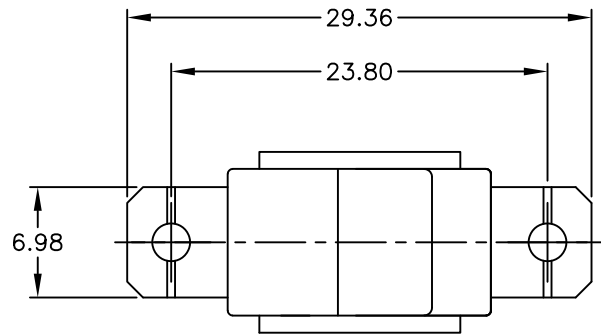

RECOMMENDED PANEL MOUNTING

*BOTTOM VIEW
BRACKET CLIPPED
FOR CLARITY*

PANEL THICKNESS

* DIMENSION IS 15.75/15.88
FOR PANEL THICKNESS BETWEEN
1.52mm (0.060") & 3.18mm (0.125")


SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	ON	(ON)
2-3,5-6	2,1,5-6	2-1,5-4

()=MOMENTARY

CIRCUIT: DPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

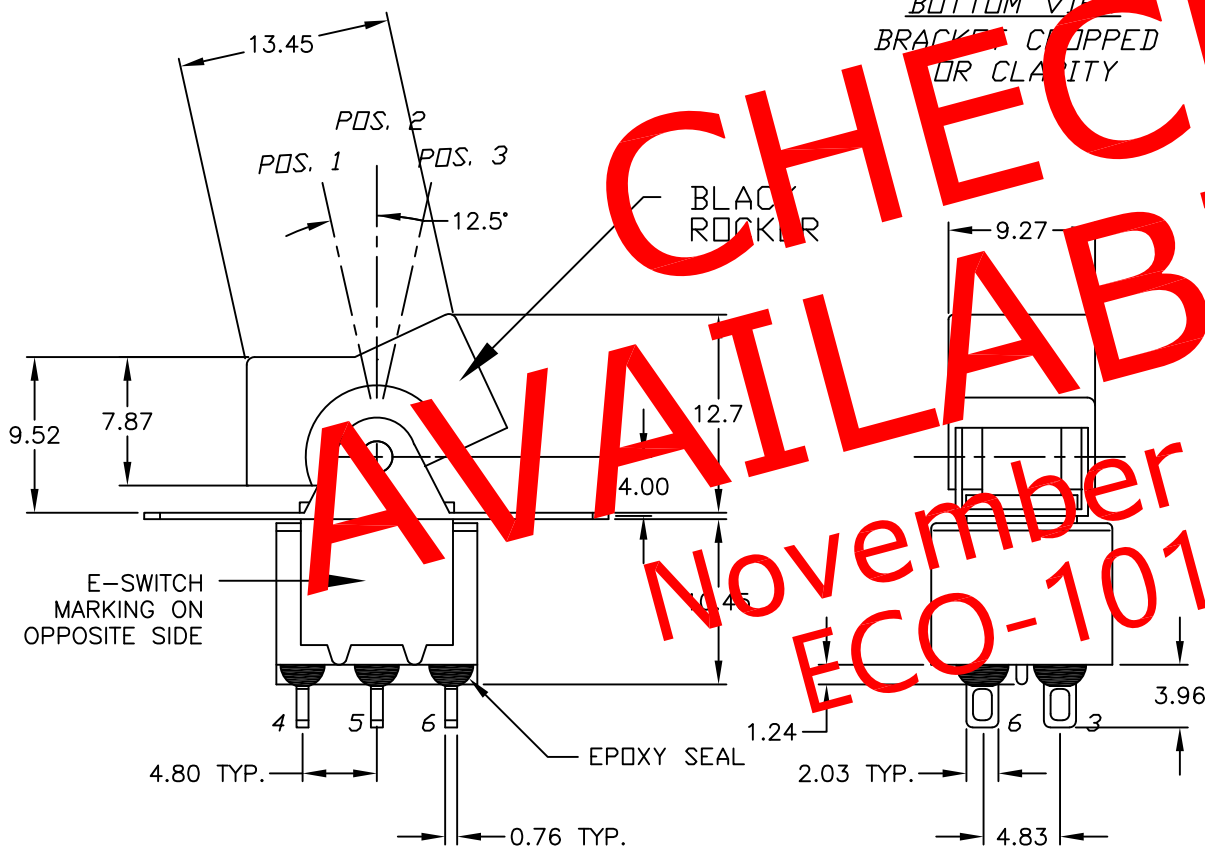

**CHECK
AVAILABILITY
November 2022
ECO-101394**

E-SWITCH®

TITLE

300 DP-8 R1 BLK M1 Q E

SCALE

2:1

DATE

4/3/02

DR

CB

DWG

T328000

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	12032	RELEASED FOR PRODUCTION	4/3/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD