



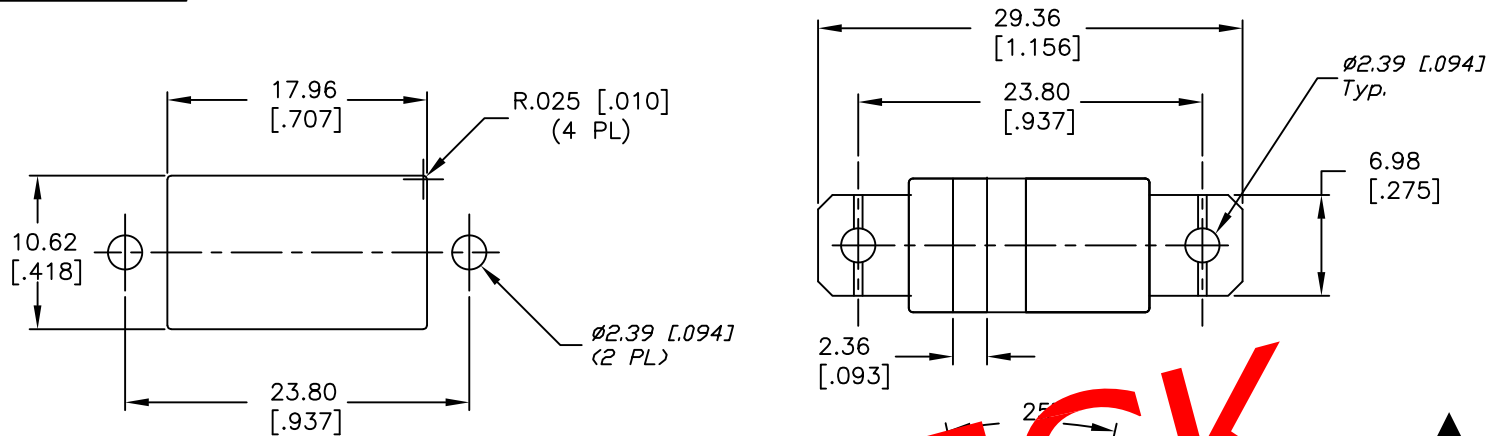

RECOMMENDED PANEL MOUNTING




CIRCUIT: SPDT
~~CONTACT CONFIGURATION~~

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	ON
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 (VA) MAX. @ 20V MAX. (AC or DC)
5. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000M ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
8. OPERATION TEMP.: -30°C to 85°C

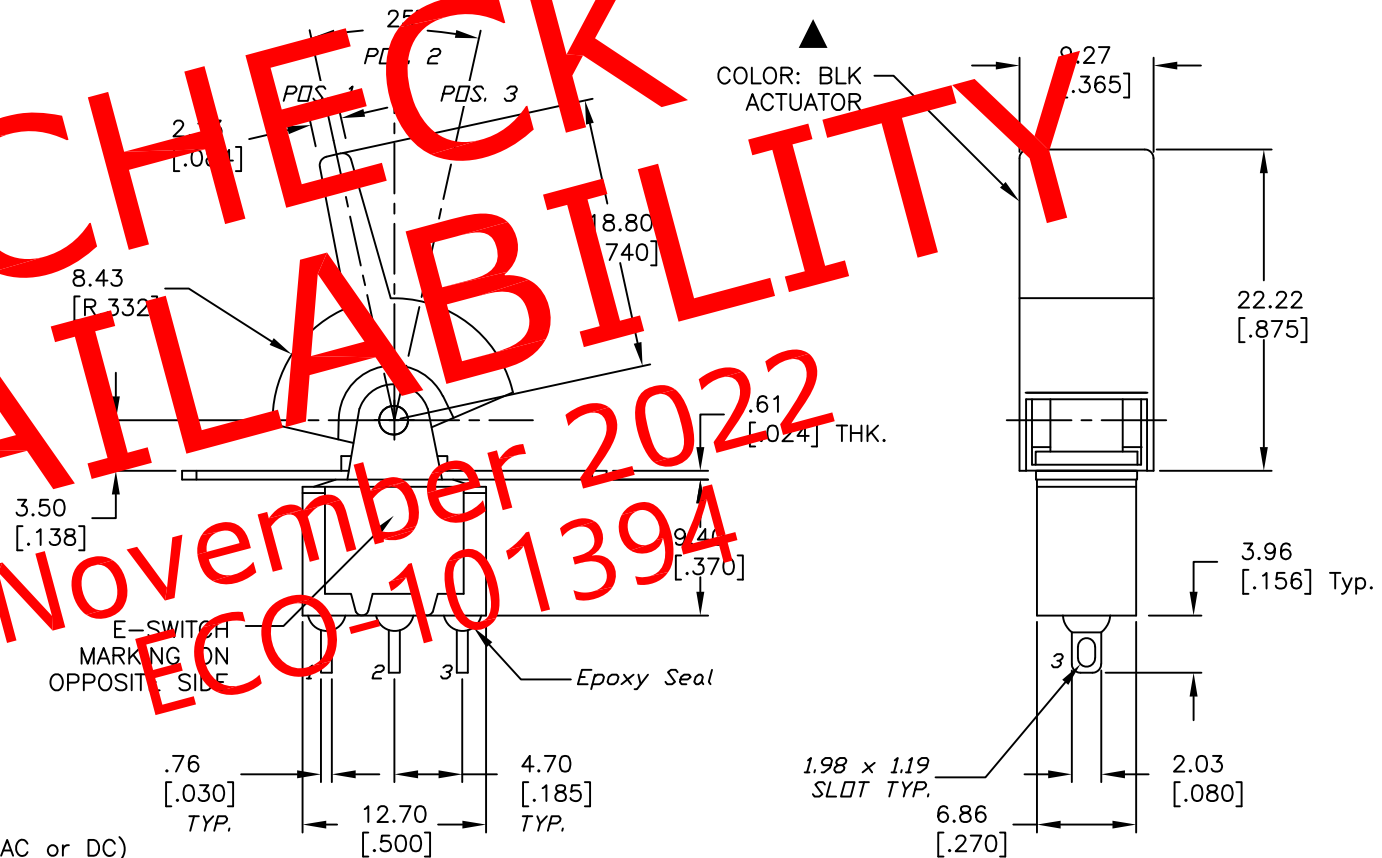

A	11493	RELEASED FOR PRODUCTION	5/08/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®				
TITLE <i>300 SP-3 R2 (BLK) M1 R E</i>				
SCALE <i>2:1</i>	DATE <i>5/08/01</i>	DR <i>CJB</i>	DWG <i>T311049</i>	REV <i>A</i>