

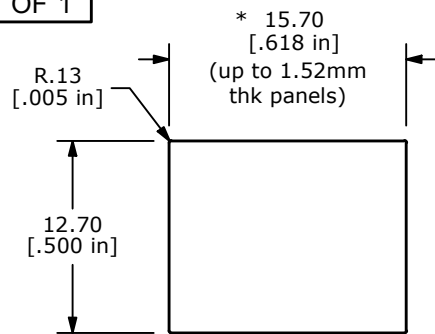




* 15.75/15.88mm (.62/.625") for
1.52/3.18mm (.060/.125") thk. panels




RECOMMENDED PANEL MOUNTING

PANEL THICKNESS: 1.19 [.047 in] - 3.18 [.125 in]

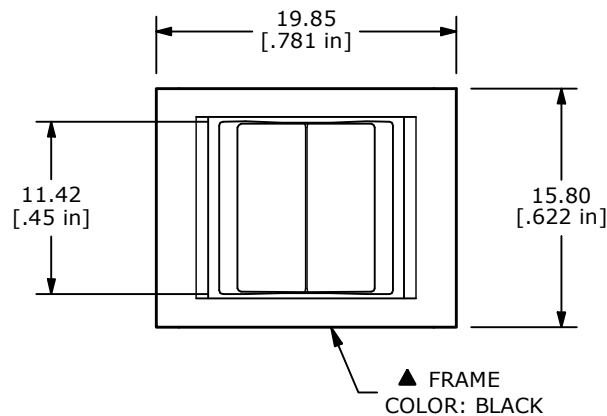

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
(ON)	OFF	(ON)
2-3	OPEN	2-1

() = MOMENTARY

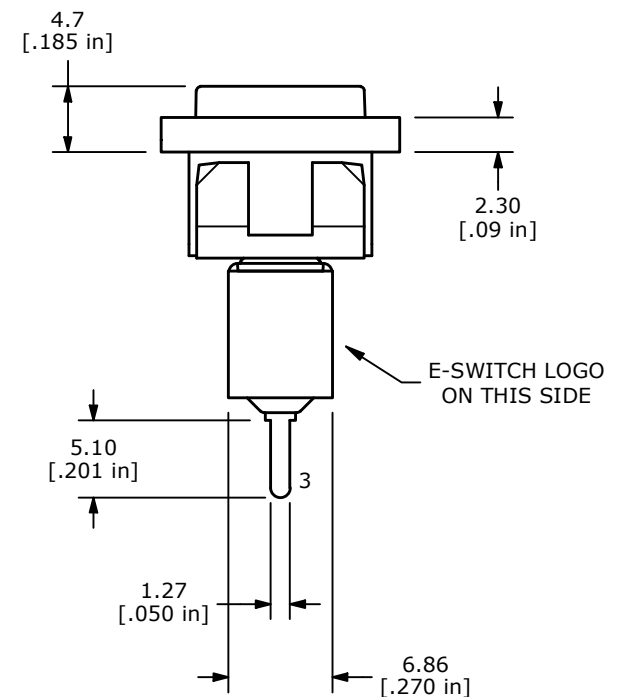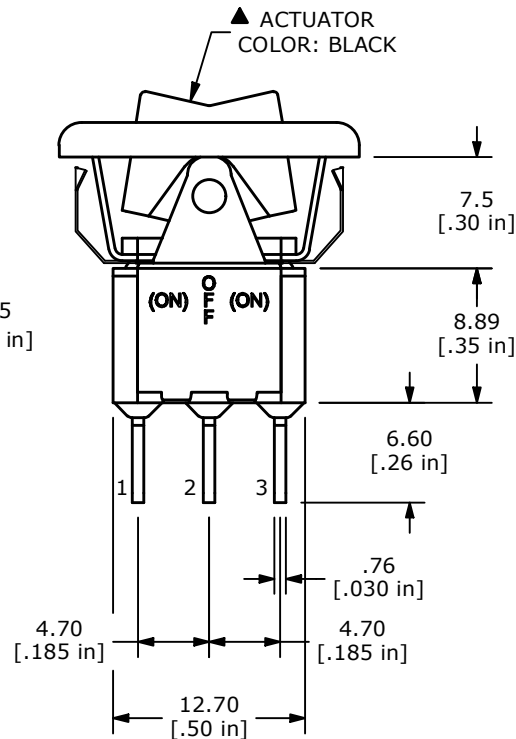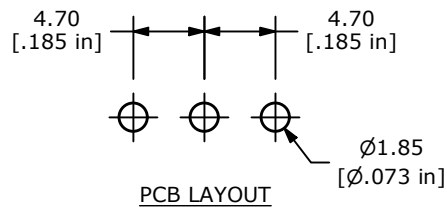

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: RATING: 2 AMPS @250VAC
5 AMPS @120VAC or 28VDC
6. CONTACT RESISTANCE: 10 m Ω max. initial @ 2-4 VDC
7. ELECTRIC LIFE: 40,000 make-and-break cycles
at full load.
8. INSULATION RESISTANCE: 1,000 M Ω min.
9. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.



E-SWITCH®

A	24291	NEW RELEASE	5/8/20	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 300SP4R6BLKM2QEBLK

SCALE 2:1	DATE 5/6/2020	DR MW	DWG T314072	REV A
--------------	------------------	----------	----------------	----------