
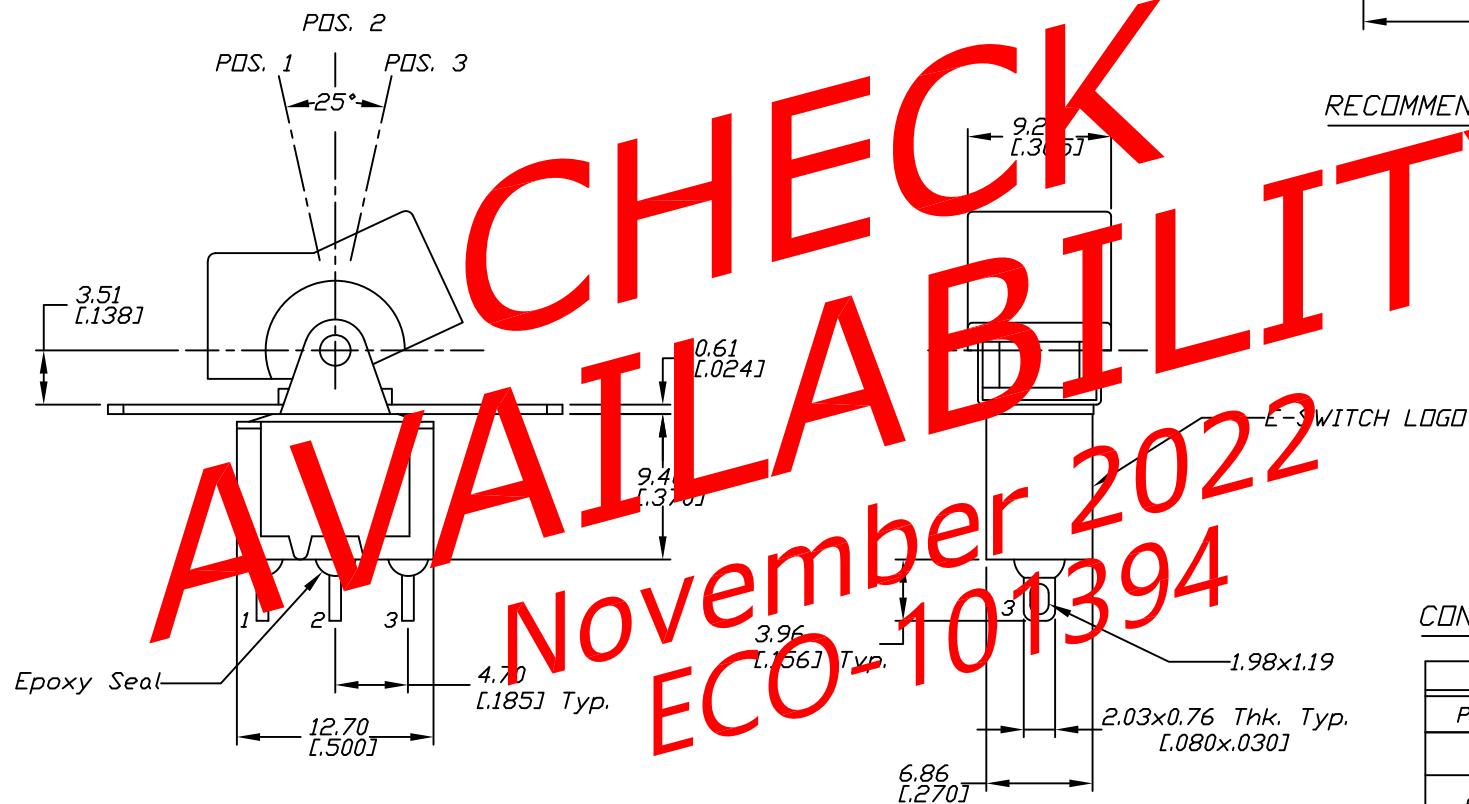
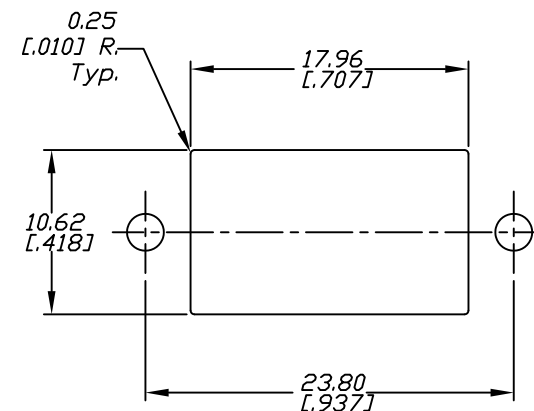
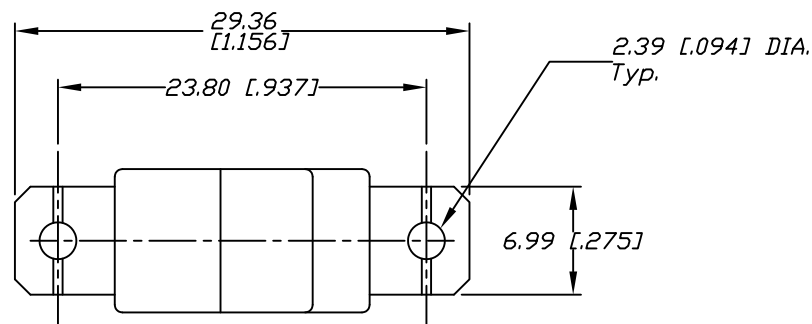




RECOMMEND PANEL MOUNTING

CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	(ON)
2-3	OPEN	2-1

()=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0 $\pm$ 0.4
0.00 $\pm$ 0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 5 Amps @120VAC or 28VDC;
2 Amps @250VAC.

E-SWITCH®

TITLE

300SP5R1BLKM1QE

SCALE

2:1

DATE

1/11/99

DR

MM

DWG

T315006

REV

B

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

B	14972	REVISED "E-SWITCH" LOGO	6/2/05	JB
A	10077	RELEASED FOR PRODUCTION		
REV.	ECN No.	DESCRIPTION	DATE	CHKD