


SPECIFICATIONS

FUNCTION:
1P1T OFF-(ON) + 1P1T ON-(OFF)

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):
18A 125VAC [CURUS]
12A 250VAC [CURUS]



OPERATING FORCE:
3.0kgf±0.5kgf
ELECTRICAL LIFE:
6,000 Cycles [CURUS]

APPROVALS:




0.732 [18.6]

0.827 [21.0]
TRAVEL: 0.236 [6.0]

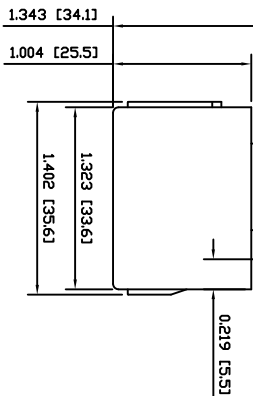




POSITION 1 —
POSITION 2 —

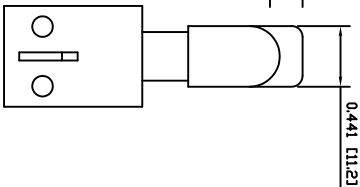

COLORS

BODY: White
ACTUATOR: Black
LOCK: Black

SCHEMATIC



HY15-6Y7-211-0000

INCHES [MILLIMETERS]
GENERAL TOLERANCES ±0.020 [±0.5] / ±.1
SCALE DRAWING NOT TO SCALE

DRAWING NUMBER 34-HY15672110000 DATE JULY 30, 2009 REVISION B

Removed IIV reference information
INITIAL RELEASE DESCRIPTION

REV.	A	09/07/10	CAB
REV.	A	09/07/10	CAB
REV.	A	09/07/10	CAB
REV.	A	09/07/10	CAB
REV.	A	09/07/10	CAB

1

2

3

4

5

6

7

8

D

C

B

A

D

C

B

A