

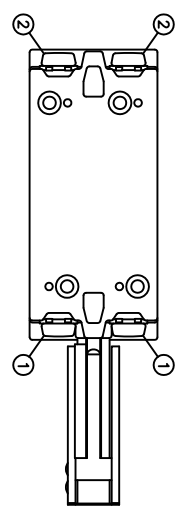




COLORS
 BODY: Black
 ACTUATOR: Black
 LOOK: None

SPECIFICATIONS
 FUNCTION: ZP11 OFF-(ON)
 RATINGS:
 24A 125VAC
 12A 250VAC
 2HP 125/250VAC
 OPERATING FORCE: 2.0kgf±0.5kgf at Highest Point
 ELECTRICAL LIFE: 50,000 Cycles
 TEMPERATURE: Operating: 0°C to 55°C
 APPROVALS:
ROHS
 COMPLIANT

MATERIALS
 LOWER BODY: Phenolic (PF), UL94 V-0
 UPPER BODY: Polyamide 6/6 (PA66), UL94 V-0
 ACTUATOR: Polyamide 6/6 (PA66), UL94 V-0
 ACTUATOR RIVET: Copper
 ACTUATOR LINK: Polyamide 6/6 (PA66), UL94 V-0
 PLATE: Polyamide 6/6 (PA66), UL94 V-0
 SEAL: Nitrile Butuhine Rubber (NBR), UL94 V-0
 CONTACT HOLDER: Polyamide 6/6 (PA66), UL94 V-0
 MAIN SPRING: Steel
 SLIDERS: Steel
 MOBILE CONTACTS: Silver Plated Brass
 CONTACT SPRINGS: Steel
 CONTACTS: Silver Alloy Clad Copper
 TERMINALS: Silver Polished Brass
 TERMINAL SCREWS: Steel
 TERMINAL HARDWARE: Steel
 GREASE: Silicone Based Grease

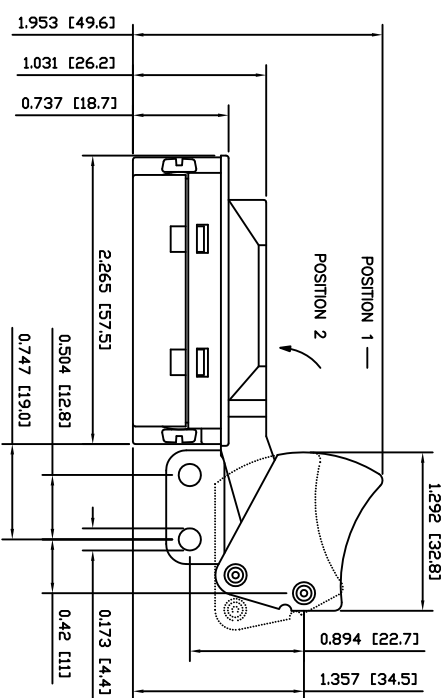

HY38-6B8-021-000

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED	A	INITIAL RELEASE DESCRIPTION	21298	11/26/13	EPB	SCALE	PROJECTION	TED NUMBER	DATE	REVISION
	REV.		FOR	DATE	DRAWN BY	INCHES [MILLIMETERS]		34-HY3868B021000	NOVEMBER 8, 2013	A
						±0.012 [±0.3] / ±.1*				