

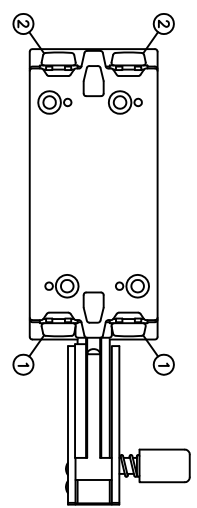



COLORS
 BODY: Black
 ACTUATOR: Black
 LOCK: Black

SPECIFICATIONS
 FUNCTION: 2P1T OFF-(ON)
 RATINGS:
 2A 125VAC
 12A 250VAC
 2HP 125/250VAC
 OPERATING FORCE: 2.0kgf±0.5kgf at Highest Point
 ELECTRICAL LIFE: 50,000 Cycles
 TEMPERATURE: Operating: -20°C to 65°C

APPROVALS:
RoHS
 COMPLIANT

MATERIALS
 LOWER BODY: Phenolic (FR), UL94 V-0
 UPPER BODY: Polyamide 6/6 (PA66), UL94 V-0
 ACTUATOR: Polyamide 6/6 (PA66), UL94 V-0
 ACTUATOR RIVET: Copper
 LOCK BUTTON: Polyamide 6/6 (PA66), UL94 V-0
 LOCK SPRING: Steel
 LOCK POST: Steel
 ACTUATOR LINK: Polyamide 6/6 (PA66), UL94 V-0
 PLATE: Polyamide 6/6 (PA66), UL94 V-0
 SEAL: Nitrile Butadiene Rubber (NBR), UL94 V-0
 CONTACT HOLDER: Polyamide 6/6 (PA66), UL94 V-0
 MAIN SPRING: Steel
 SLIDERS: Steel
 MOBILE CONTACTS: Silver Plated Brass
 CONTACT SPRINGS: Steel
 CONTACTS: Silver Alloy Clad Copper
 TERMINALS: Silver Plated Brass
 TERMINAL SCREWS: Steel
 TERMINAL HARDWARE: Steel
 GREASE: Silicone Based Grease

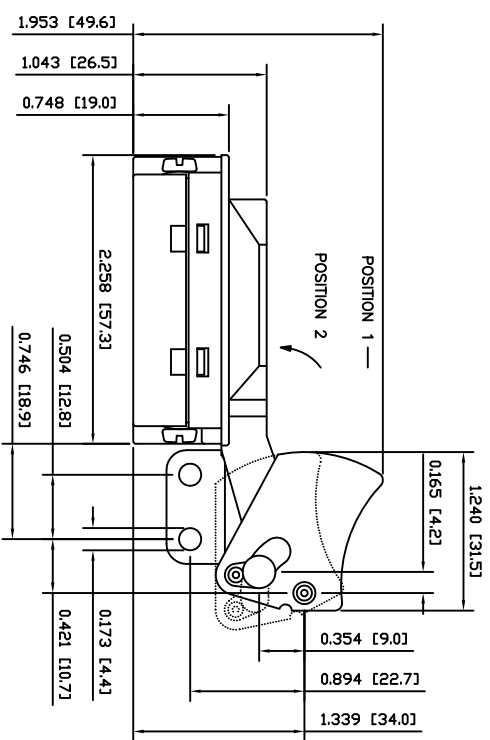

E SWITCH

LAMB INDUSTRIES

HY38-6E8-021-211

8	7	6	5	4	3	2	1
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED				INITIAL RELEASE DESCRIPTION	21298 FOR DATE	11/8/13	EPB DRAWN BY
DIMENSIONS: INCHES [MILLIMETERS]				GENERAL TOLERANCES: ±0.012 [±0.3] / ±1'	SCALE: DRAWING NOT TO SCALE	PROJECTION: 1st Angle	TITLE NUMBER: 34-HY386EB021211
REV. A				21298 FOR DATE	11/8/13	EPB DRAWN BY	NOVEMBER 8, 2013
REVISION A							