
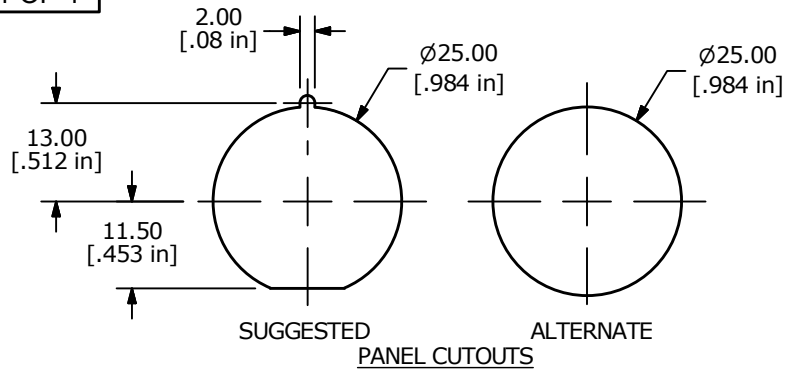

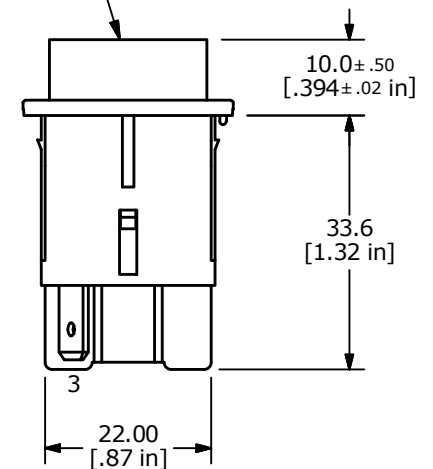


▲ SWITCH FUNCTION

| POS. 1 | POS. 2 |
|--------|--------|
|        |        |
| OFF    | ON     |
| OPEN   | 1-3, 2 |

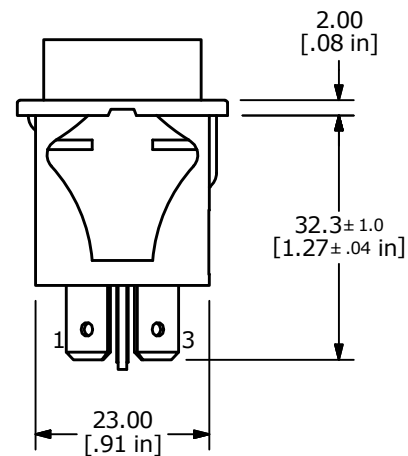


CIRCUIT: SPST

▲ FULL ILLUMINATED  
GREEN LENS

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = 0.4  
X.XX = 0.25
- TERMINAL NO'S FOR REFERENCE ONLY.
- CONTACT RATINGS:
  - 16A 125VAC [UL, cUL]
  - 3/4HP 250VAC [UL, cUL]
  - 16(6)A 250V~ 1E4 T125 [VDE]
  - 10(4)A 250V~ 5E4 T125 [VDE]
- CONTACT RESISTANCE: 35mΩ MAX. INITIAL @ 50VAC
- INSULATION RESISTANCE: 100MΩ @ 500VDC
- DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE
- ELERTICAL LIFE: 6,000 CYCLES [UR, cUR]  
10,000 CYCLES [VDE]  
50,000 CYCLES [VDE]
- ▲ DENOTE CRITICAL PARAMETER
- 2011/65/EU (ROHS) COMPLIANT
- ILLUMINATION VOLTAGE: 12V
- LENS COLOR: GREEN

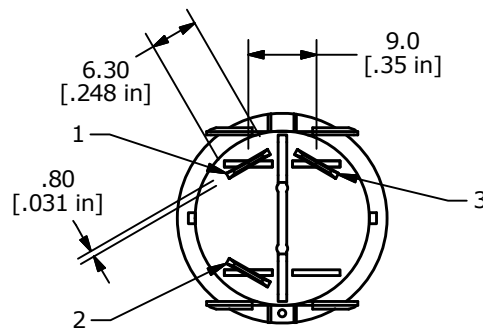

E-SWITCH®

|     |        |                       |         |    |
|-----|--------|-----------------------|---------|----|
| A   | 23419  | RELEASE TO PRODUCTION | 6/27/18 | MW |
| REV | PCR NO | DESCRIPTION           | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PR141C4000-134 (Gray Body)

SCALE 1:1

DATE 6/27/2018

DR MW

DWG 38-PR141C4000134

REV A