





| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| OFF             | (ON)   |
| OPEN            | 1-3, 2 |

(ON) = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
3. TERMINAL NO'S FOR REFERENCE ONLY.
- ▲ 4. CONTACT RATINGS:  
ANSI/UL 1054 AND CAN/CSA C22.2 NO.55(E194579)  
16A 125VAC [UR,cUR]  
1/2HP 125VAC, 3/4HP250VAC [UR,cUR]  
EN 61058-1: 2002:  
16(6)A 250V~ 1E4 T125/55 [ENEC14, SEMKO]  
10(4)A 250V~ 5E4 T125/55 [ENEC14, SEMKO]
5. CONTACT RESISTANCE: 35mΩ MAX. INITIAL @ 50VAC
6. INSULATION RESISTANCE: 100MΩ @ 500VDC
7. DIELECTRIC STRENGTH: 1500VAC FOR 1 MINUTE
8. ELERTICAL LIFE: 6,000 CYCLES [UR,cUR]  
10,000 CYCLES [VDE]  
50,000 CYCLES [VDE]
9. ▲ DENOTE CRITICAL PARAMETER
- ▲ 10. 2002/95/EC (ROHS) COMPLIANT
11. ILLUMINATION VOLTAGE: 12V

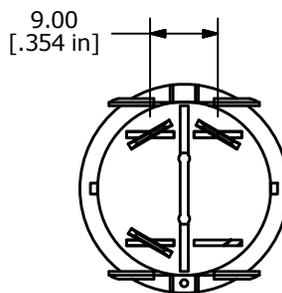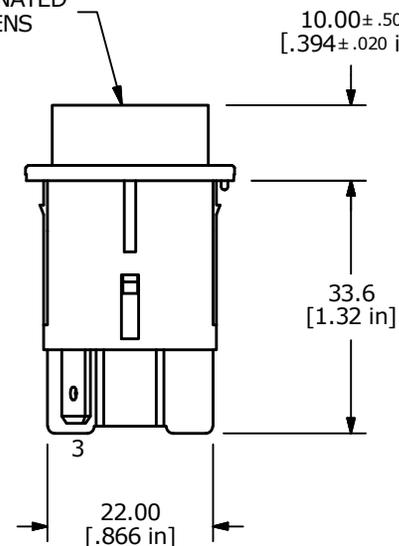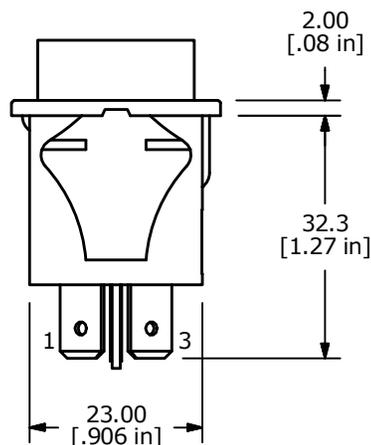

|     |        |                       |          |    |
|-----|--------|-----------------------|----------|----|
| A   | 22035  | RELEASE TO PRODUCTION | 10/30/15 | MW |
| REV | PCR NO | DESCRIPTION           | DATE     | BY |

|                      |                 |       |                      |       |
|----------------------|-----------------|-------|----------------------|-------|
| TITLE PR144C1000-134 |                 |       |                      |       |
| SCALE 1:1            | DATE 10/30/2015 | DR MW | DWG 38-PR144C1000134 | REV A |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED