


SHEET 1 OF 1

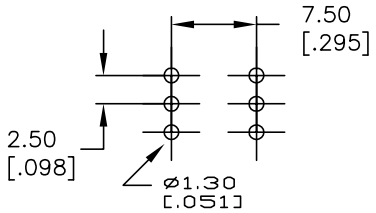


RECOMMENDED P.C.B. LAYOUT



CIRCUIT
CONTACT CONFIGURATION

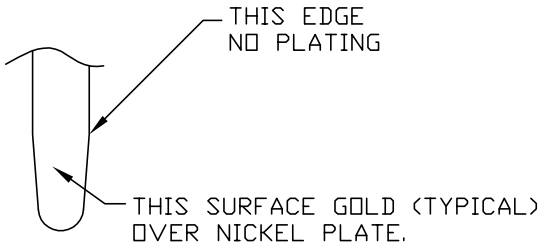

EXPLODED VIEW
TO SHOW PLATING AREAS

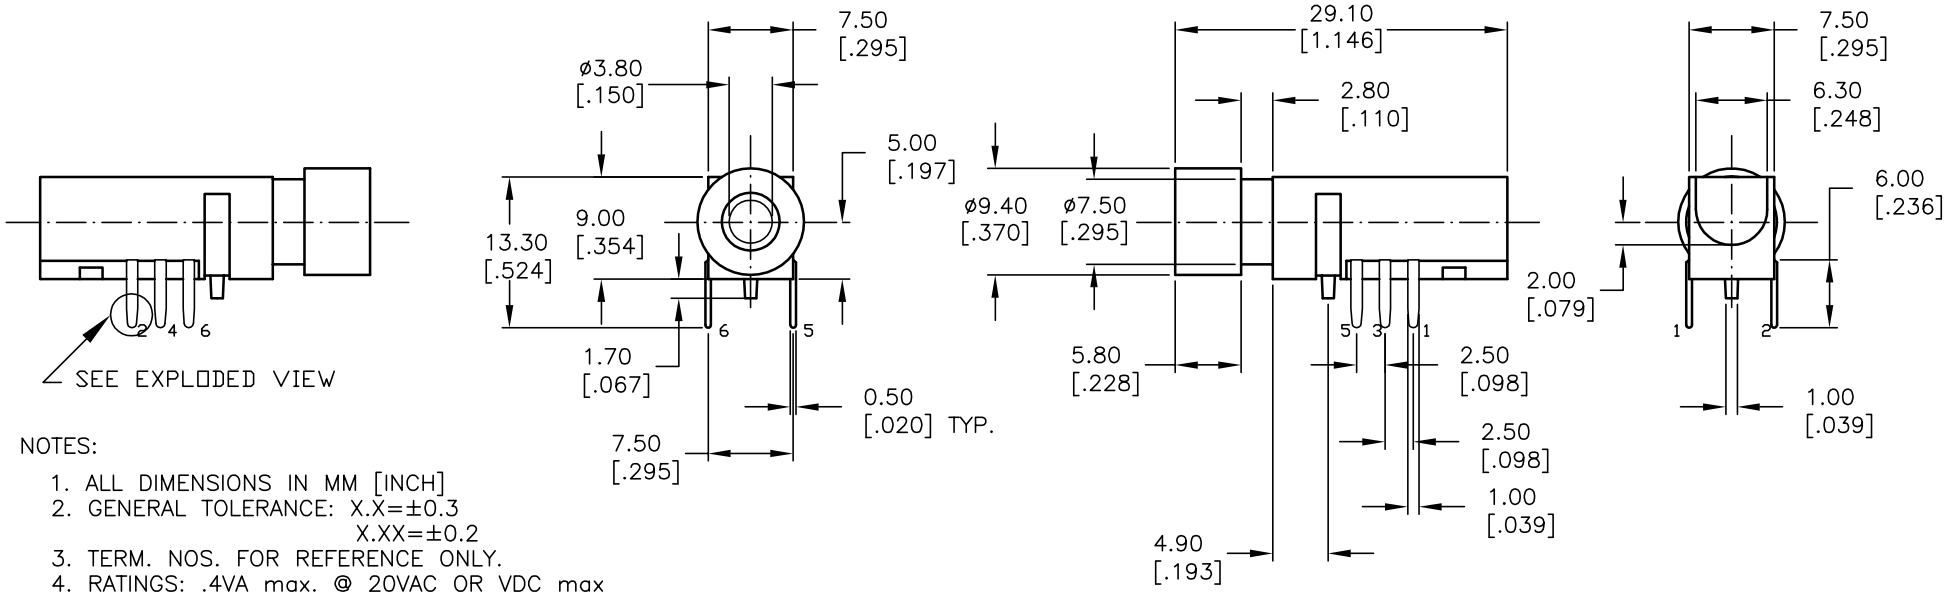

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.3
   X.XX=±0.2
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: .4VA max. @ 20VAC OR VDC max
5. OPERATING FORCE: 150±50gf
6. CONTACTS: GOLD OVER NICKEL OVER COPPER ALLOY
7. ELECTRICAL LIFE: 10,000 CYCLES TYP.
8. ▲ LED COLOR: BLUE
9. CAP COLOR: BLACK
10. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	14156	UPDATE CIRCUIT	7/9/04	AR
B	14063	UPDATE CIRCUIT & TITLE	6/3/04	AR
A	13351	RELEASED FOR PRODUCTION	8/7/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: LBOABBR

SCALE	DATE	DR	DWG	REV
1.5:1	8/7/03	AR	B600003	C