



RECOMMENDED PANEL LAYOUT



CAP COLOR RED

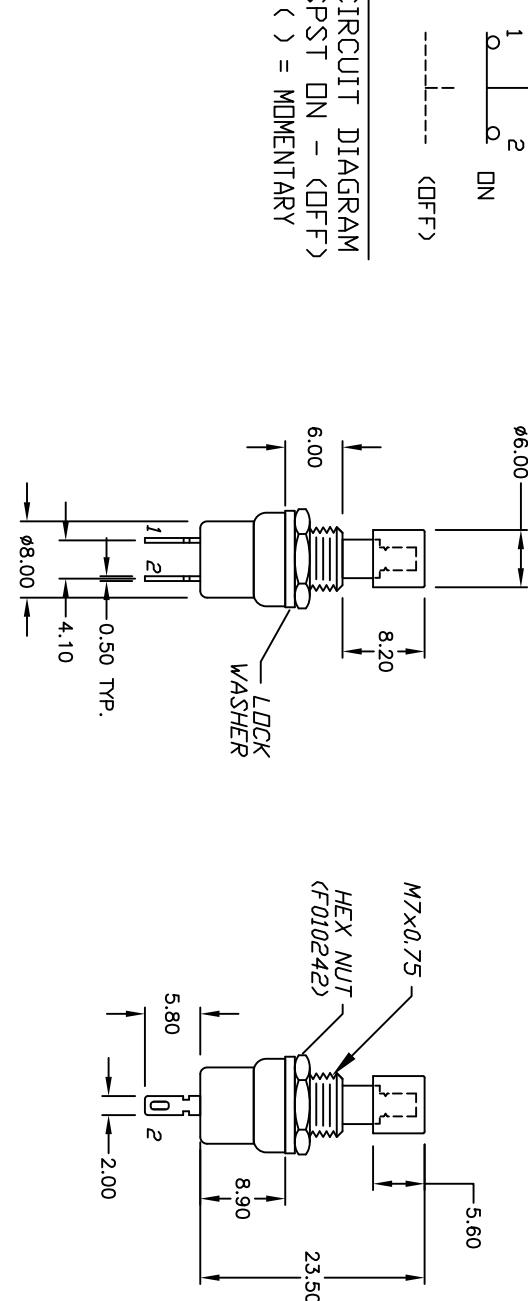

## NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NO'S FOR REFERENCE ONLY
4. RATING: 3A @ 125VAC; 1.5A @ 250VAC
5. CONTACT RESISTANCE:  
50 Milli-OHMS max.
6. INSULATION RESISTANCE:  
500V 100Mega-OHMS min.
7. DIELECTRIC STRENGTH:  
1000V 1 minute
8. 2002/95/EC (ROHS) COMPLIANT.
9. HARDWARE SUPPLIED;  
HEX NUT (SHOWN), LOCK WASHER

		TITLE		PS 1024BARED			
A	18674	RELEASE FOR PRODUCTION	10/15/09	BLR	DR	BLR	DWG

REV. ECN No. DESCRIPTION DATE CHK'D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 1.5:1 DATE 10/15/09 DR BLR DWG F010245 REV A