

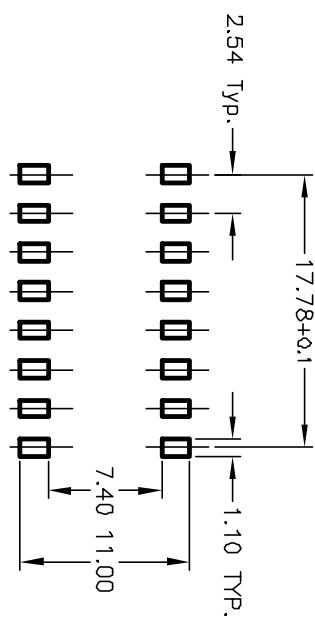
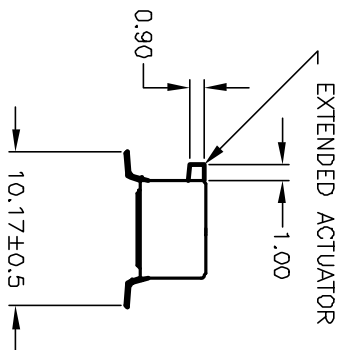
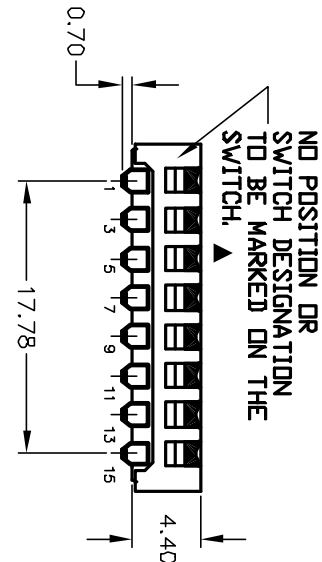


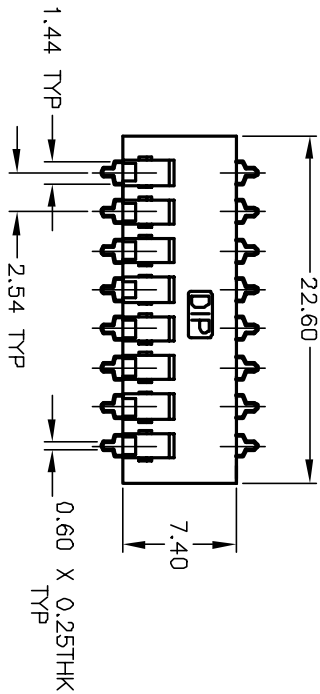

RECOMMENDED MOUNTING PADS

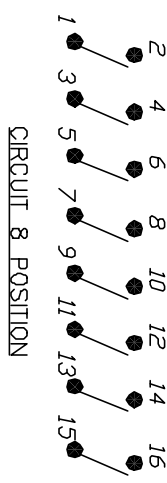

CIRCUIT 8 POSITION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC.
5. CONTACT MATERIAL:
COPPER ALLOY W/GOLD PLATE OVER
NICKEL PLATING
6. PACKAGED: TAPE & REEL
WITH ALL POLES IN THE "ON" POSITION.
(QTY 800 PER REEL)
7. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

B	12724	CHANGE NOTE 6, WAS DFF	1/13/03	CB	TITLE		
A	12530	WAS 2000501	8/20/02	RC	KAL2108 ER ND MARKING		
REV.	ECN No.	DESCRIPTION	DATE	CHKD	DR		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	REV
					2:1	8/20/02	B