


SHEET 1 OF 1

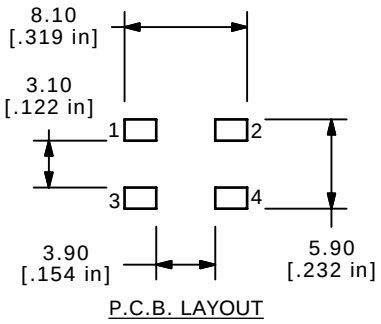


P.C.B. LAYOUT

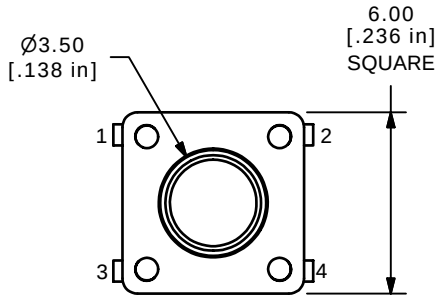





ISOMETRIC



CIRCUIT DIAGRAM

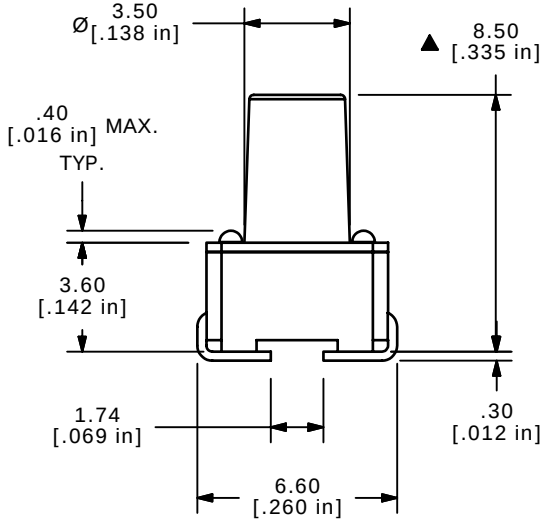

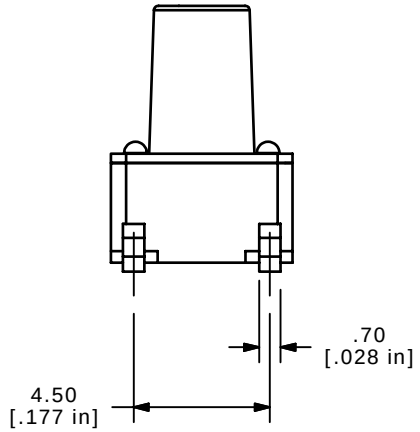

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X= ±0.4
   X.XX= ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
▲5. OPERATING FORCE: 65 GRAMS
6. TRAVEL: 0.25mm ±0.1
7. CONTACT RESISTANCE: 50 MILLI OHMS MAX. (INITIAL)
8. LIFE: 5 MILLION CYCLES
▲9. CONTACT: SILVER
▲10. PACKAGE: TUBE/90 PCS PER
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	17227	RELEASED FOR PRODUCTION	4/26/07	TN

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH™

TITLE LL3301PF065QJ

SCALE	DATE	DR	DWG	REV
4:1	4/26/2007	TN	P010465	A