


SHEET 1 OF 1

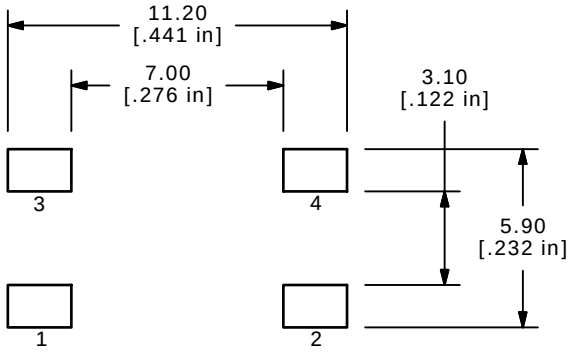


P.C.B. LAYOUT





CIRCUIT: SPST

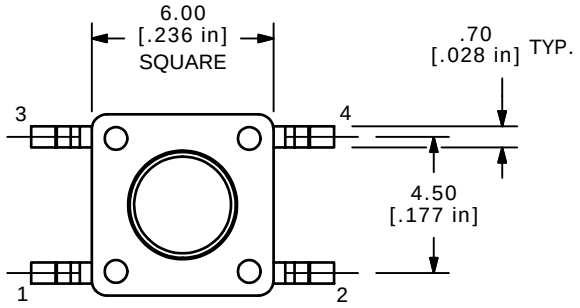



ISOMETRIC

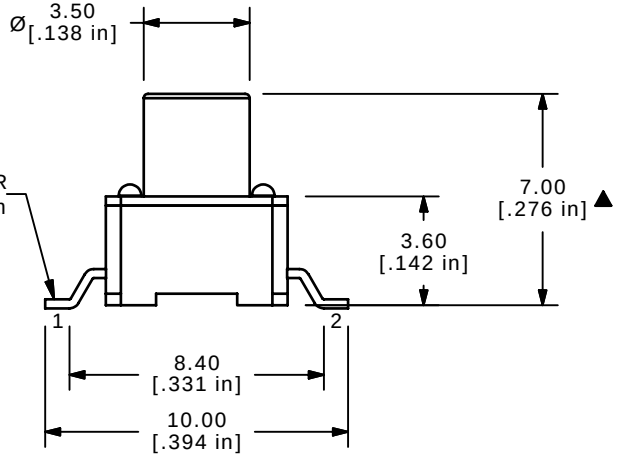



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.xx ± 0.4
   x.xx ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. TRAVEL: 0.25± 0.1mm
6. CONTACT RESISTANCE: 50m ohms max initial.MOS & TTC COMPATIBLE
7. ELECTRICAL LIFE: 5,000,000 CYCLES MIN.
8. INSULTION RESISTANCE: 100M ohms min.
9. DIELECTRIC STRENGTH: 250VA
10. OPERATING TEMP.: -30˚C to 85˚C
11. ▲DENOTES CRITICAL PARAMETER

▲12. CONTACT MATERIAL: SILVER

13. OPENING FORCE: 65± 20 GRAMS

▲14. PACKAGING: TAPE AND REEL/750 PER REEL

15. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	17413	PACKAGE CHANGED	6/27/07	TN
A	17079	RELEASED FOR PRODUCTION	3/12/07	TN

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH

TITLE LL3301FF065QG

SCALE	DATE	DR	DWG	REV
4:1	6/27/2007	TN	P090007	B