

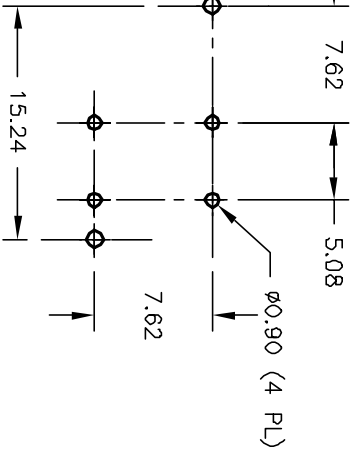
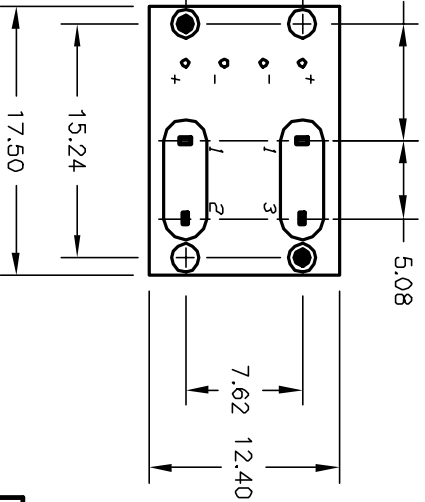
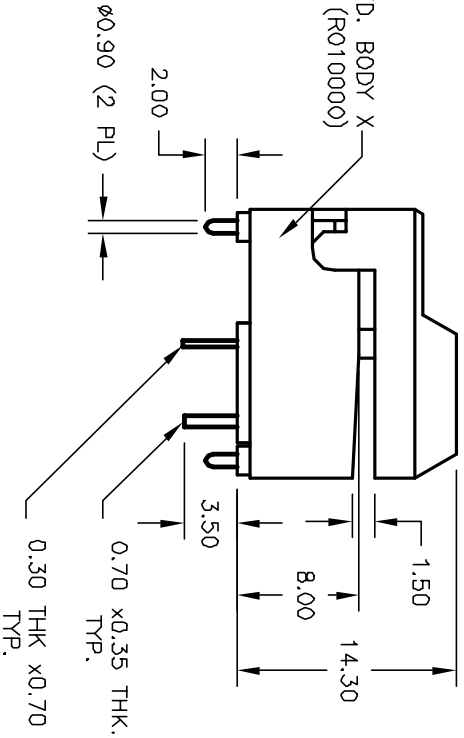


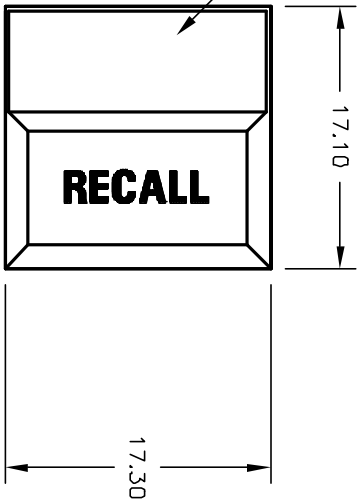

RECOMMENDED P.C.B LAYOUT



CIRCUIT: SPDT  
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE:  $X.X=\pm 0.4$   
 $X.XX=\pm 0.25$
3. TERM. NO. FOR REF. ONLY
4. RATING: 12mA 24V
5. OPERATING FORCE: <200gf
6. OPERATING TRAVEL 2.5 $\pm$ 0.2mm



**E-SWITCH®**

|                                                                                                              |         |                         |         |      |                     |      |    |         |     |
|--------------------------------------------------------------------------------------------------------------|---------|-------------------------|---------|------|---------------------|------|----|---------|-----|
|                                                                                                              |         |                         |         |      | TITLE               |      |    |         |     |
|                                                                                                              |         |                         |         |      | 5511 M-2-X "RECALL" |      |    |         |     |
| A                                                                                                            | 11925   | RELEASED FOR PRODUCTION | 1/31/03 | CJB  | SCALE               | DATE | DR | DWG     | REV |
| REV.                                                                                                         | ECN No. | DESCRIPTION             | DATE    | CHKD | 2:1                 | --   | -- | XR0128B | A   |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |         |                         |         |      |                     |      |    |         |     |