

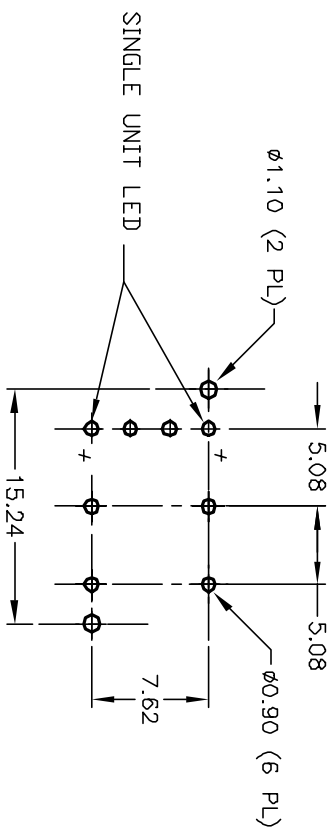
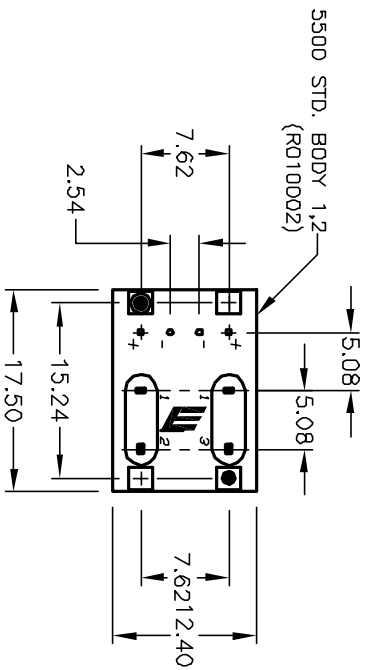
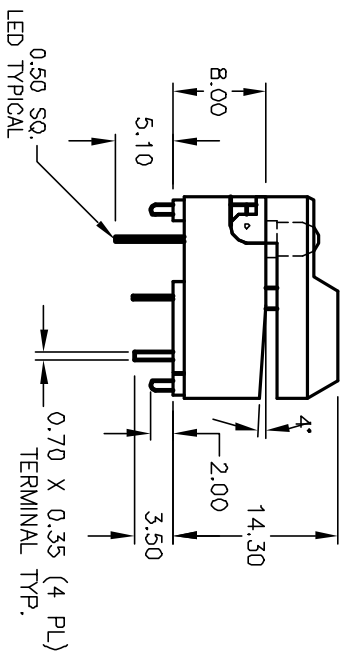


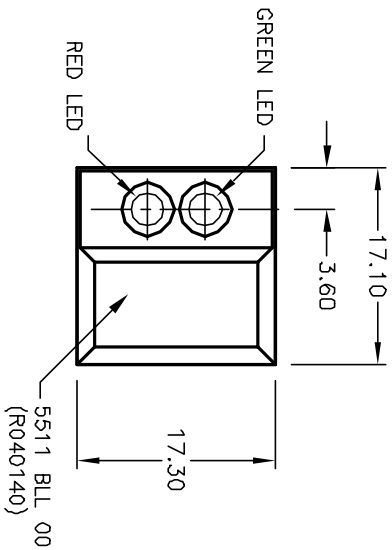

RECOMMENDED P.C.B. LAYOUT

LED SPECIFICATION	SYMBOL	RED L.E.D		GREEN L.E.D		UNITS
		MAX.	MIN.	TYP.	MAX.	
POWER DISSIPATION	P _D	80	--	100	--	mW
FORWARD VOLTAGE	V _F	2.8	1.9	2.2	2.8	V
REVERSE VOLTAGE	V _R	5		5		V
EMISSION WAVELENGTH	λ _P			695		nm
AVE. FORWARD CURRENT	I _{AF}	30	--	30	--	mA
LUMINOUS INTENSITY	I _V		0.7	22		mcđ



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NO. FOR REF. ONLY
4. RATING: 12mA @24V
5. FIXED CONTACT/MOVING CONTACT:
COPPER ALLOY W/GOLD PLATE
6. CONTACT BOUNCE: <5m SEC.
7. CONTACT RESISTANCE: <50milli-OHMS

CIRCUIT: SPDT
CONTACT CONFIGURATION

E-SWITCH®

A	12128	RELEASED FOR PRODUCTION	5/8/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				

TITLE				
5511-M-1-1,2				
SCALE	DATE	DR	DWG	REV
1.5:1	5/8/02	CJB	XR0166P	A