

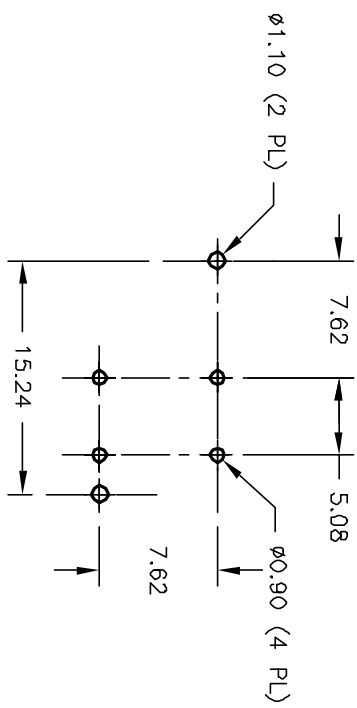
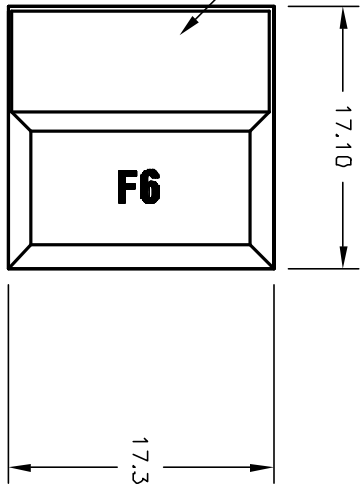





RECOMMENDED P.C.B LAYOUT

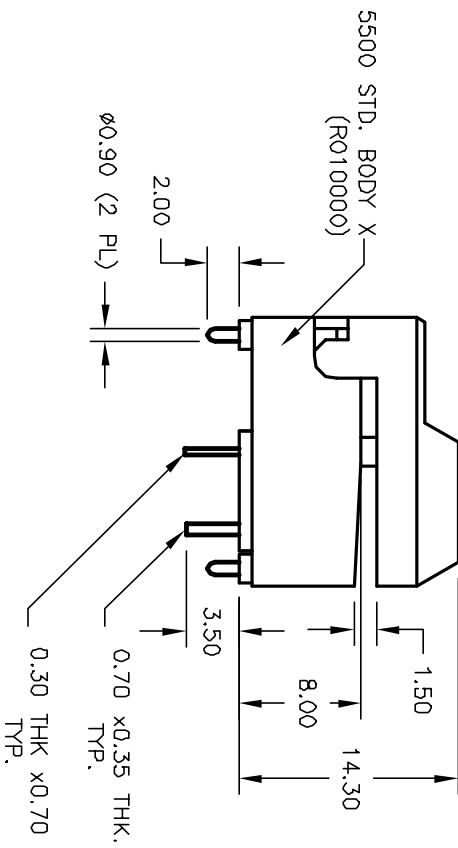

CIRCUIT: SPDT
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X,X=±0.4
X,XX=±0.25
3. TERM. NO. FOR REF. ONLY
4. RATING: 12mA 24V
5. OPERATING FORCE: <200gf
6. OPERATING TRAVEL 2.5±0.2mm

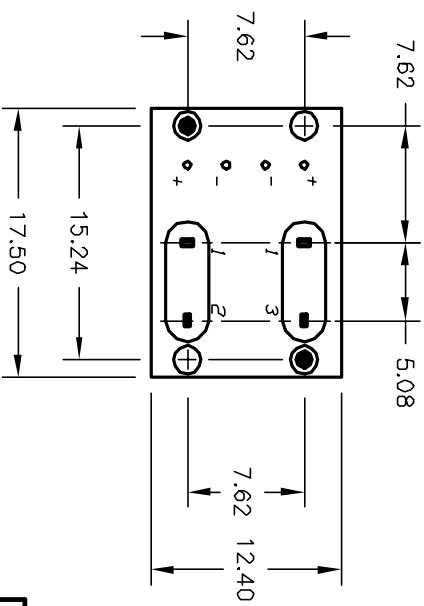

E-SWITCH®

				TITLE		
				5511 M-2-X "F6"		
A	11925	RELEASED FOR PRODUCTION	2/03/03	CJB		
REV.	ECN No.	DESCRIPTION	DATE	CHKD		
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						
SCALE			DATE	DR	DWG	REV
2:1			--	--	XR0190A	A