

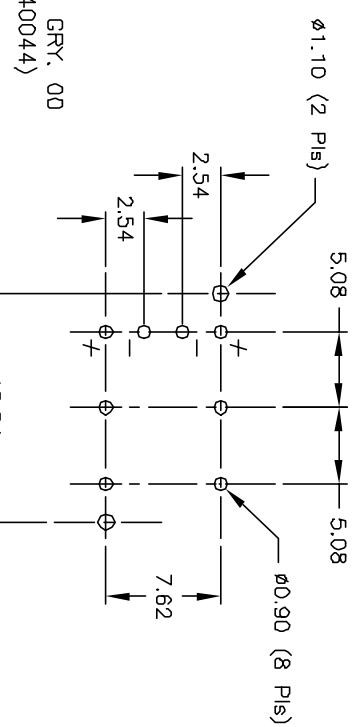
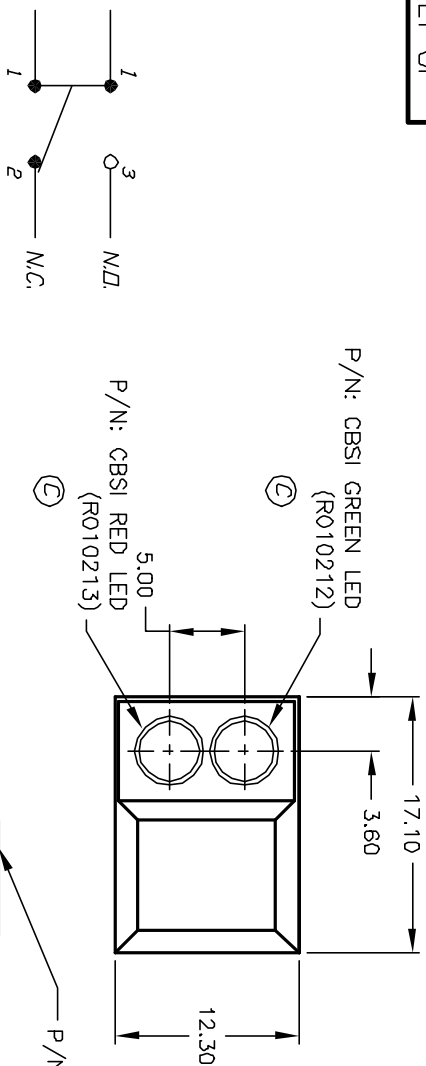
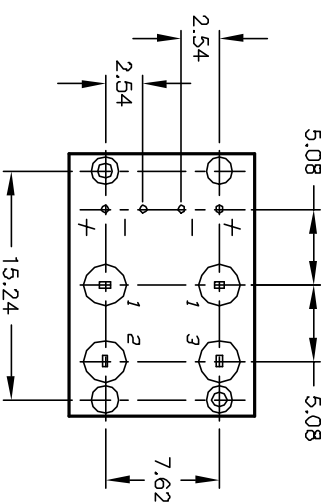


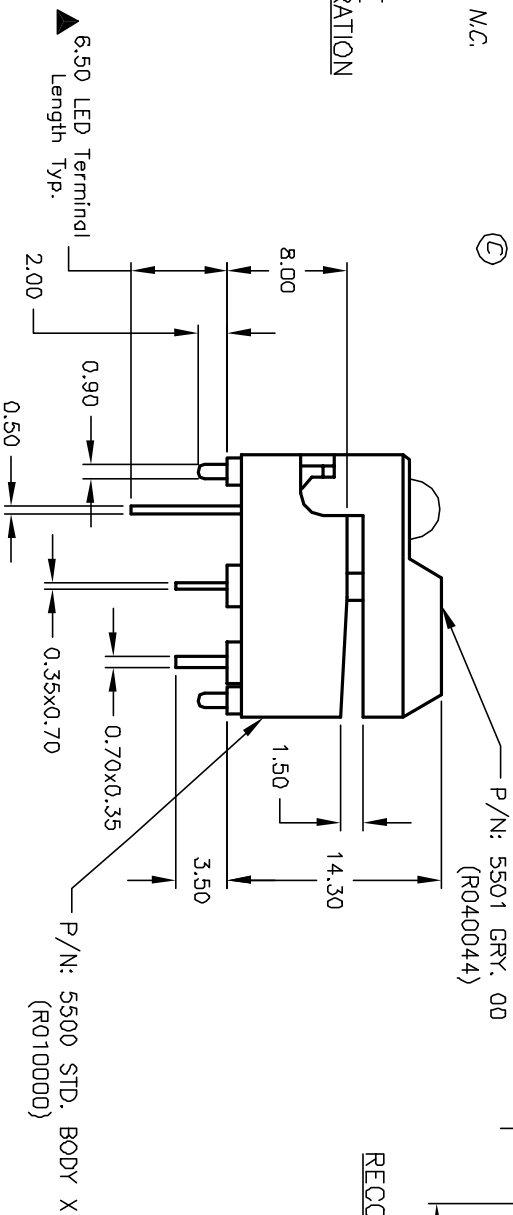

CIRCUIT: SPDT
CONTACT CONFIGURATION



L.E.D INFO.:

Color	Intensity (mcd)	Forward Voltage	Forward Current	Power Dissipation
RED	8 - 50	2.5V	10mA	105mW
GREEN	8 - 32	2.5V	10mA	105mW

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 12mA, @24V
 5. OPERATING TRAVEL: 2.5±0.2mm
 - ▲ 6. DESIGNATE MAJOR DIMENSIONS
 - *7. L.E.D INFO.: See Table

C	12783	REVISED COMPONENT, DESCRIPTION	2/3/03	CB
B	10615	REVISED & REDRAWN	5/3/00	MM
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE				
5501-M-2-1,2 (CBSI)-RED/GREEN LED				
SCALE	DATE	DR	DWG	REV
4:1	5/2/00	MM	XR0207P	C