


## P.C. MOUNTING




| SWITCH FUNCTION |        |               |
|-----------------|--------|---------------|
| POS. 1          | POS. 2 | POS. 3        |
|                 |        |               |
| ON              | NONE   | ON            |
| 2-3, 5-6, 8-9   | N/A    | 2-1, 5-4, 8-7 |




## CIRCUIT: 3PDT

## NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- ▲ PLATING MATERIAL: GOLD
- RATING: 0.4 (VA) MAX. @20V MAX.
- ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

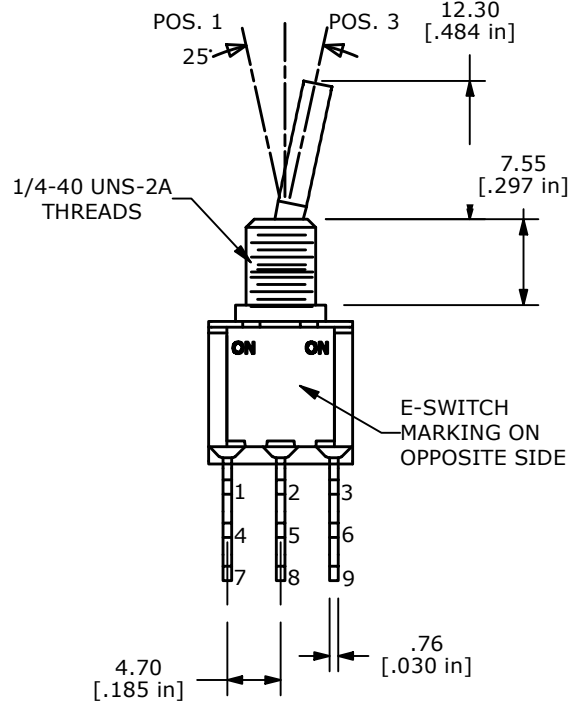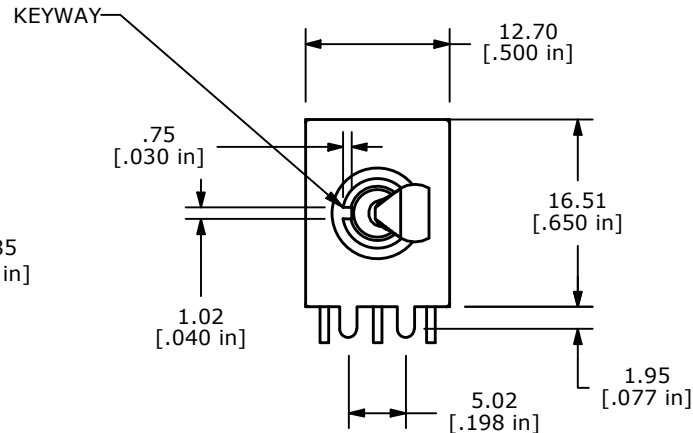

ISOMETRIC

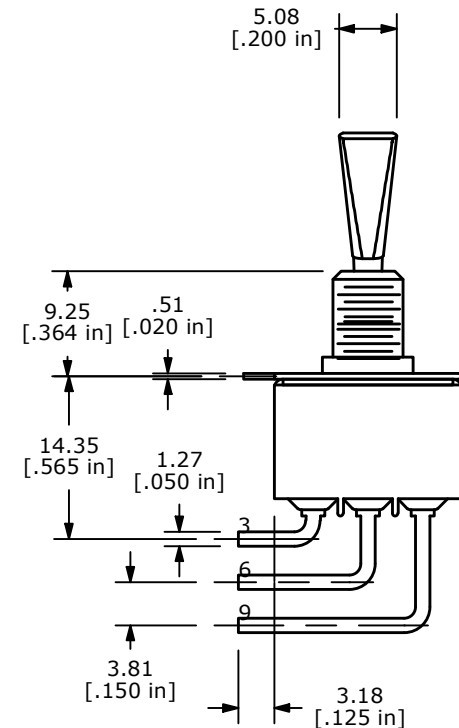

|     |        |                                    |         |    |
|-----|--------|------------------------------------|---------|----|
| C   | 15275  | ORIENTATION OF BUSHING AND NOTE 11 | 9/14/05 | PH |
| B   | 15164  | CHANGED ORIENTATION ON BUSHING     | 8/10/05 | PV |
| A   | 14908  | RELEASED FOR PRODUCTION            | 5/10/05 | JB |
| REV | PCR NO | DESCRIPTION                        | DATE    | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

**E-SWITCH®**

TITLE 1003P1T6B11M6RE

SCALE 2:1

DATE 5/10/2005

DR JB

DWG T111608

REV C