

SHEET 1 OF 1




RECOMMENDED PANEL MOUNTING

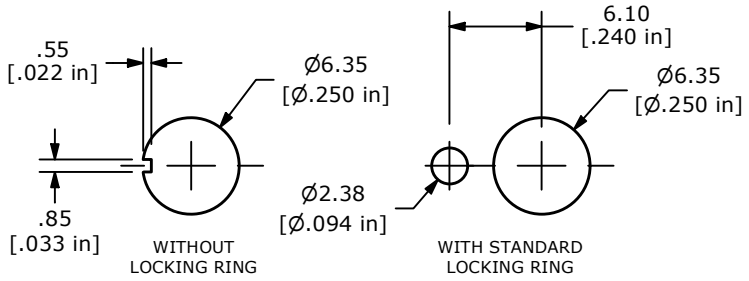


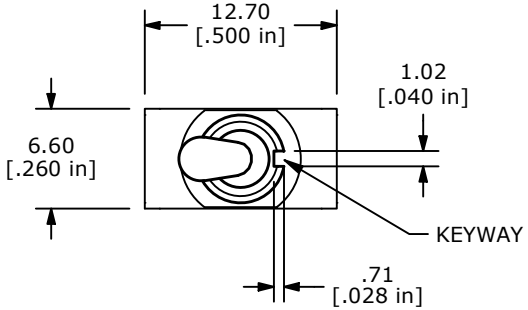


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	N/A	2-1



CIRCUIT: SPDT

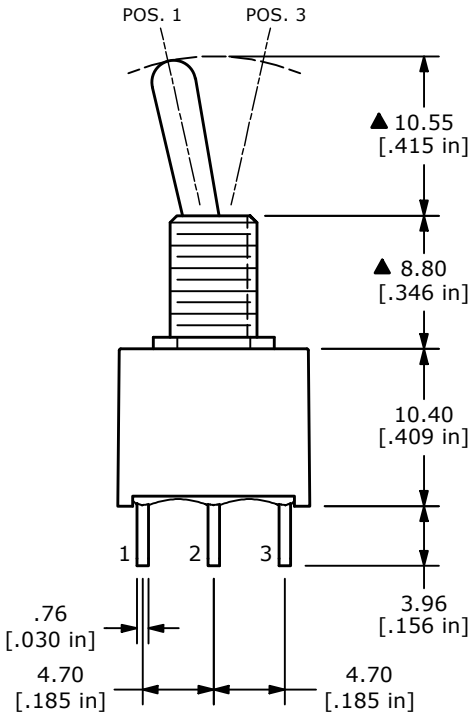

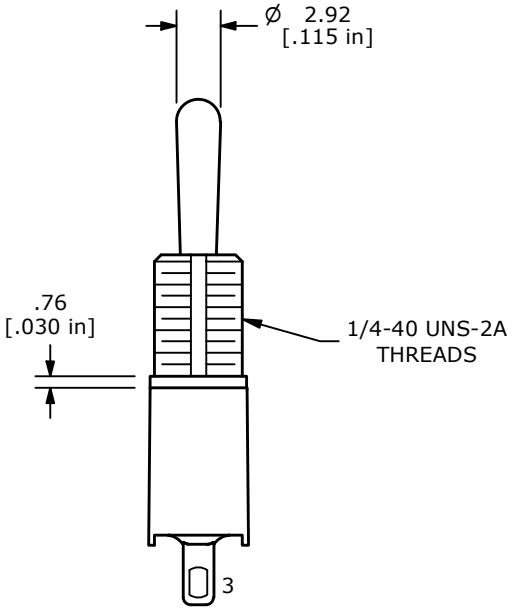

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS WITH RESISTIVE LOAD @ 120 VAC or 28VDC
   2 AMPS WITH RESISTIVE LOAD @ 250VAC
6. ELECTRICAL LIFE: 6,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
▲11. HARDWARE INCLUDED: T100011 - LOCK WASHER, QTY 1
   T100015 - LOCK RING, QTY 1
   T100000 - HEXNUT, QTY 2

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-104245	Print update	07/15/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000022836

TITLE 100AWSP1T1B1M1QEH

SCALE	DATE	DR	DWG	REV
2:1	7/5/2006	MW	ST101018	B