


SHEET 1 OF 1


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3, 5-6	N/A	2-1, 5-4




CIRCUIT: DPDT

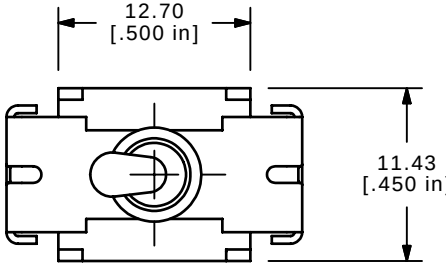


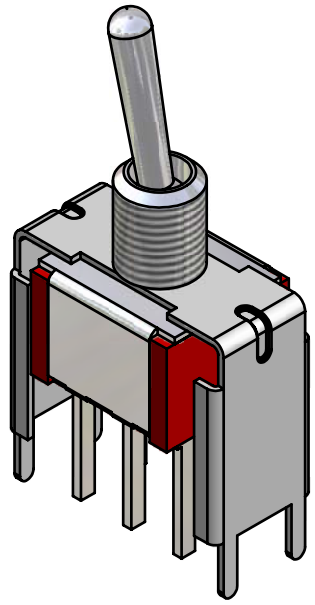

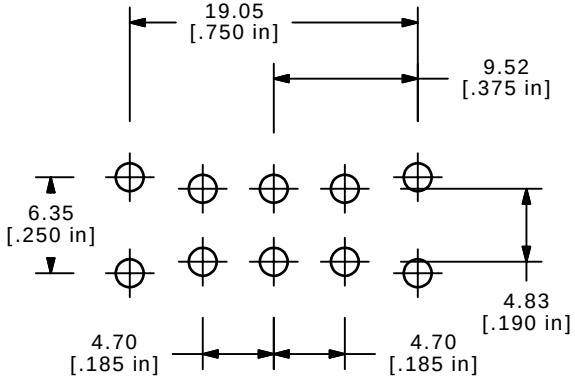

RECOMMENDED PANEL MOUNTING

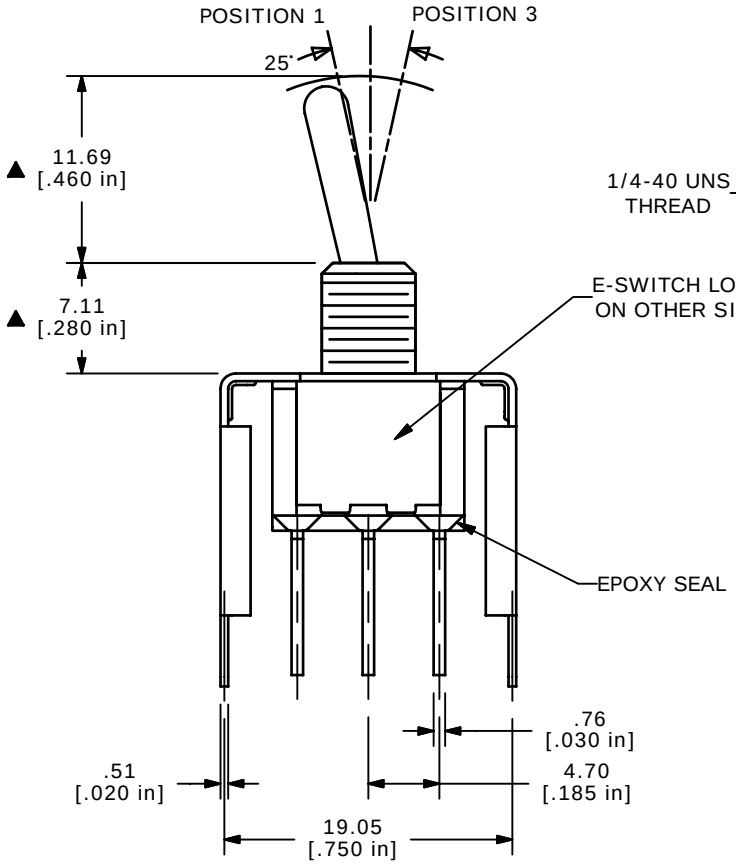

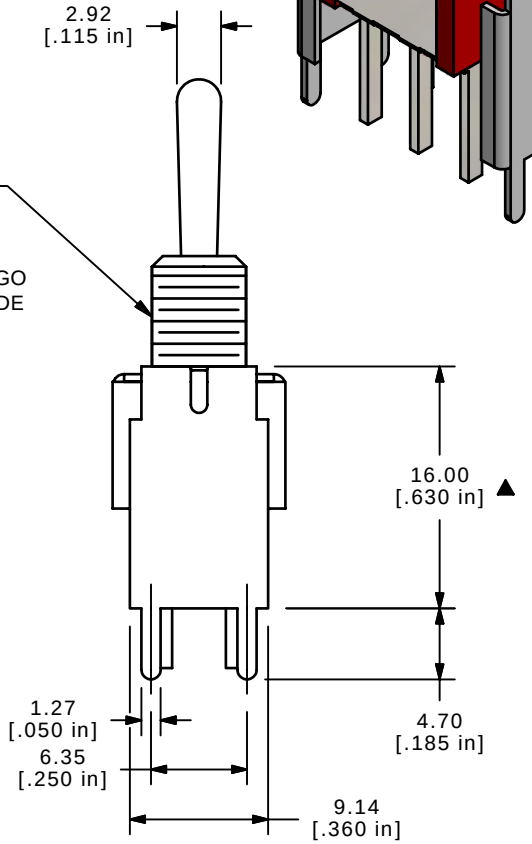

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x=±0.4
   x.xx=±0.25
3. TERM. NUMBERS FOR REFERENCE ONLY
▲ 4. RATING: 0.4VA @ 20V AC MAX.
▲ 5. FIXED TERM. & MOVING CONTACT:
   COPPER ALLOY W/GOLD PLATE
   OVER NICKEL PLATE
6. ELECTRICAL LIFE: 40,000 MAKE-AND
   BREAK CYCLES AT FULL LOAD
7. INSULATION RESISTANCE: 1,000M OHM MIN.
8. DIELECTRIC STRENGTH: 1000V RMS
   @ SEA LEVEL
9. OPERATING TEMP: -30˚C to 85˚C
10. ▲DENOTES CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
C	16078	REVISED AND REDRAWN	6/1/2006	CT

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100DP1T1B3VS5RE

SCALE	DATE	DR	DWG	REV
2:1	11/19/2002	CB	T121136	C