
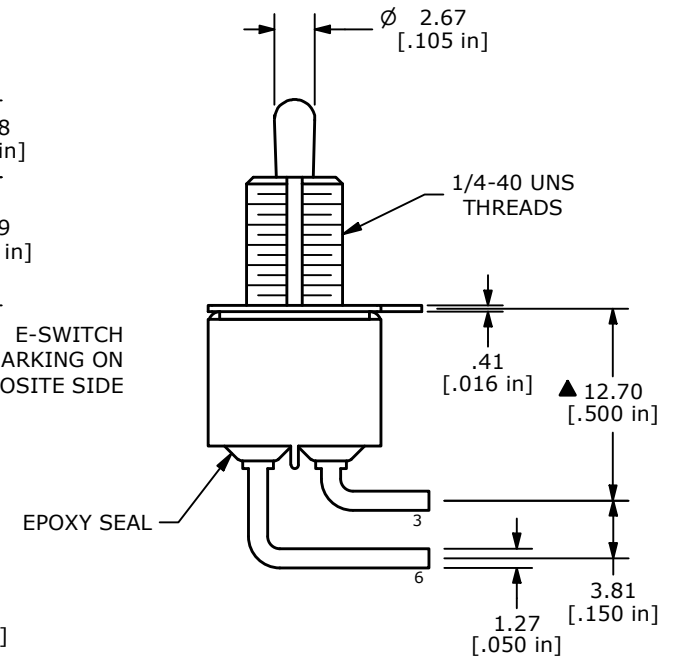
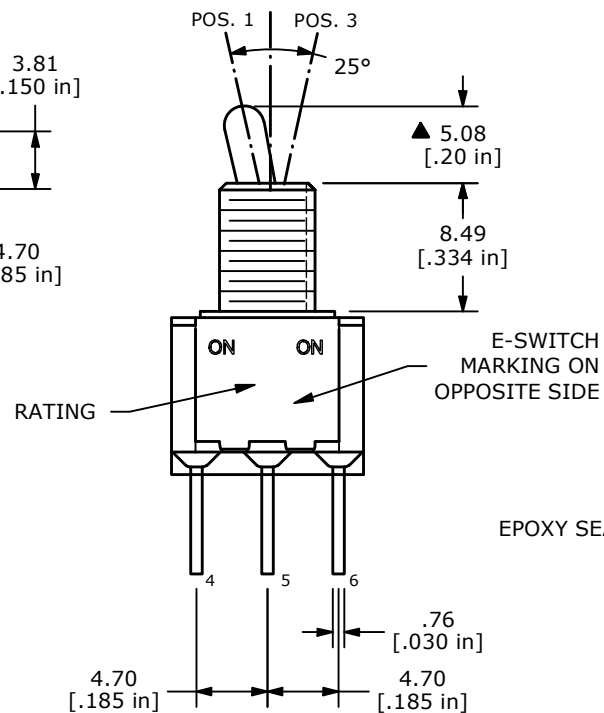
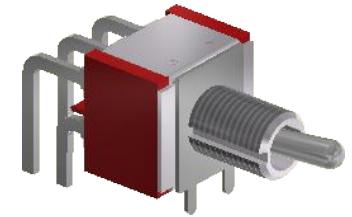
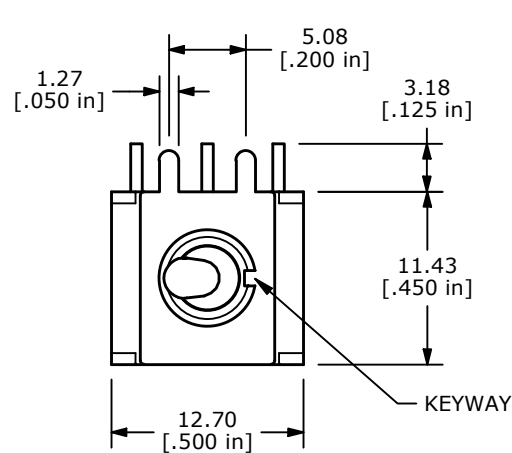
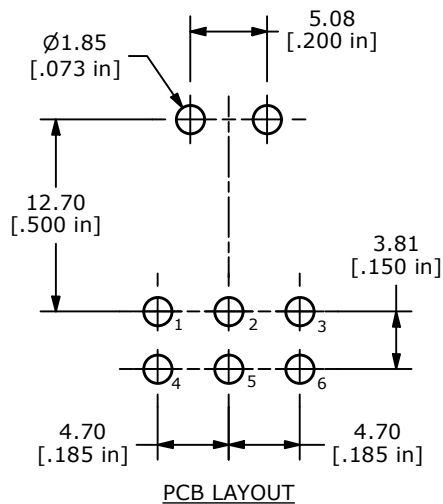


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	N/A	ON
2-3, 5-6	N/A	2-1, 5-4

**NOTE:**

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS W/RESISTIVE LOAD @ 120VAC or 28VDC
2 AMPS W/RESISTIVE LOAD @ 250VAC
6. LIFE EXPECTANCY: 40,000 make-and-break cycles at full load
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. CONTACT RESISTANCE: 10 MILLI-OHMS MAX.
9. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.



OBJECT ID
000024269

A	24290	RELEASED FOR PRODUCTION	5/5/20	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE 100DP1T2B1M6QE

SCALE
2:1

DATE
5/5/2020

DR
MW

DWG
T121152

REV
A