


SHEET 1 OF 1

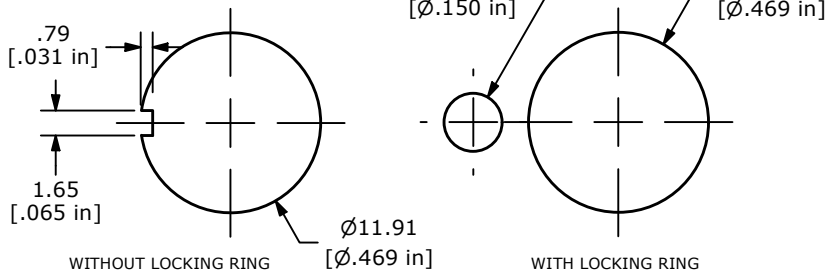


RECOMMENDED PANEL MOUNTING

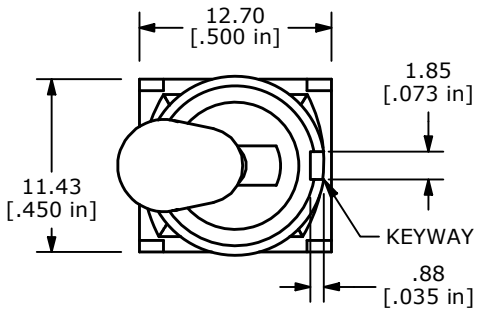


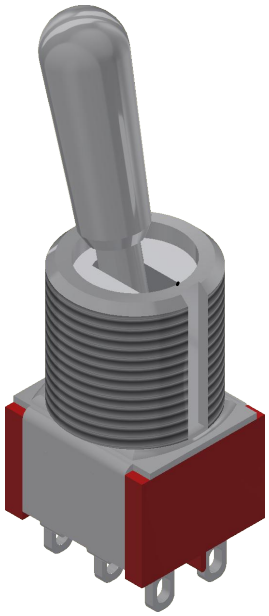


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	N/A	2-1, 5-4



CIRCUIT: DPDT

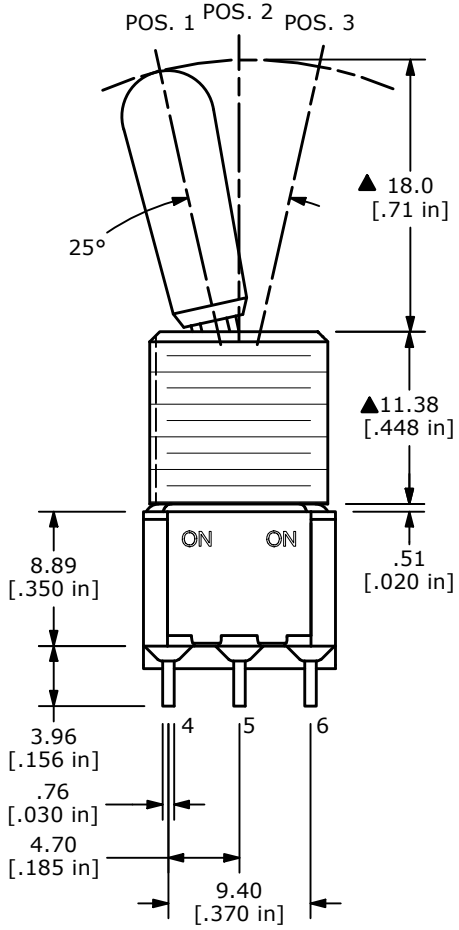

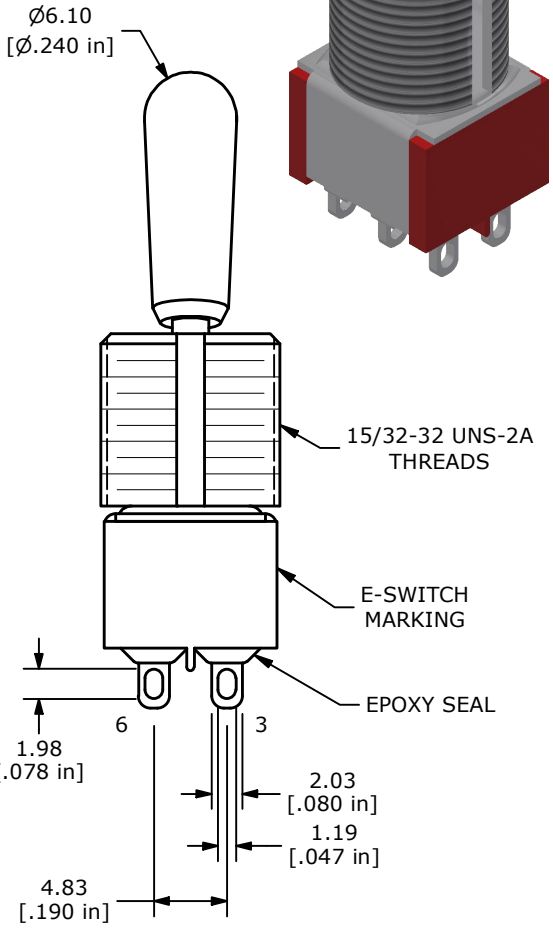

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
▲ 5. RATING: 2A @ 250 VAC
   5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 6,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. HARDWARE INCLUDED
   T100012 - LOCK WASHER - QTY 1
   T100003 - LOCK RING - QTY 1
   T100004 - HEX NUT - QTY 2

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-103817	DIM 18.0 WAS 17.56	12/16/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000023100

TITLE 100DP1T8B13M1QEH

SCALE	DATE	DR	DWG	REV
2:1	2/17/2005	AR	ST121000	C