


PC MOUNTING





SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4



CIRCUIT: DPDT

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. PLATING MATERIAL: GOLD OVER SILVER
GOLD: 10 MICRO INCH OVER
SILVER: 400 MICRO INCH
5. RATING: 2A@250VDC, 5A@120VDC OR 28VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHMS MIN
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

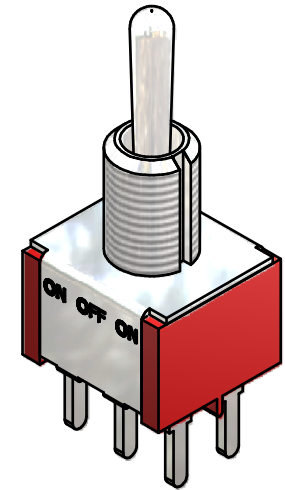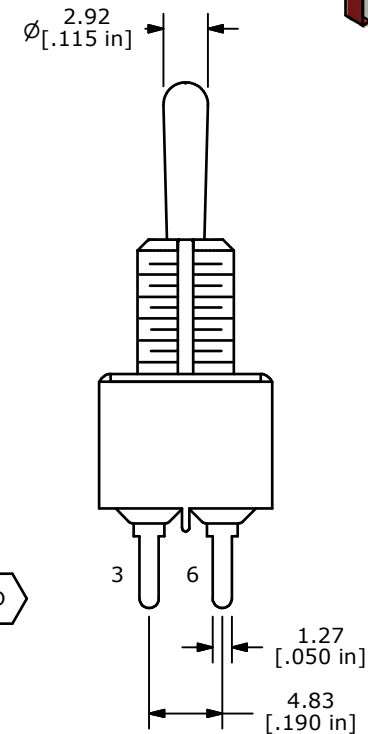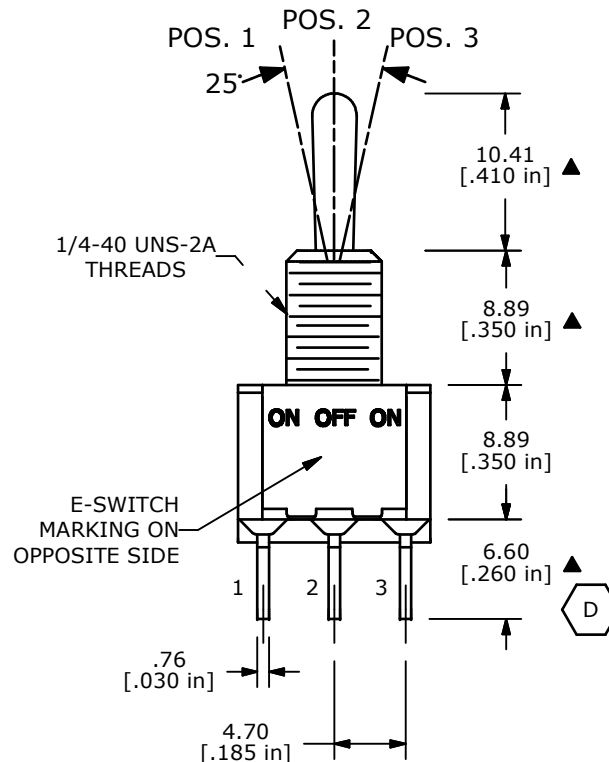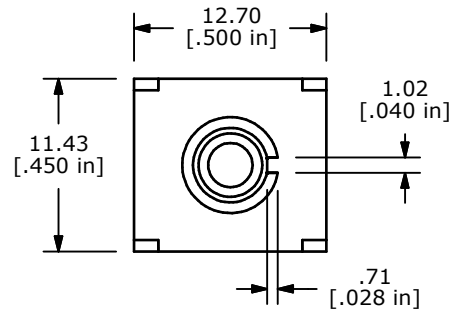

ISOMETRIC

D	20801	6.60 WAS 6.35	10/1/12	EBP
C	15203	CORRECT RATING NOTE	8/26/05	PH
B	14552	CORRECT RATING & PLATING NOTES	11/30/04	AR
A	14470	RELEASED FOR PRODUCTION	11/9/04	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 100DP3T1B1M2CE

SCALE 2:1

DATE 11/9/2004

DR AR

DWG T123502

REV D