


SHEET 1 OF 1

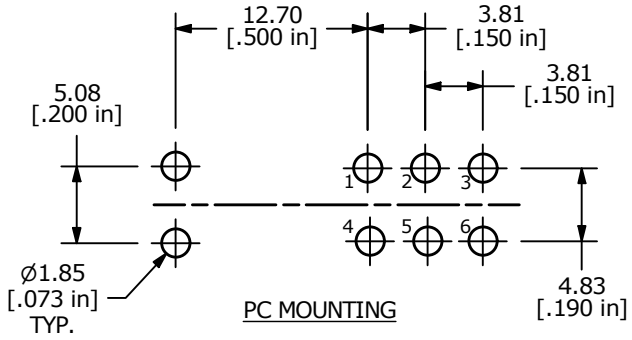


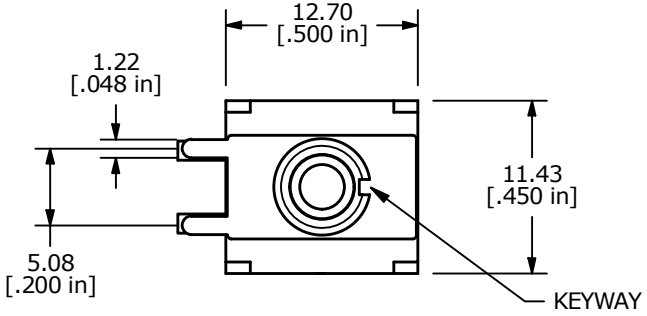





▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	(ON)
2-3, 5-6	OPEN	2-1, 5-4

( ) = MOMENTARY



CIRCUIT: DPDT

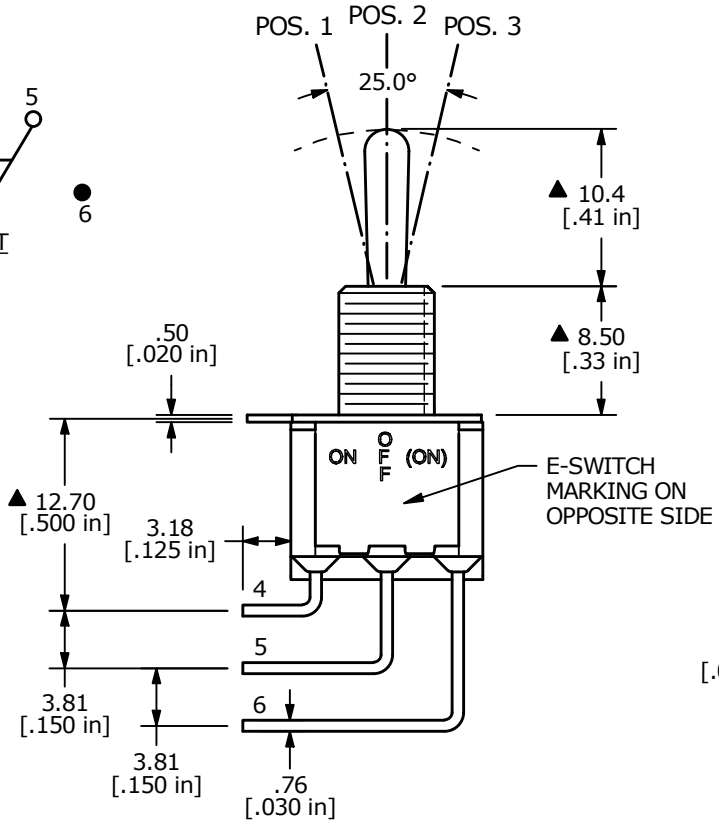

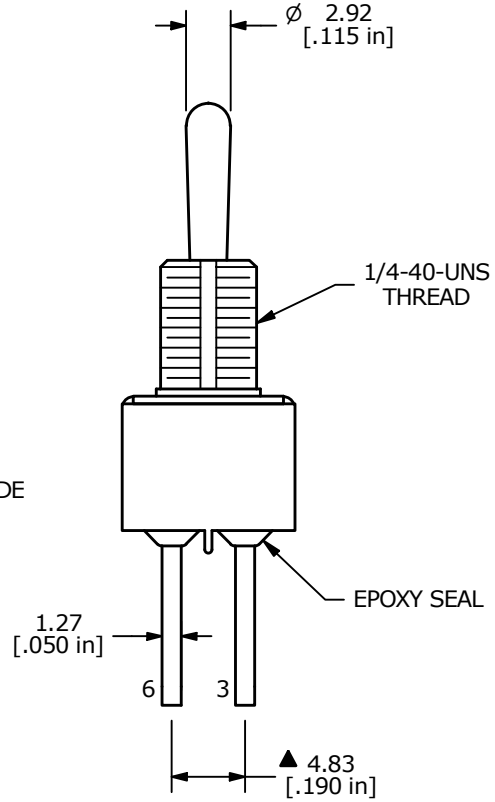

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 5 AMPS @ 120VAC OR 28VDC
   2 AMPS @ 250VAC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
▲11. HARDWARE TO BE SHIPPED BULK
   T100000 - HEXNUT - QTY 2
   T100011 - LOCKWASHER - QTY 1
   T100015 - LOCKRING - QTY 1

REV	PCR NO	DESCRIPTION	DATE	BY
A	24644	Release	12/16/20	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH

TITLE 100DP5T1B1M7QEH

SCALE	DATE	DR	DWG	REV
2:1	12/15/2020	MW	ST121117	A