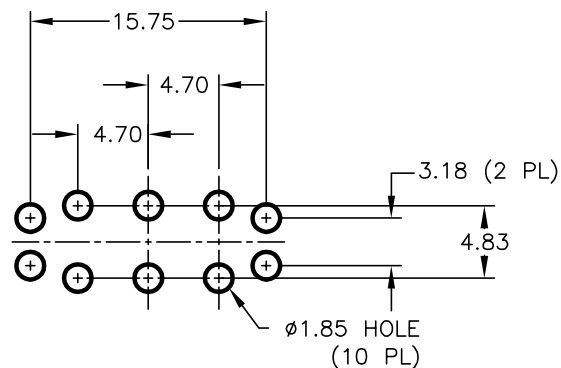
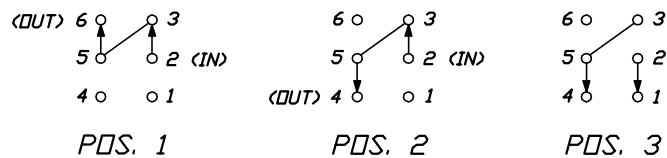




RECOMMENDED PCB LAYOUT

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
<DN>	DN	<DN>
2-3,5-6	2-3,5-4	2-1,5-4

() = Momentary

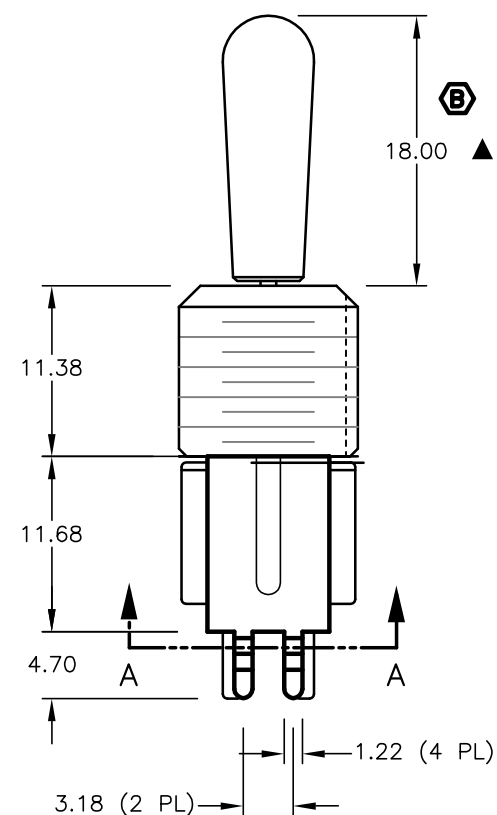
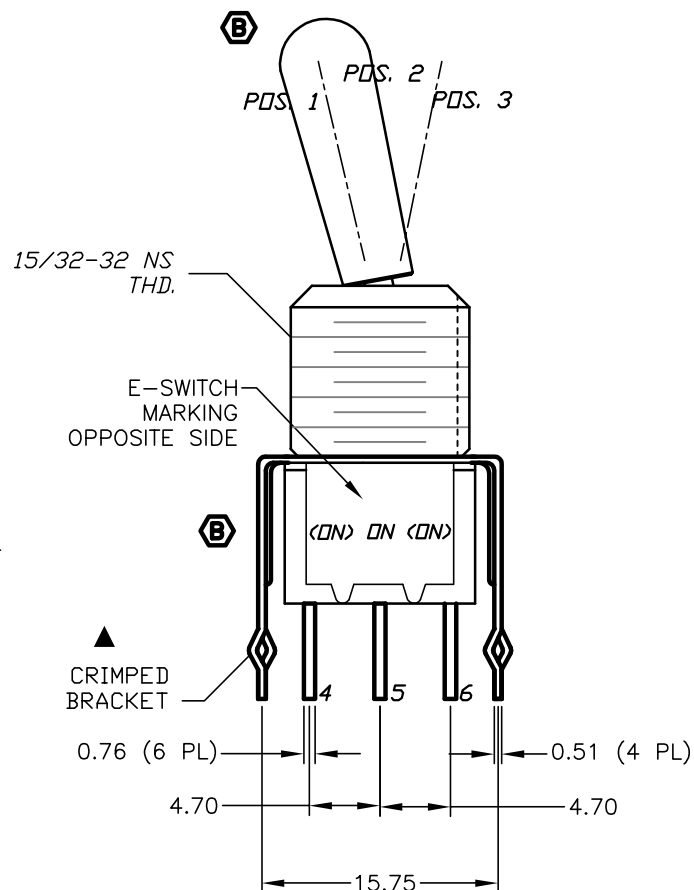
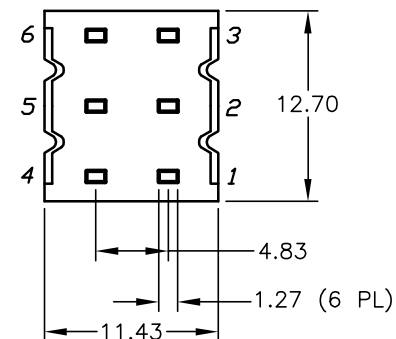
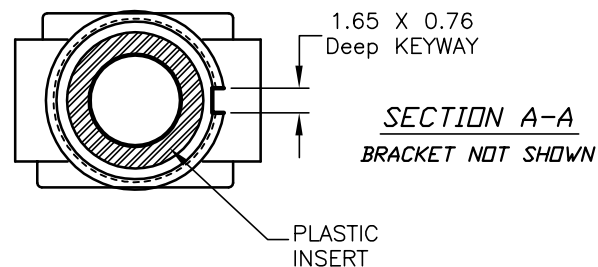


CIRCUIT: DPDT 3-WAY

NOTE: JUMPER PIN 3 TO PIN 5

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @120VAC or 28VDC.
2A @250VAC
5. FIXED TERM. & MOVING CONTACT:
Copper Alloy w/Silver plate.
6. ELECTRIC LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C

**E-SWITCH®**

B	13479	UPDATE ACTUATOR, FUNCTION TEXT	9/19/03	AR
A	12604	RELEASED	12/3/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

100 DP-8 T8 B13 VS21 Q<NO EPOXY>

SCALE

2:1

DATE

12/3/02

DR

CJB

DWG

T128811

REV

B