


SHEET 1 OF 1

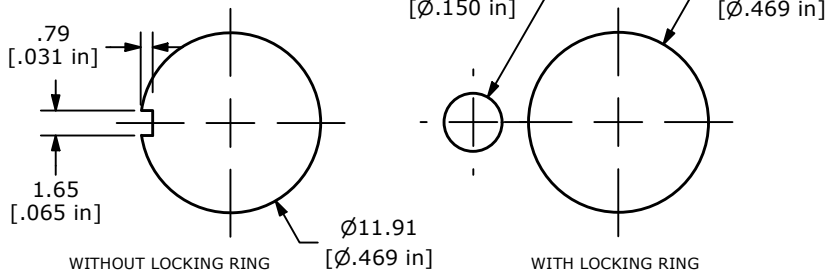


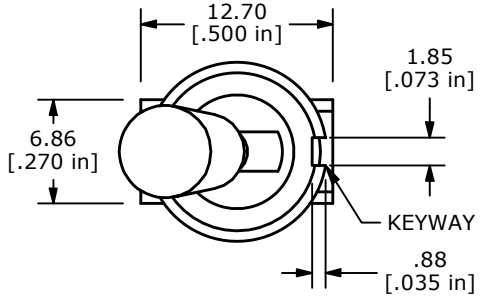



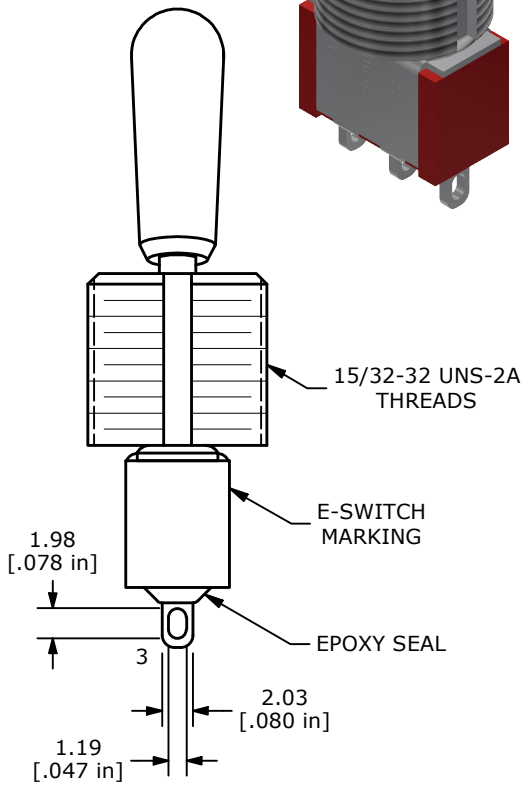
RECOMMENDED PANEL MOUNTING

| ▲ SWITCH FUNCTION | | |
|---|---|---|
| POS. 1 | POS. 2 | POS. 3 |
| ON | OFF | ON |
| 2-3 | OPEN | 2-1 |

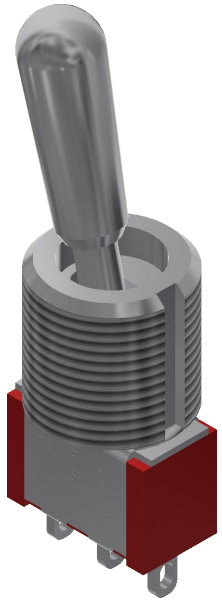


CIRCUIT: SPDT

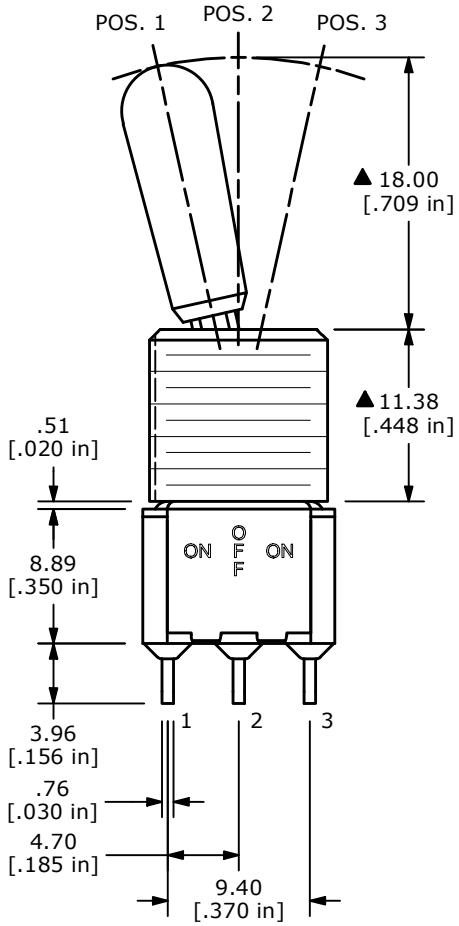


NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A @ 250 VAC
   5A @ 120 VAC OR 28 VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL
9. OPERATING TEMP.: -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

| REV | ECO NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| D | ECO-102300 | 100 SERIES UPDATE | 11/01/23 | MR |
| | | | | |
| | | | | |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH®

OBJECT ID 000024014

TITLE 100SP3T8B13M1QE

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 2:1 | 8/2/2007 | BF | T113021 | D |