
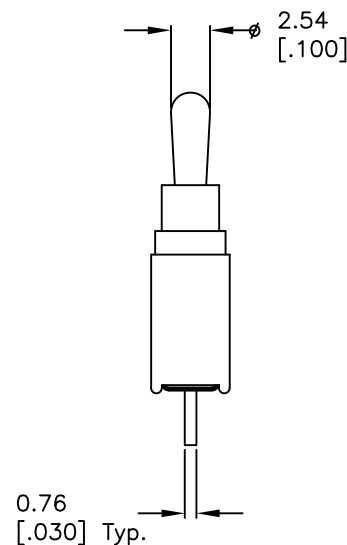


RECOMMENDED P.C.B. LAYOUT

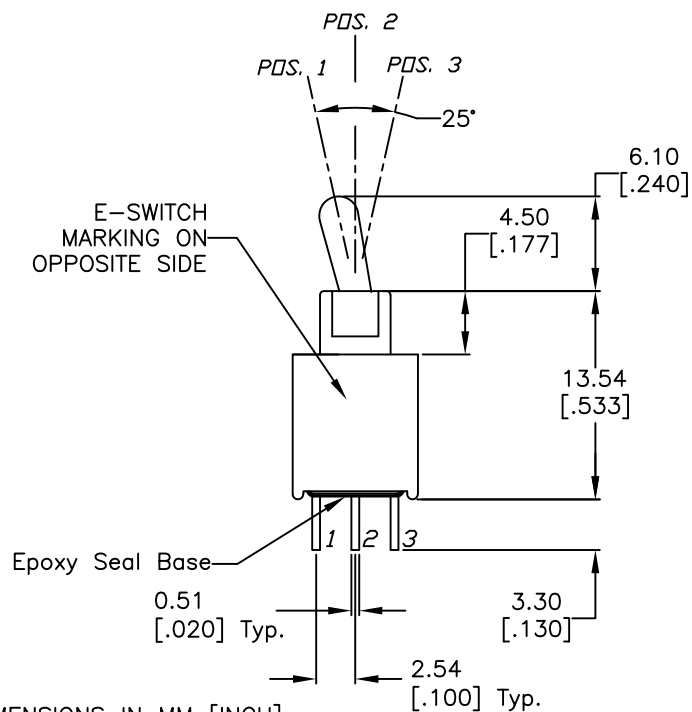

CIRCUIT: SPDT CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
ON	OFF	<ON>
2-3	OPEN	2-1

< >=Momentary

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 3A @120VAC Or 28V DC
1A @250VAC
5. FIXED TERM. & MOVING CONTACT: Silver plated copper alloy
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
9. OPERATING TEMP.: -30°C to 85°C
- ▲ 10. ACTUATION FORCE: 1000gf

E-SWITCH®

B	21002	13.54 WAS 13.39	2/4/13	EBP
A	11558	RELEASED FOR PRODUCTION	7/5/01	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

TITLE

200AWMSP5T2A1M2QE1000GF

SCALE

2:1

DATE

7/5/01

DR

CB

DWG

T201600

REV

B