



SHEET OF

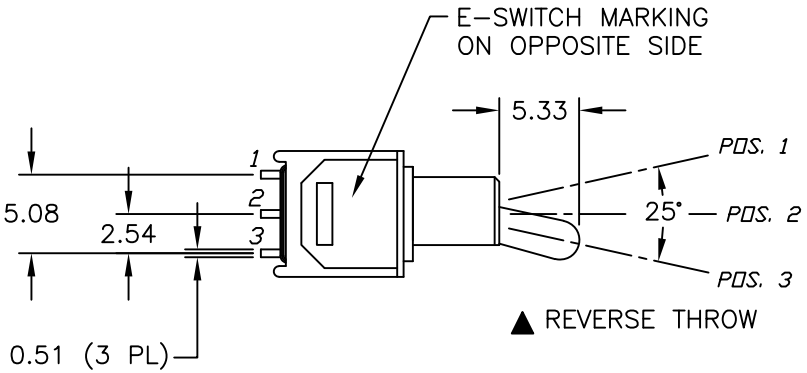


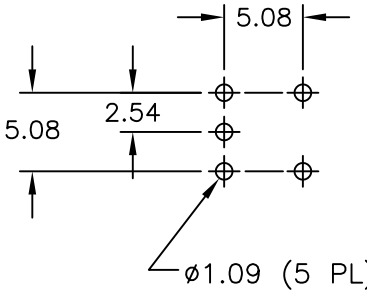

RECOMMENDED PCB LAYOUT

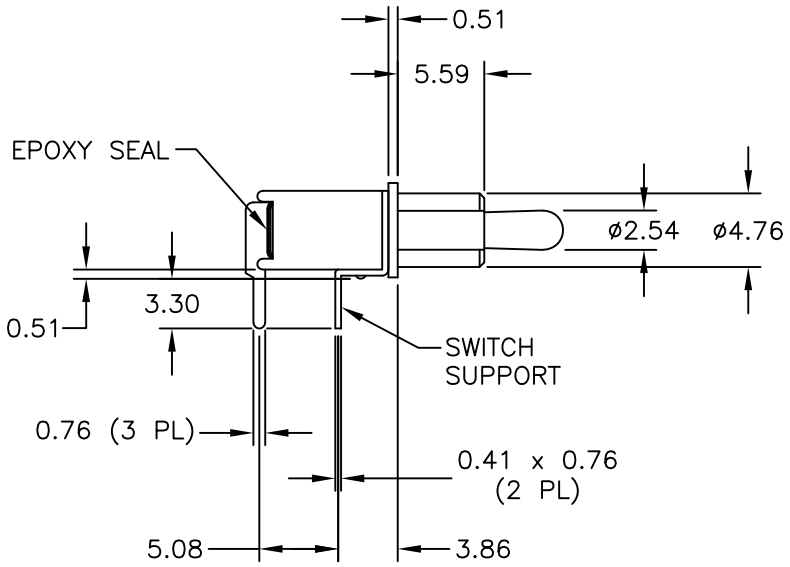

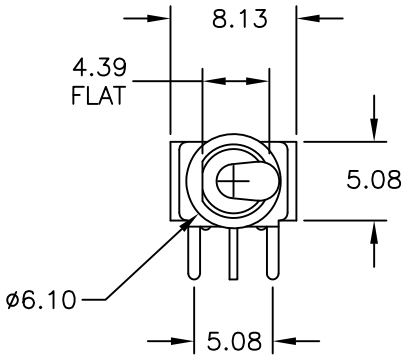



SPDT CIRCUIT

CONTACT CONFIGURATION

	SWITCH FUNCTION		
	POS. 1	POS. 2	POS. 3
▲	(ON)	NONE	ON
	2-3	OPEN	2-1

() = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4 0.00=±0.25
3. TERM. NOS. FOR REF ONLY
4. RATING: 0.4 (VA) MAX @20VAC OR DC MAX
5. ELECTRIC LIFE: 30,000 MAKE AND BREAK CYCLES AT FULL LOAD
6. INSUL RESISTANCE: 1,000 MEGA–OHM MIN
7. DIELECTRIC STRENGTH: 1,000V RMS @SEA LEVEL
8. OPERATING TEMP: –30°C TO +85°C
9. ▲ DESIGNATE MAJOR DIMENSION

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11023	RELEASED FOR PRODUCTION	10/19/00	PML

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: (REVERSE THROW) 200 MSP2 T2 B2 M6 R E

SCALE	DATE	DR	DWG	REV
2:1	10/19/00	PML	T211096	A