


SHEET 1 OF 1

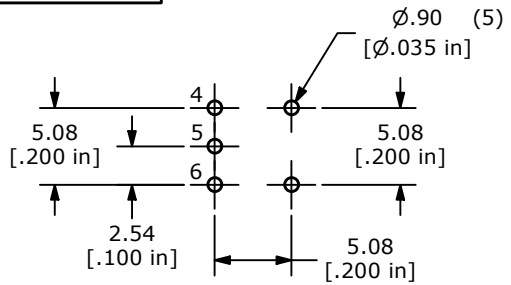



RECOMMENDED
PCB LAYOUT

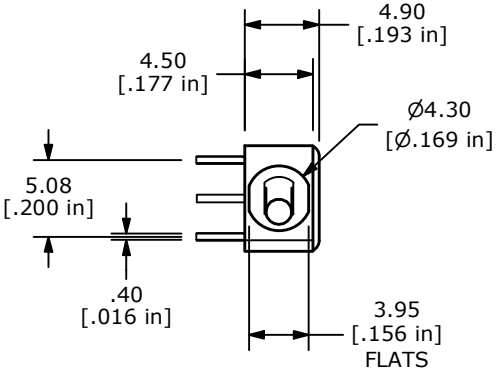






| ▲ SWITCH FUNCTION | | |
|---|---|---|
| POS. 1 | POS. 2 | POS. 3 |
|  |  |  |
| ON | NONE | ON |
| 5-6 | N/A | 5-4 |




▲ CIRCUIT: SPDT
ON - ON

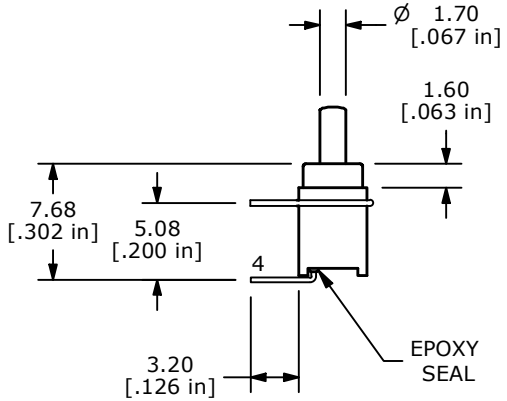

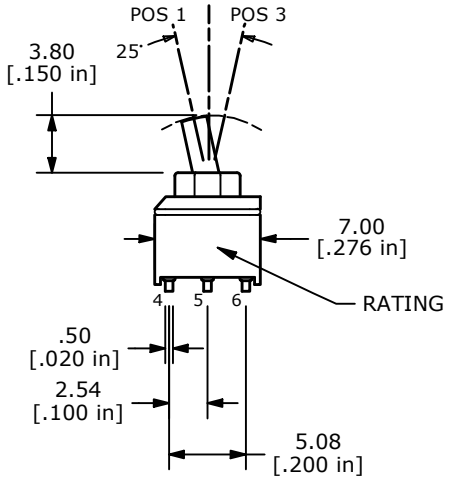
NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. CONTACTS/TERMINALS: GOLD PLATED OVER NICKEL PLATED
5. RATING: 0.4 VA max. @ 20V AC or DC Max.
6. CONTACT RESISTANCE: 100m OHM Max.
7. ELECTRICAL LIFE: 6,000 CYCLES
8. MECHANICAL LIFE: 40,000 CYCLES
9. INSULATION RESISTANCE: 500M OHM min.
10. DIELECTRIC STRENGTH: 500 V RMS @ SEA LEVEL
11. OPERATING TEMP.: -30°C to 85°C
12. ▲ DENOTES CRITICAL PARAMETER.
13. SEAL RATING: IP67

| REV | ECO NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| D | ECO-103940 | Print update | 02/26/26 | MW |
| | | | | |
| | | | | |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E·SWITCH®

OBJECT ID 000024883

TITLE 200USP1T1A1M6RE

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 2:1 | 2/12/2010 | RC | T250001 | D |