


SHEET 1 OF 1

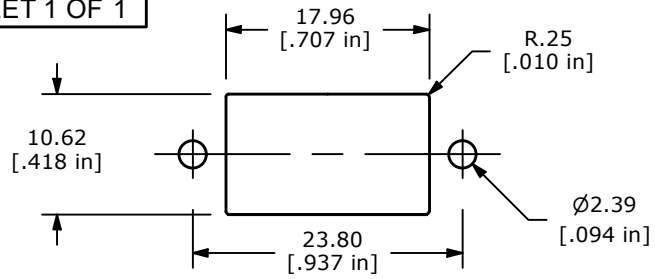

PANEL MOUNTING

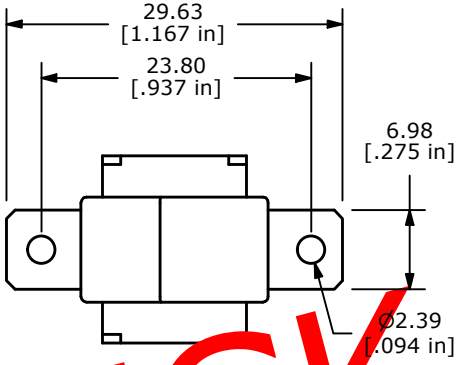





▲


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	(ON)
2-3, 5-6, 8-9	NONE	2-1, 5-4, 8-7

( ) DENOTES MOMENTARY FUNCTION

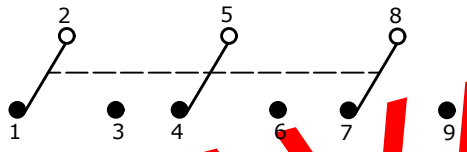

3PDT CIRCUIT

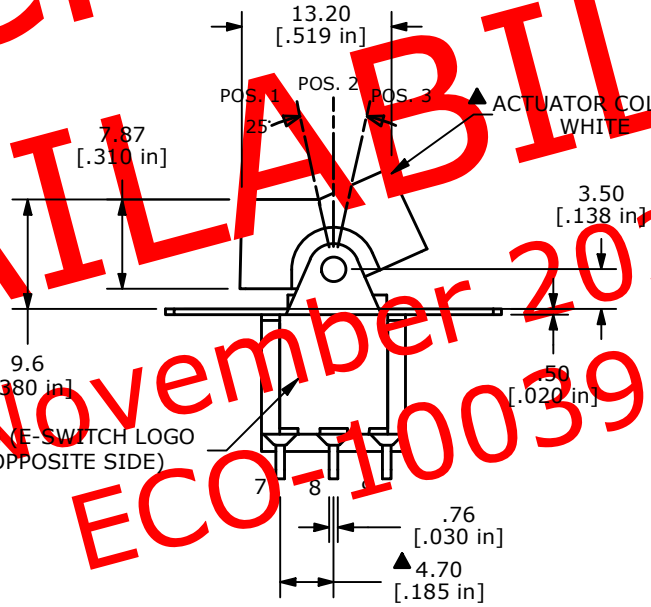

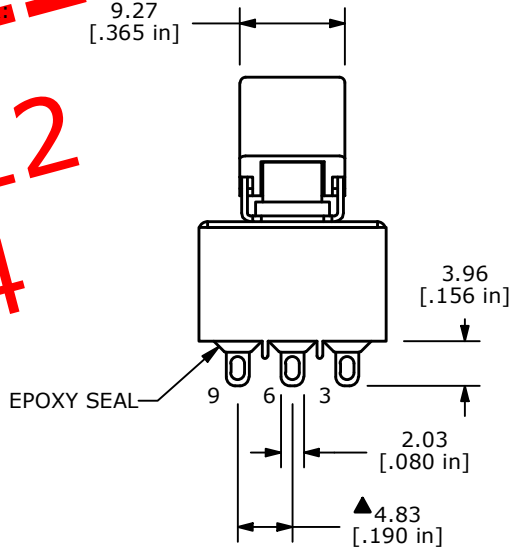

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. PLATING MATERIAL: SILVER
▲5. RATING: 2 AMPS @250VAC
   5 AMPS @120VAC OR 28VDC
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. CONTACT RESISTANCE: 100mA
9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2011/65/EU (ROHS) COMPLIANT

CHECK AVAILABILITY
November 2022
ECO-100394

REV	PCR NO	DESCRIPTION	DATE	BY
B	22605	UPDATED DIMENSION 29.36 TO 29.63	12/2/16	MJR
A	21722	New Prelease	11/18/14	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000025300

TITLE 3003P2R1WHTM1QE

SCALE	DATE	DR	DWG	REV
3:2	11/18/2014	rc	T333015	B