



SHEET 1 OF 1

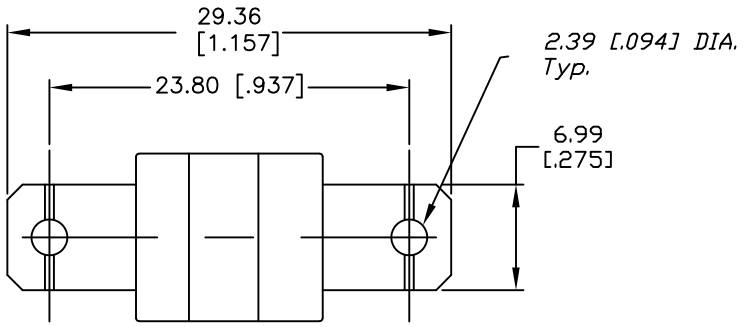

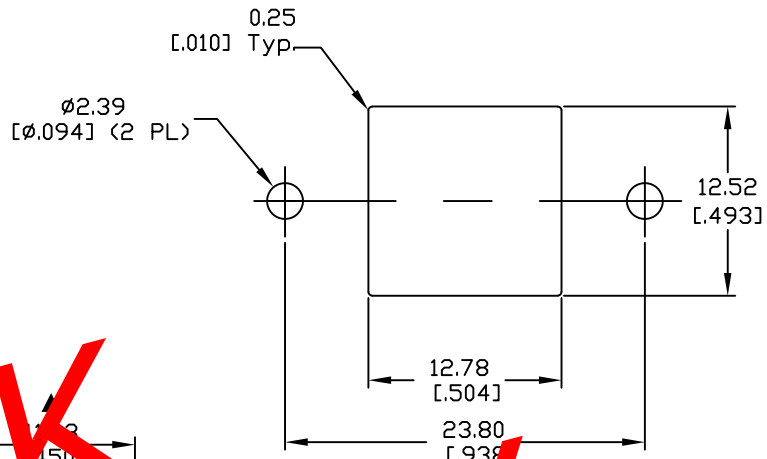

RECOMMENDED PANEL MOUNTING

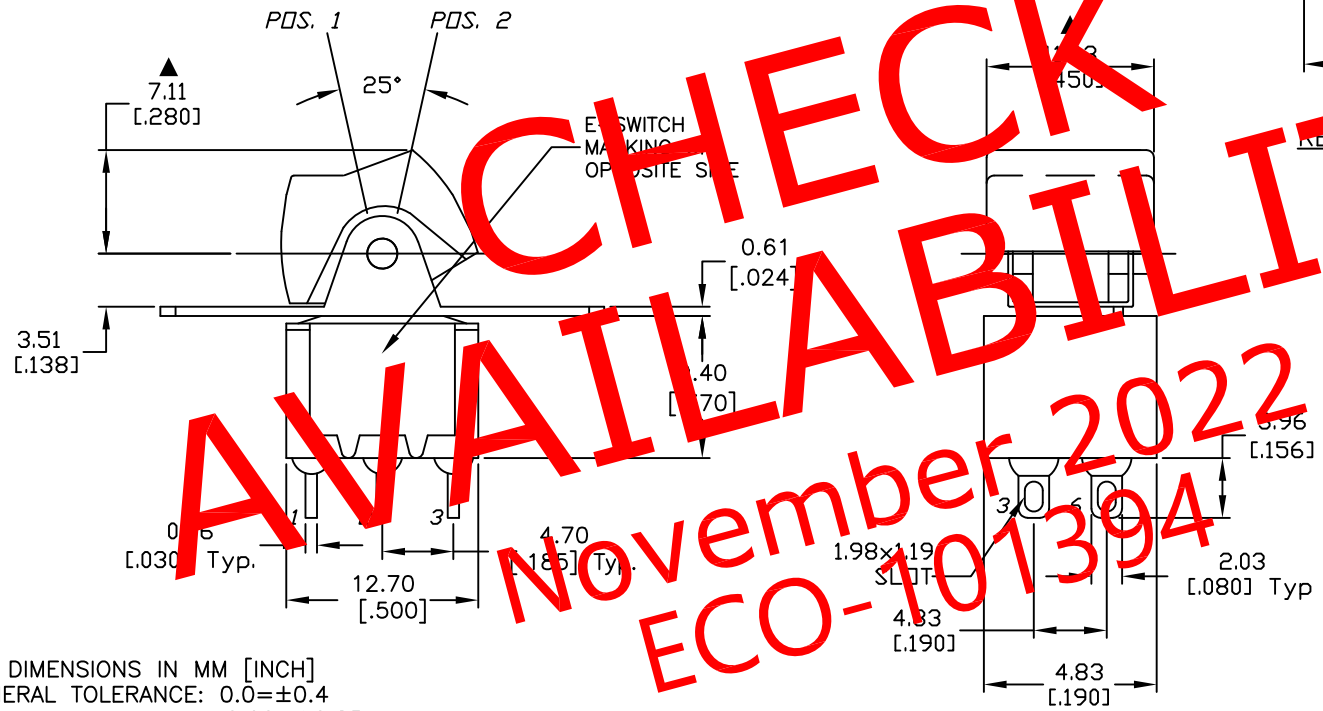



CIRCUIT: DPDT
CONTACT CONFIGURATION

CHECK AVAILABILITY
November 2022
ECO-101394

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: 0.0=±0.4
   0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ▲ CONTACT RATING: 5 Amps @120VAC or 28VDC;
   2 Amps @250VAC.
5. ELECTRICAL LIFE: 50,000 make-and-break cycles
   full load.
6. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
7. OPERATING TEMP.: -30°C to 85°C
8. ▲ DENOTES CRITICAL PARAMETER.

▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13410	RELEASED FOR PRODUCTION	8/28/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 300DP1R11BLKM1QE

SCALE	DATE	DR	DWG	REV
2:1	8/28/03	AR	T321064	A