


SHEET 1 OF 1

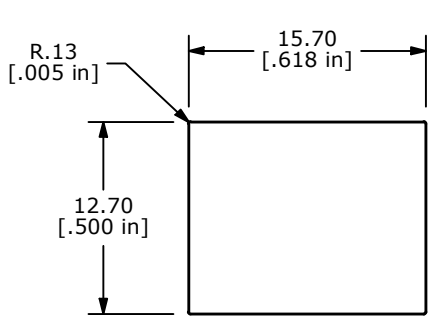


RECOMMENDED PANEL MOUNTING
PANEL THICKNESS: 1.19 - 3.18mm

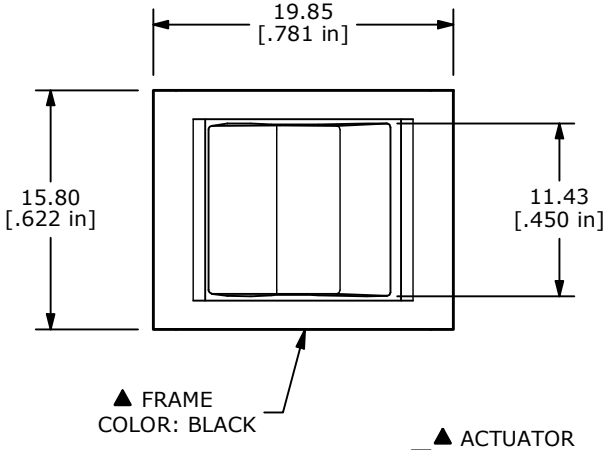





▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3	N/A	2-1



CIRCUIT: SPDT

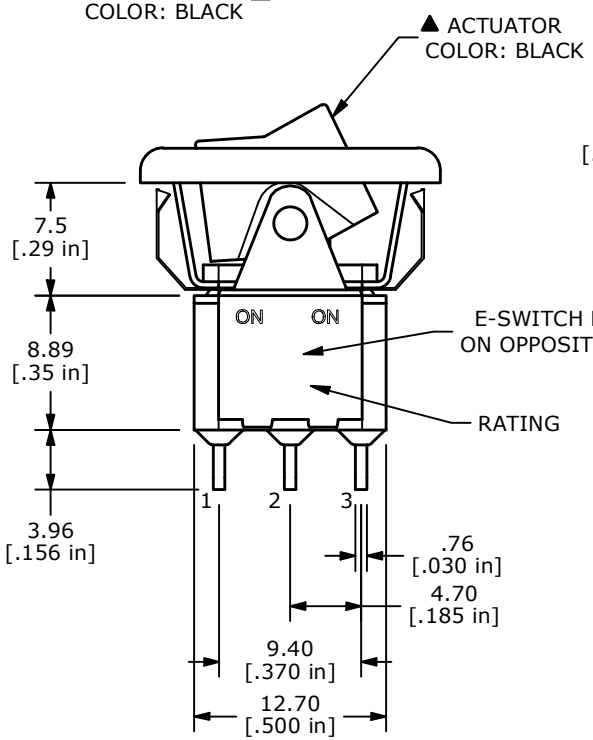

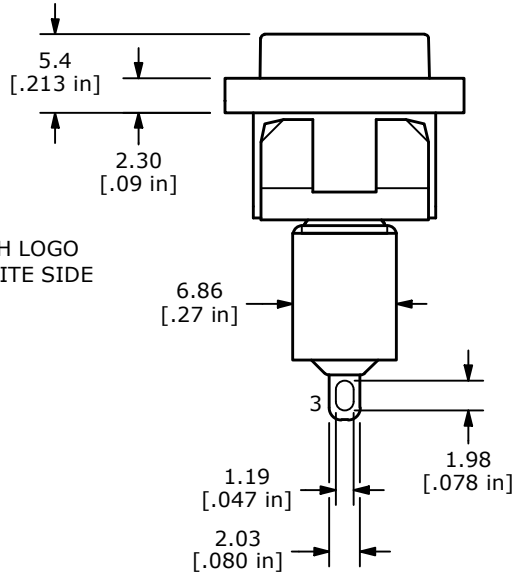

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲ 4. PLATING MATERIAL: SILVER
5. RATING: 2A @250VAC
   5A @120VAC or 28VDC
6. CONTACT RESISTANCE: 10mΩ max. initial @ 2-4 VDC
7. ELECTRICAL LIFE: 6,000 make-and-break cycles
   at full load.
8. INSULATION RESISTANCE: 1,000MΩ min.
9. DIELECTRIC STRENGTH: 1,000 V RMS @ sea level
10. OPERATING TEMP.: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-104093	Print update	04/30/26	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

OBJECT ID 000025022

TITLE 300SP1R6BLKM1QEBLK

SCALE	DATE	DR	DWG	REV
2:1	5/31/2002	CB	T311015	C