



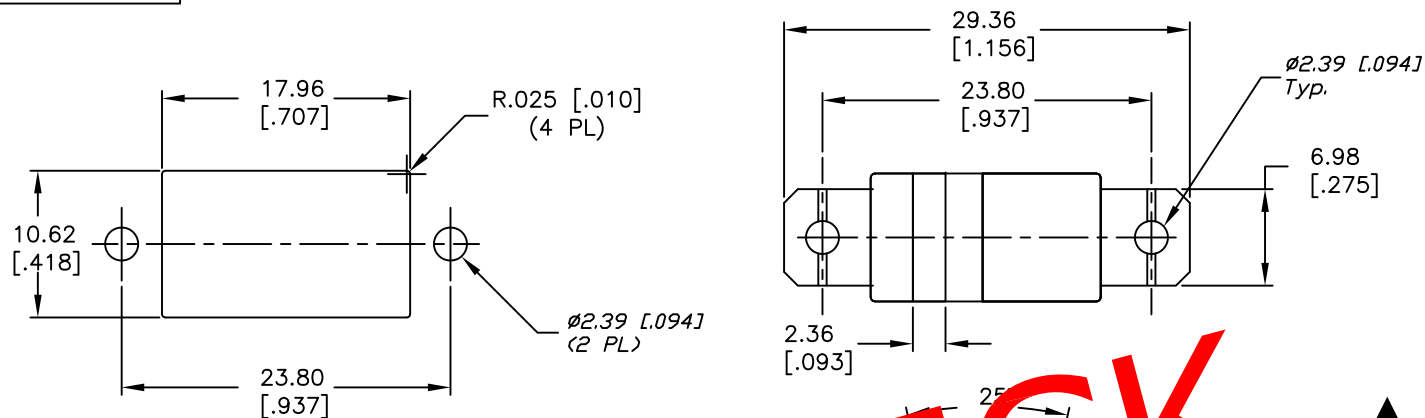

RECOMMENDED PANEL MOUNTING



CIRCUIT: SPDT


CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS.	PDS. 3
ON	NONE	<ON>
2-3	OPEN	2-1

$\langle \square N \rangle = \text{MOMENTARY}$

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4;
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 0.4 (VA) MAX. @ 20V MAX. (AC or DC)
5. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
6. INSULATION RESISTANCE: 1,000M ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level
8. OPERATION TEMP.: -30°C to 85°C

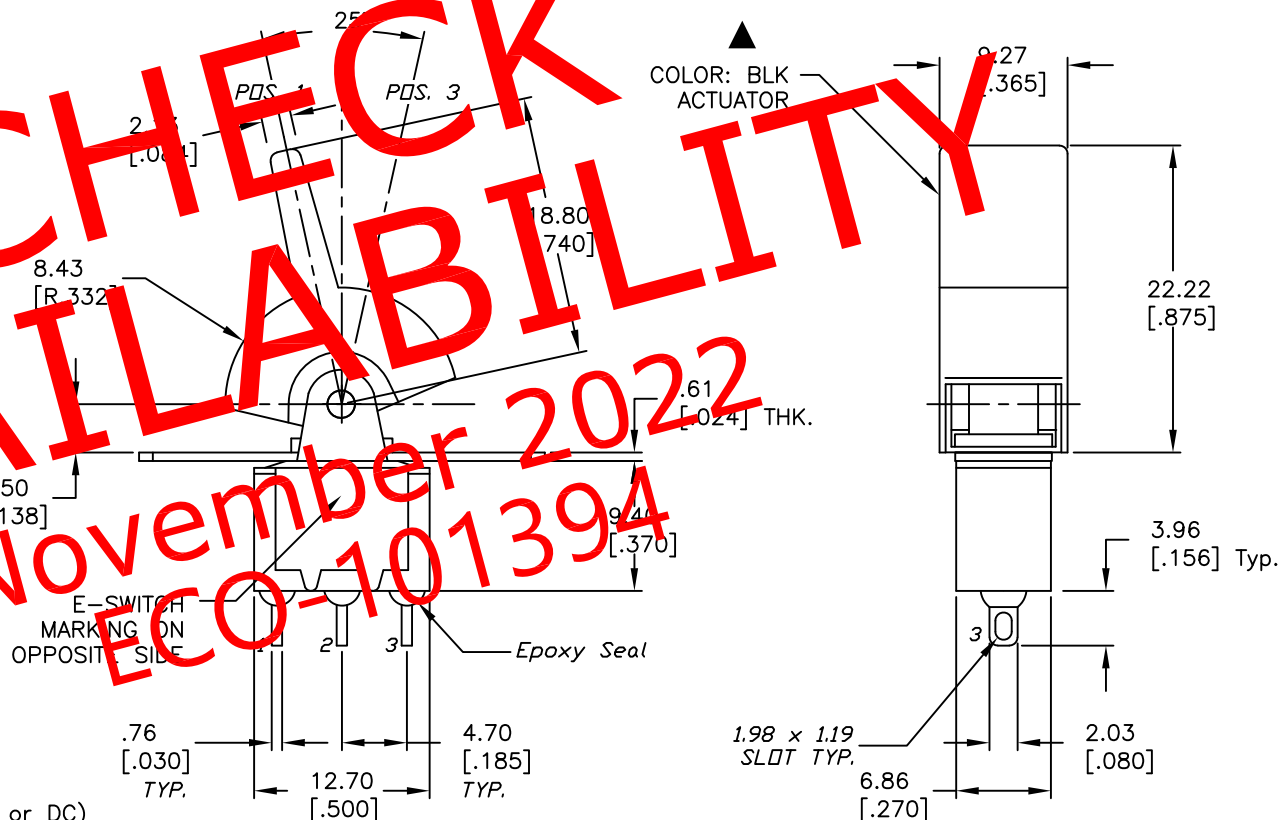

TITLE

300SP2R2BLKM1RE

SCALE

2:1

DATE _____

1/22/04

DR

 AR

DWG

T312017

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED