



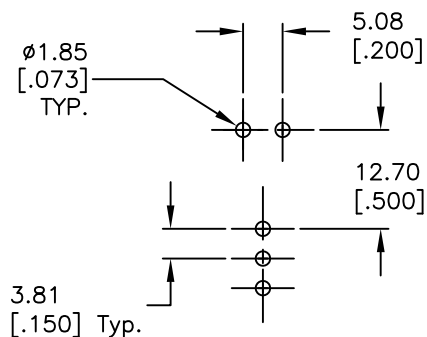

RECOMMENDED P.C.B. LAYOUT
NOT TO SCALE




CIRCUIT: SPST

SWITCH FUNCTION		
<i>POS. 1</i>	<i>POS. 2</i>	<i>POS. 3</i>
		
<i>ON</i>	<i>OFF</i>	<i>ON</i>
<i>2-3</i>	<i>OPEN</i>	<i>2-1</i>

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver Plate
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ROCKER SEPARATEFROM SWITCH.

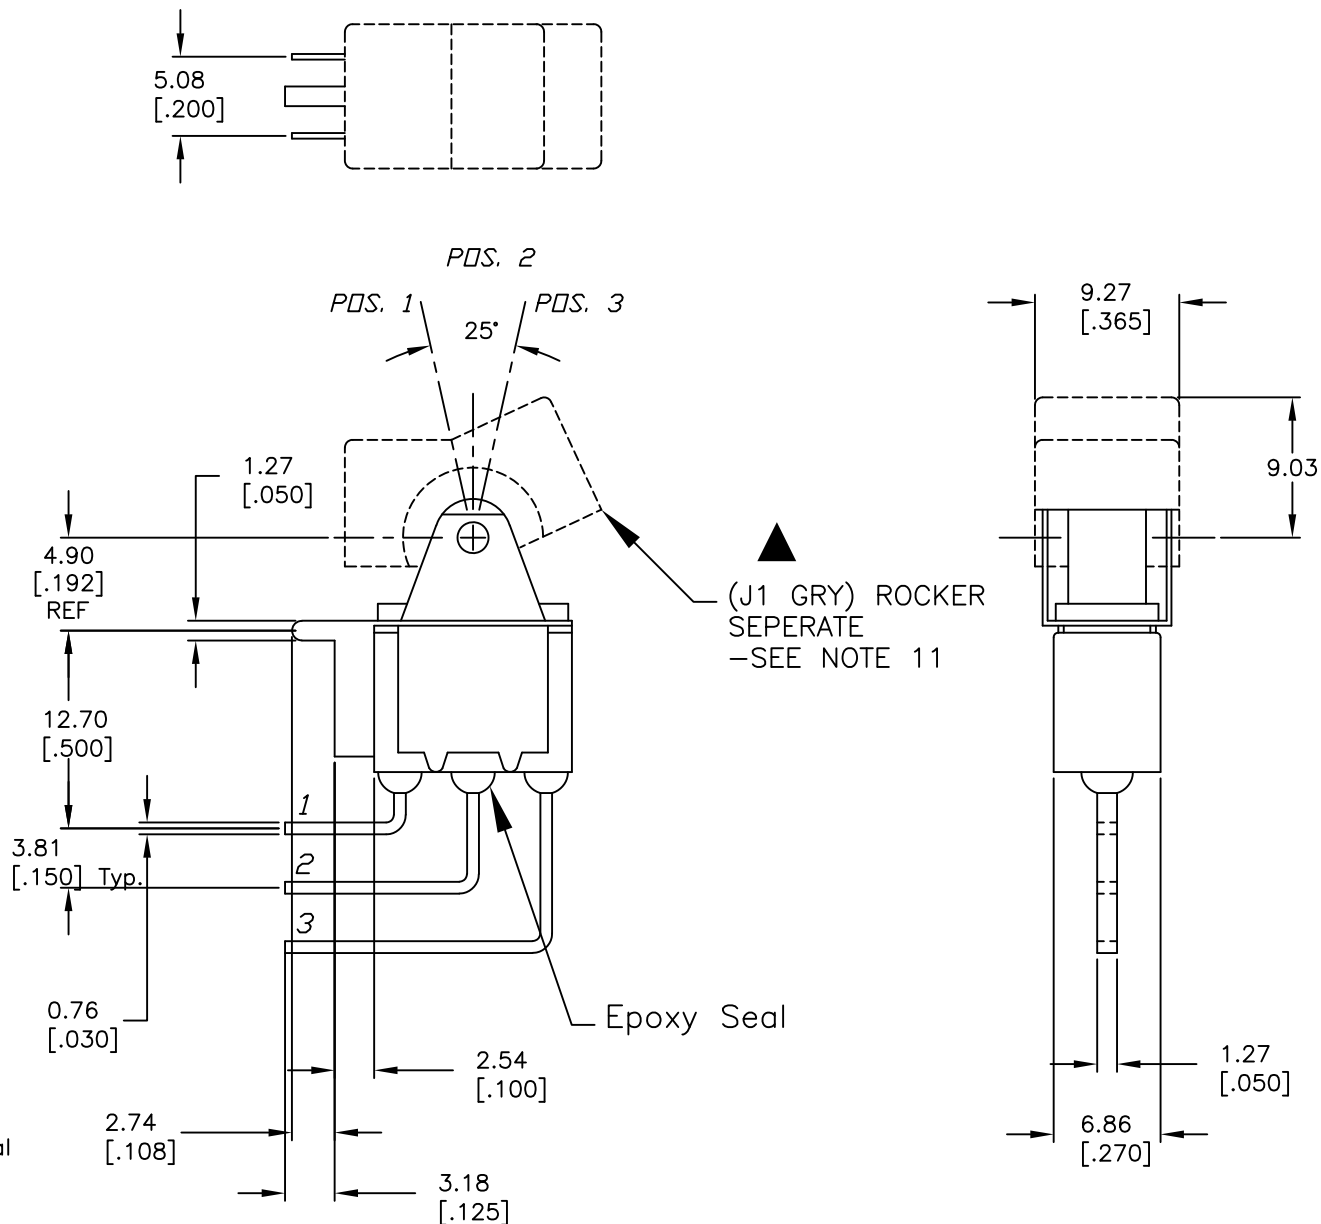

A	11992	RELEASED FOR PRODUCTION	3/7/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

				
TITLE <i>300 SP-3 (J1 GRY) M7 QE -NO CAP ROCKER SEPERATE FROM SWITCH</i>				
SCALE <i>2:1</i>	DATE <i>3/7/02</i>	DR <i>CJB</i>	DWG <i>T311052</i>	REV <i>A</i>